

# BT-NONABEAM - BQ1

05513

## DESCRIPTION

Create dynamic 'light curtain effects' with this extremely powerful stage projector, based on 9pcs 60W CW/WW LEDs in combination with amazing RGB glow effects.

## FEATURES

- This impressive new projector is developed for use on big concert stages, TV-studios, ...
- The 9 big lenses are each equipped with 60W CW/WW LEDs that produce powerful narrow white 4° beams. (full on: 175'000 lux @3m)
- In a very short time several projectors can be mechanically mounted together to create dynamic "light curtain" effects with unsurpassed power !
- The LEDs can be individually controlled to produce tunable white beams, ranging from warm 3000K with high CRI to 6000K cold white.
- Very powerful RGB-LEDs light up the black front panel in any desired color.
- The units includes 2 extra front panels that can be swapped easily:
  - The white front panel is used to produce very bright and saturated RGB "glow effects"
  - The semi-transmissible "mirror" front panel creates amazing creative effects simply by pointing lasers and light beams at it.
- The 9 lenses are equipped with black anti-glare louvers, gold color louvers are optionally available. (set 9pcs)
- 3 DMX-modes: 13, 29 and 45 channels mode for individual control of all beams and functions using 16bit dimming.
- Control channel for remote selection of PIXEL-order, dimmer speed, dimmer curve, fan control, ...)
- RDM-function for: channel mode, DMX-address, temperature control, ...
- OLED display with backlit touch buttons for easy configuration.
- Easy mechanical installation with 2 included omega brackets.
- Easily removable suspension bracket with quick locks.
- Several M10 fixing points can be used to install the projectors in custom frames.
- Very low-noise fans, perfect for use in noise sensitive places like theatres, TV-studios, ...
- Easy daisy chaining: 3pin & 5pin + Neutrik® PowerCON® TRUE-1 in/out.
- Compact size (58 x 22 x 14cm) for easy transport in flight cases!
- Optional 60x120cm flight cases (4 projectors) available.
- Optional gold louvers (set of 9 pcs).
- Co-designed with Marijn Broeckart.




[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.

## TECHNICAL SPECIFICATIONS

|   |   |
|---|---|
| <b>General : Application</b>              | DJ & Club, Stage & Rental, Theatre        |
| <b>General : Dimensions (cm)</b>          | 58 x 22 x 14cm (without bracket)          |
| <b>General : Weight (kg)</b>              | 16  |
| <b>General : Powerinput</b>               | AC 100 - 240V, 50/60Hz                    |
| <b>General : Energy Label</b>             | No  |
| <b>General : Color</b>                    | black                                     |
| <b>General : Display</b>                  | OLED                                      |
| <b>General : Fixation</b>                 | included omega bracket                    |
| <b>General : IP rating</b>                | indoor                                    |
| <b>Control : manual</b>                   | No  |
| <b>Control : Master/Slave</b>             | Yes                                       |
| <b>Control : SMART-DMX</b>                | No  |
| <b>Control : Standalone</b>               | no  |
| <b>Control : programmable</b>             | No  |
| <b>Control : upgradable software</b>      | Yes                                       |
| <b>Control : maximum DMX channels</b>     | 45  |
| <b>Light : lamp socket</b>                | none                                      |
| <b>Light : lamp</b>                       | LED                                       |
| <b>Light : min. color temperature (K)</b> | 3000                                      |
| <b>Light : max. color temperature (K)</b> | 6000                                      |
| <b>Light : colors</b>                     | Cold white, Warm white, RGBW              |
| <b>Light : mix colors</b>                 | Yes                                       |
| <b>Light : focus</b>                      | No  |
| <b>Light : zoom</b>                       | No  |
| <b>Light : iris</b>                       | No  |
| <b>Light : min. beam angle (°)</b>        | 4   |
| <b>Light : max. beam angle (°)</b>        | 4   |
| <b>Light : min. refresh rate (kHz)</b>    | 1.2                                       |
| <b>Light : max. refresh rate (kHz)</b>    | 1.2                                       |
| <b>Connections : input</b>                | 3 pin XLR, 5 pin XLR, TRUE1 powerCON, rdm |
| <b>Connections : output</b>               | 3 pin XLR, 5 pin XLR, TRUE1 powerCON      |
| <b>Brand</b>                              | BRITEQ                                    |
| <b>EANCode</b>                            | 5420025655132                             |
| <b>Discontinued</b>                       | No  |

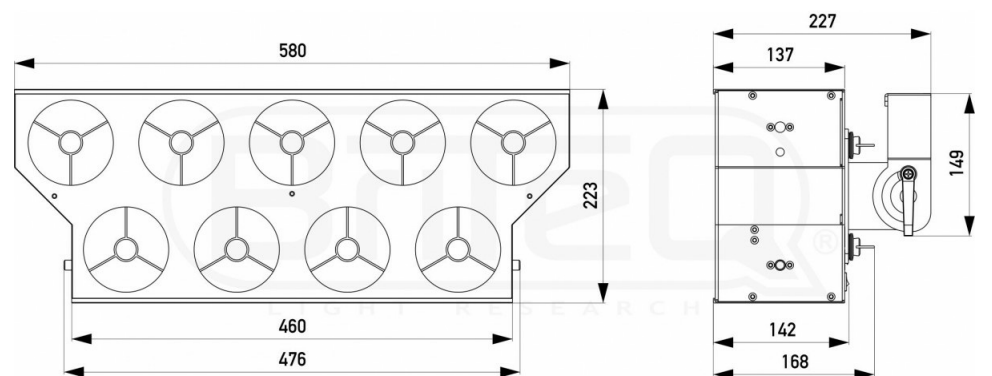

[www.briteq-lighting.com](http://www.briteq-lighting.com) | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.