


# NETKIT-IR

NETKIT-Ethernet to IR convertor

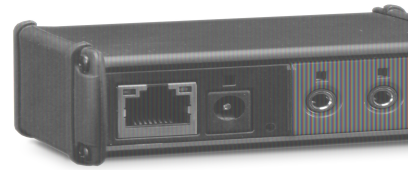

NETKIT-IR makes it possible to design and integrate a low-cost custom control system for our products and other devices with infrared control possibilities. It allows easy integration with pc, Mac, iPhone/iPad and Android devices via freely available software applications. Now you can seamlessly connect a laptop and control any infrared device over a LAN-network and the internet. You can use third party software to operate the Netkits via home control units, tablets or smartphones.

This product allows a custom user interface to be designed and uploaded to an iPad or similar device. Many products in our range can be controlled via NETKIT-IR via their infrared control interface, including SDQ5PIR, CONCEPT1, PMR4000R, PR4000R, PR1000R, PCR3000RMKII and PC1000RMKII.

We have developed the Command Fusion guiDesigner library files for all controllable products in our range. These files are available on request.

The NETKIT-IR units include 3 configurable in/outs and has a built-in IR learning. An embedded web server allows easy configuration from any web browser.

It provides a new level of automation and control flexibility, enabling device networking in your home, hotels, restaurants, meeting rooms and many other applications.

## TECHNICAL SPECIFICATIONS

<b>ethernet connection</b>	10/100 Mbit/s	<b>integrated web server</b>	yes
<b>DHCP compatible</b>	yes	<b>ethernet connector</b>	RJ45
<b>included power supply</b>	5 - 16Vdc 300mA	<b>output connector</b>	3 x 3.5mm jack IR emitter
<b>bi directional</b>	no	<b>IR emitters</b>	3 included
<b>IR receiver for IR learning</b>	yes	<b>free software</b>	Netkit Help + Netkit Learn
<b>width in mm</b>	82.5	<b>height in mm</b>	31.8
<b>depth in mm</b>	57.2	<b>weigth (ex power supply) in gr</b>	92
<b>Net weight product (kg)</b>	0.20		

MORE PICTURES

