




Visit product page

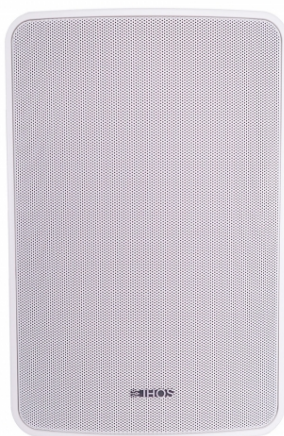

CLIMATE IP6 -PEARL

L005759

High Quality public address 2 way speaker, dust-proof and waterproof IP55, 100/70V and 8Û, U type steel bracket included, ideal for out door installations, max input 90W/100V , 180W/8Û, SPL 90 dB, 6.5?? Woofer + 1?? Tweeter, rugged HIPS white housing

TECHNICAL DETAILS

Technical Specifications

Rate Power: 60W@100V; 90W@8Û.

Max Power: 90W@100V; 180W@8Û.

Impedance: 83Û, 167Û, 333Û, 667Û, 1.33kÛ.

Power Select: 100V: 60W, 30W, 15W, 7.5W; 70V: 60W, 30W, 15W, 7.5W, 3.75W.

S.P.L(1W / 1m): 90dB.

MAX S.P.L(Rated / 1m): 108dB@100/70V; 110dB@8Û.

Frequency Response(-10dB): 70Hz~20kHz.

Spread Angle (4kHz / 1kHz): 90° / 190°.

Power Select Operate: Rotating Selection Switch.

Material: Housing: HIPS; Grille: Steel.

Operate Temp/ Humidity: -30°C ~ 60°C; <95%.

Dustproof/ Waterproof degree: IEC529 IP55.

Speaker Unit: 6.5"Woofer + 1"Tweeter.

Size: 214 (W) x 329(H) x 178(D).

Net Weight: 4.8kg.

Installation: U Type Mounting Bracket or Optional Other Bracket.

PHOTOS



PRODUCT VIDEO





www.fos-lighting.eu

