




# APart

## APart MA65 MIXING AMPLIFIER

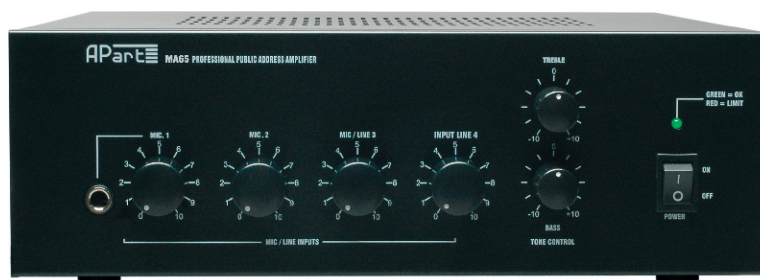

The Apart MA65 is probably the most complete and compact 65 watt 100 Volt mixing desktop amplifier. The amplifier has 4 inputs: 2 MIC, 1 MIC-LINE and 1 LINE. The microphone inputs can have phantom power via an internal jumper.

A two step priority system is standard: MIC1 can have voice activated priority (VOX) that mutes all other inputs. This VOX mute can be switched off via an internal jumper. The contact closure (via DIN5 on MIC1 or Euroblock on MIC1-2) will activate the chime and will mute input 3 (MIC3/LINE3) and 4.

The pre-amp out, power-amp input allows you to insert extra signal processors or to link the signal to other power amplifiers.

Further the MA65 is equipped with a bass - treble tone control, a record output and limiter circuit on the output to avoid clipping.

MA65 can operate with a 24V and 230V power supply. The amplifier has been build into a compact and sturdy metal housing. A 19" mounting bracket (Ref: MA35-19) is available as an option for rack mounting.

In brief, MA65 has all the features a contractor needs!

## TECHNICAL SPECIFICATIONS

Input	MIC1 (Front / Rear)	Bal. Jack / Bal XLR - DIN5 (1mV)
	MIC2	Bal. Jack - XLR (1mV)
	MIC3/LINE3	Bal. Jack - XLR (1mV) / RCA Cinch (300 mV)
	LINE4	RCA Cinch (300 mV)
	Power amp in	RCA Cinch (1V)
Output Power RMS		
	Rated	65 watt
	Music- Program	80 watt
Speaker outputs		8 Ohm, 70 - 100 Volt (Euroblock)
Pre amp out		RCA Cinch (1V)
Record out		RCA Cinch (350 mV)
Chime		Yes (ding-dong) via contact closure (Euroblock)
Priority system		2-step priority mute system (VOX / contact closure)
Limiter		Dynamic-slow @ -3 dB, defeatable via internal jumper.
Frequency Range		60 Hz - 18 kHz
S/N Ratio		-67dB (mic open), -77dB (all at zero)
Distortion		< 0.5%
Power supply		24V DC (Euroblock)- 230V AC
Dimensions (H x W x D)		88 x 272 x 286 mm
Weight		6.4 Kg