

loving **U.**

LD
SYSTEMS® **PRO AUDIO**
IN MOTION



DESIGNED & ENGINEERED IN GERMANY



Listen to the **"The Wireless U Sessions"** on YouTube
<http://bit.ly/wireless-u-sessions>

Artist: Kiddo Kat

U500[®] SERIES

Listening to your suggestions, we have designed the U500[®] Series to make advanced technology and superb sound most affordable for professional users. Available for vocals, instruments and conferencing, the audio quality, reliability and straightforward operation of U500[®] wireless systems will exceed your expectations.

With automatic channel scanning, convenient one-touch infrared synchronizing and high-contrast OLED displays for easy menu navigation, battery level indication and user name assignment the U500[®] Series true diversity UHF wireless systems are quick and intuitive to set up. Up to 30 mW selectable transmitter output and pilot tone squelch circuitry provide superior signal quality free of artefacts and more than 100 m line-of-sight operating range.

A choice of replacement microphone heads enables flexible handheld applications. With switchable line and instrument output levels the single and dual receivers facilitate direct connection to guitar and bass amps, and the 30 Hz – 16 kHz frequency response covers all bass guitar applications.

The U500[®] Conference System is expandable to a maximum of 20 microphone units for effective communication with excellent speech intelligibility.





U500[®] SERIES

PROFESSIONAL WIRELESS
MICROPHONE SYSTEMS

..... PAGE 6



U500[®] SERIES

PROFESSIONAL WIRELESS
INSTRUMENT SYSTEMS

..... PAGE 12



U500[®] SERIES

4-CHANNEL WIRELESS
CONFERENCE SOLUTION

..... PAGE 18





loving **U.**



U500[®] SERIES PROFESSIONAL WIRELESS **MICROPHONE SYSTEMS**

Making professional technology and sound most affordable, the U500[®] Series has been designed around you. We listened to your feedback and are now introducing a wireless system for live vocals with amazing performance and reliability that is sure to surpass your expectations.

With a focus on pro and semi-pro users, our engineering and development created the U500[®] Series so you can share your emotions and great onstage moments.



INTERCHANGEABLE MIC HEADS

Tune your handheld transmitter with interchangeable microphone heads! Four screw-on dynamic and condenser capsules are available with cardioid or hypercardioid patterns to cover virtually all voice characteristics and applications.

WE DO THE HARD WORK

Automatic channel scanning allows quick and easy selection of interference-free radio frequencies. Receiver and transmitter are synced via infrared in a convenient one touch operation.

GAIN CONTROL

The handheld and bodypack transmitters feature a gain control putting level adjustment right at your fingertips. The screw-on dynamic and condenser microphone capsules are easily interchangeable.



OLED DISPLAY

U500 Series components feature high-contrast OLED displays for easily readable status indication even under adverse conditions. Designed and engineered in Germany, U500 systems provide maximum performance and reliability.

READY TO GO

All U500 systems come with a rugged ABS transport case to hold and protect your wireless mic. Ready to go, ready to gig!




PILOT TONE FOR NOISE-FREE OPERATION

Inaudible for the human ear a pilot tone is added to the transmitter signal. To prevent noise from interfering signals the receiver is automatically muted if it detects no pilot tone to prevent noise from interfering signals. Transmission power is switchable to 2, 10 or 30 mW.

ALL THE WAY ACROSS A FOOTBALL PITCH

With a line-of-sight operating range of more than 100 metres, U500 systems cover the length of a football pitch! The transmitter's very low current draw allows up to 10 hours of continuous operation with a pair of AA batteries.

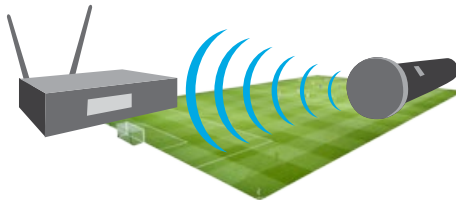

U500[®] SERIES

SINGLE MICROPHONE SYSTEMS



U5XX* HHC
WIRELESS MICROPHONE SYSTEM
WITH CONDENSER HANDHELD MICROPHONE



U5XX* BPH
WIRELESS MICROPHONE SYSTEM
WITH BODYPACK AND BLACK HEADSET



U5XX* HHD
WIRELESS MICROPHONE SYSTEM
WITH DYNAMIC HANDHELD MICROPHONE



U5XX* BPHH
WIRELESS MICROPHONE SYSTEM
WITH BODYPACK AND SKIN-COLOURED HEADSET



U5XX* BPL
WIRELESS MICROPHONE SYSTEM
WITH BODYPACK AND LAVALIER MICROPHONE

*Replace the XX with the desired version underneath to choose your frequency band:

U505 // 584 - 608 MHz // simultaneous operation of 12 systems
U506 // 655 - 679 MHz // simultaneous operation of 12 systems
U508 // 823 - 832 MHz + 863 - 865 MHz // simultaneous operation of 6 systems
U506 UK // 606 - 614 MHz // n.a.
U518 // 1785 - 1800 MHz // n.a.

For a current list of frequency bands and country compatibilities,
visit www.ld-systems.com/u500

U500[®] SERIES

DOUBLE MICROPHONE SYSTEMS



U5XX* HHC2
WIRELESS MICROPHONE SYSTEM
WITH 2 x CONDENSER HANDHELD MICROPHONES



U5XX* HDD2
WIRELESS MICROPHONE SYSTEM
WITH 2 x DYNAMIC HANDHELD MICROPHONES





U5XX* BPH2
WIRELESS MICROPHONE SYSTEM
WITH 2 x BODYPACKS AND 2 X HEADSETS




U5XX* BPHH2
WIRELESS MICROPHONE SYSTEM
WITH 2 x BODYPACKS AND 2 X HEADSETS SKIN-COLOURED

DYNAMIC MICROPHONE


CONDENSER MICROPHONE

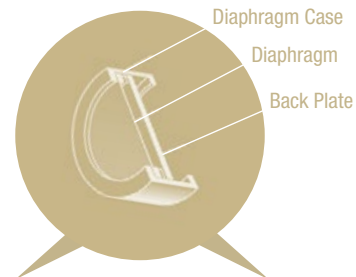


U500 DC
DYNAMIC CARDIOID
MICROPHONE HEAD




U500 DH
DYNAMIC HYPERCARDIOID
MICROPHONE HEAD



U500 CC
CONDENSER CARDIOID
MICROPHONE HEAD



U500 CH
CONDENSER HYPERCARDIOID
MICROPHONE HEAD



SPECIFICATIONS

RECEIVER:

| | |
|-------------------------|--|
| Product type: | receiver |
| Type: | true diversity |
| Antenna inputs: | 2 |
| Antenna connector: | BNC |
| Frequency response: | 30 - 16,000 Hz |
| Noise reduction: | adjustable squelch |
| THD: | < 0,3 % |
| Signal-to-noise ratio: | > 100 dB pilot tone squelch |
| Audio output, balanced: | XLR - 12 dBV / 6.3 mm TRS - 18 dBV |
| Controls: | POWER on/off, MENU push-turn-control, VOL Volume control, switch INSTRUMENT/LINE |
| Indicators: | OLED Display |
| Operating voltage: | 12 - 18 V DC |
| Width: | 212 mm |
| Height: | 45 mm |
| Depth: | 163 mm |
| Weight: | 0.91 kg |

MICROPHONE:

| | |
|------------------------|--|
| Product type: | handheld transmitter |
| Microphone type: | dynamic / condenser |
| Directivity: | cardioid / hypercardioid |
| Frequency response: | 60 - 16,000 Hz |
| Rated HF output power: | 2 mW, 10 mW, 30 mW (switchable) |
| Controls: | power on/off, menu, set |
| Indicators: | OLED display |
| Operating voltage: | 2 x AA battery |
| Operating time: | up to 10 h, depending on battery type |
| Length: | 257 mm |
| Diameter: | 51 mm |
| Weight: | 0.25 kg |
| Other features: | pilot tone, switchable gain, switchable RF power, interchangeable mic head |

BODYPACK:

| | |
|------------------------|---|
| Product type: | bodypack |
| Groups: | 8 |
| Inputs: | Mini-XLR (3-pin) |
| Frequency response: | 30 - 16,000 Hz |
| Rated HF output power: | 2 mW, 10 mW, 30 mW (switchable) |
| Controls: | menu, set, power on/off |
| Indicators: | OLED display |
| Operating voltage: | 2 x AA battery |
| Operating time: | up to 10 h, depending on battery type |
| Width: | 65 mm |
| Height: | 86 mm |
| Depth: | 23 mm |
| Weight: | 0.09 kg |
| Other features: | pilot tone, switchable gain, switchable RF power, detachable antenna, |



loving
U.



U500[®] SERIES

PROFESSIONAL WIRELESS INSTRUMENT SYSTEMS

Whether you play guitar, bass, wind or bowed string instruments, the U500[®] Series has been designed around you. Making professional technology and sound most affordable, we have listened to your feedback and are now introducing a wireless instrument system with amazing performance and reliability that is sure to surpass your expectations. With a focus on pro and semi-pro users, our engineering and development created the U500[®] Series so you can share your emotions and great onstage moments.



30Hz EXTENDED LOW END

With an extended frequency response down to 30 Hz, the U500 Instrument Sets are a perfect choice for 5 or 6 string bass guitars fully covering the low B.



WE DO THE HARD WORK

The automatic channel scan allows quick and easy selection of an interference free frequency which is synced with the transmitter over infrared in a convenient one touch operation.



GAIN CONTROL

The bodypack transmitters feature a gain control putting level adjustment right at your fingertips. The digital gain level can be adjusted from 0 to -27 dB in 3 dB steps.



OLED DISPLAY


U500 Series components feature high contrast OLED displays for easily readable status indication even under adverse conditions. Designed and engineered in Germany, U500 systems provide maximum performance and reliability.

PILOT TONE FOR NOISE FREE TRANSMISSION

Inaudible for the human ear a pilot tone is added to the transmitter signal. The receiver is automatically muted if it detects no pilot tone to prevent noise from interfering signals. Transmission power is switchable to 2, 10 or 30 mW.

ALL THE WAY ACROSS A FOOTBALL PITCH

The U500 systems sport an outdoor transmission range of more than a 100 meters - that's the length of a soccer field! The transmitters' very low current draw allows up to 10 hours of continuous operation with a pair of AA batteries.

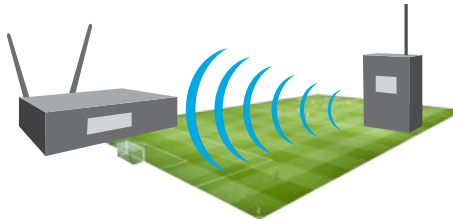

READY TO GO

All U500 systems come with a rugged ABS transport case to protect and keep your wireless mic. Ready to go, ready to gig!



U500[®] SERIES

SINGLE INSTRUMENT SYSTEMS



U5XX* BPG
WIRELESS MICROPHONE SYSTEM
WITH BODYPACK AND GUITAR CABLE



U5XX* BPW
WIRELESS MICROPHONE SYSTEM
WITH BODYPACK AND BRASS
INSTRUMENT MICROPHONE

SPECIFICATIONS

RECEIVER:

| | |
|-------------------------|--|
| Product type: | receiver |
| Type: | true diversity |
| Antenna inputs: | 2 |
| Antenna connector: | BNC |
| Frequency response: | 30 - 16,000 Hz |
| Noise reduction: | adjustable squelch |
| THD: | < 0,3 % |
| Signal-to-noise ratio: | > 100 dB pilot tone squelch |
| Audio output, balanced: | XLR - 12 dBV / 6.3 mm TRS - 18 dBV |
| Weight: | 0.91 kg |
| Controls: | POWER on/off, MENU push-turn-control, VOL Volume control, switch INSTRUMENT/LINE |
| Indicators: | OLED Display |
| Operating voltage: | 12 - 18 V DC |
| Width: | 212 mm |
| Height: | 45 mm |
| Depth: | 163 mm |
| Accessories (included): | 2 x HF antennas, 2x AA batteries |

BODYPACK:

| | |
|------------------------|---|
| Product type: | bodypack |
| Groups: | 8 |
| Inputs: | Mini-XLR (3-pin) |
| Frequency response: | 30 - 16,000 Hz |
| Rated HF output power: | 2 mW, 10 mW, 30 mW (switchable) |
| Controls: | menu, set, power on/off |
| Indicators: | OLED display |
| Operating voltage: | 2 x AA battery |
| Operating time: | up to 10 h, depending on battery type |
| Width: | 65 mm |
| Height: | 86 mm |
| Depth: | 23 mm |
| Weight: | 0.09 kg |
| Other features: | pilot tone, switchable gain, switchable RF power, detachable antenna, |

*Replace the XX with the desired version underneath to choose your frequency band:

U505 // 584 - 608 MHz // simultaneous operation of 12 systems

U506 // 655 - 679 MHz // simultaneous operation of 12 systems

U508 // 823 - 832 MHz + 863 - 865 MHz // simultaneous operation of 6 systems

U506 UK // 606 – 614 MHz // n.a.

U518 // 1785 – 1800 MHz // n.a.

For a current list of frequency bands and country compatibilities, visit www.ld-systems.com/u500



ACCESSORIES



WIN 42 AD
4-WAY ANTENNA **SPLIT BOX**



WS 100 AB
ANTENNA **BOOSTER**



WS 100 TNC
ANTENNA **CABLE** TNC TO TNC 0.5 m



WS 100 TNC 10
ANTENNA **CABLE** TNC TO TNC 10 m



WS 100 DA
DIRECTIONAL **ANTENNAS**



U500 GC
GUITAR **CABLE**



WS 100 MH1
HEADSET **MICROPHONE**



WS 100 MH3
HEADSET **MICROPHONE**
SKIN COLOURED



HSAE 1
PROFESSIONAL AEROBICS **HEADSET**
MICROPHONE WATER RESISTANT



WS 1000 MW
WIND **MICROPHONE**



WS 100 ML
LAVALIERE **MICROPHONE**

RACK MOUNTING KITS



U500 RK
19" RACK KIT FOR U500 SINGLE RECEIVER



U500 RK 2
19" RACK KIT FOR 2 x U500 SINGLE RECEIVER





it's all about **U.**



U500[®] SERIES

4-CHANNEL WIRELESS
CONFERENCE SOLUTION

Designed around you and for you, our engineering and development put their focus on professional users to create a wireless conference system for effective communication and interaction. Providing advanced technology and superb speech intelligibility, the U500[®] is a fully featured, elegant solution. This user-friendly system makes your job easier and conventions, meetings and discussions a success.




GAIN CONTROL & LOW CUT

Soft-spoken or powerful, the gain control lets you match the mic level to a speaker's voice. A switchable highpass filter prevents boominess when the speaker is too close to the microphone.



RECEIVER CASCADING

To extend the number of microphone units the U500 Receiver features audio and data ports for cascading up to five units. Sharing the antennas of the master unit they provide a maximum of 20 channels.

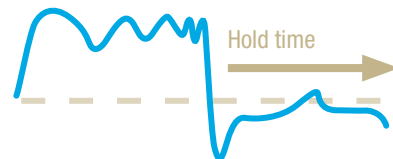

AUTO & MANUAL GATE

If a microphone unit's signal level falls below the threshold the gate mutes the respective channel to eliminate unwanted noise. Hold time determines how long the noise gate remains open after the input level has dropped below the threshold.

PILOT TONE FOR NOISE FREE TRANSMISSION

Inaudible for the human ear a pilot tone is added to the transmitter signal. The receiver is automatically muted if it detects no pilot tone to prevent noise from interfering signals.



INDIVIDUAL AND MIX OUTPUTS

The receiver sports individual XLR outputs for each of the 4 channels plus a mix output. This provides a summed signal of all the channels based on their individual level settings.

REMOVABLE GOOSENECK MIC

Featuring a luminous indicator ring, the gooseneck condenser microphone is detachable from the desktop base's XLR connector.



READY FOR REMOTE CONTROL

Providing an RS-232 interface, the receiver enables external control via remote systems.



SPECIFICATIONS

CONFERENCE RECEIVER:


| | |
|-----------------------------|--|
| Modulation type: | FM |
| Groups: | 6 |
| Channels: | 60 (6 x 10) |
| Antenna inputs: | 2 |
| Antenna connectors: | BNC |
| Frequency response: | 60 - 16,000 Hz |
| Noise reduction: | adjustable squelch (10 steps) |
| THD: | < 0,2 % |
| Signal-to-noise ratio: | > 100 dB |
| Audio outputs balanced: | 4 x XLR |
| Audio outputs mix balanced: | XLR |
| Max. output level: | +12 dBu |
| Controls: | power on/off, digital encoder, RX 1 - 4 quick access buttons |
| Indicators: | OLED display |
| Operating voltage: | 12 V DC, 1,000 mA |
| Width receiver: | 484 mm |
| Height receiver: | 44 mm |
| Depth receiver: | 243 mm |
| Weight receiver: | 2,45 kg |

CONFERENCE MICROPHONE:

| | |
|------------------------|--------------------------------|
| Channels: | 6 (6 x 10) |
| Groups: | 6 |
| Inputs: | XLR |
| Frequency response: | 60 - 16,000 Hz |
| Signal-to-noise ratio: | > 100 dB |
| Rated HF output power: | 10 mW |
| Controls: | low cut, power / mute, gain |
| Indicators: | LED, OLED display |
| Operating voltage: | 2 x AA battery |
| Operating time: | >8 h (with alkaline batteries) |
| Width: | 115 mm |
| Height: | 54 mm |
| Depth: | 135 mm |
| Weight: | 0,72 kg |




NOISE GATE WITH AUTOMATIC AND MANUAL THRESHOLD SETTING

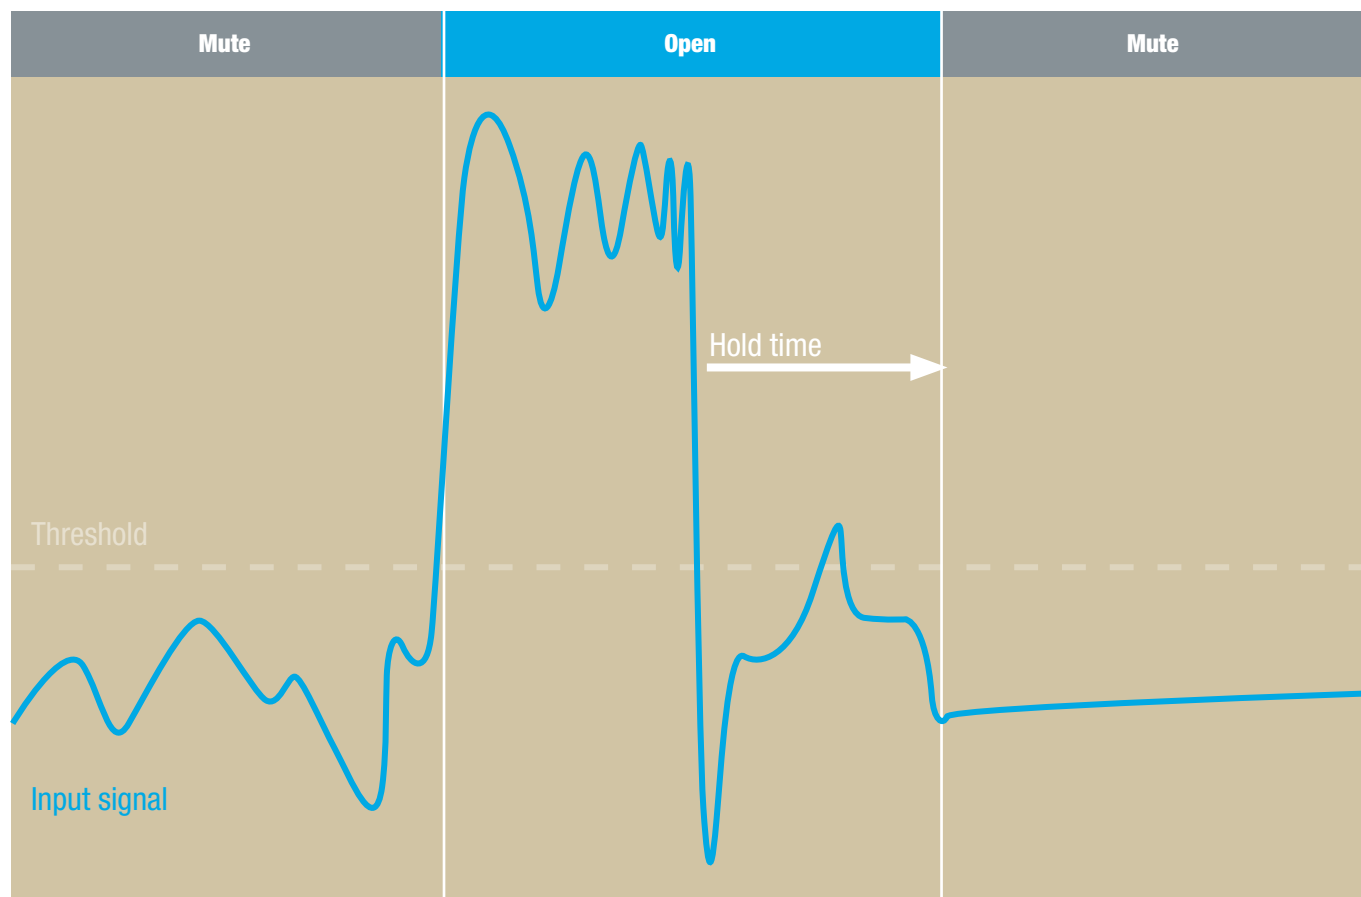

The U500 receiver's noise gate provides a choice of **AUTOMATIC** or **MANUAL** modes of threshold and hold time setting. The gate opens when the input level rises above the threshold to pass speech through. If a microphone unit's signal level falls below the threshold the gate mutes the respective channel to eliminate unwanted noise. Hold time determines how long the noise gate remains open after the input level has dropped below the threshold.

THE NOISE GATE IN OPERATION

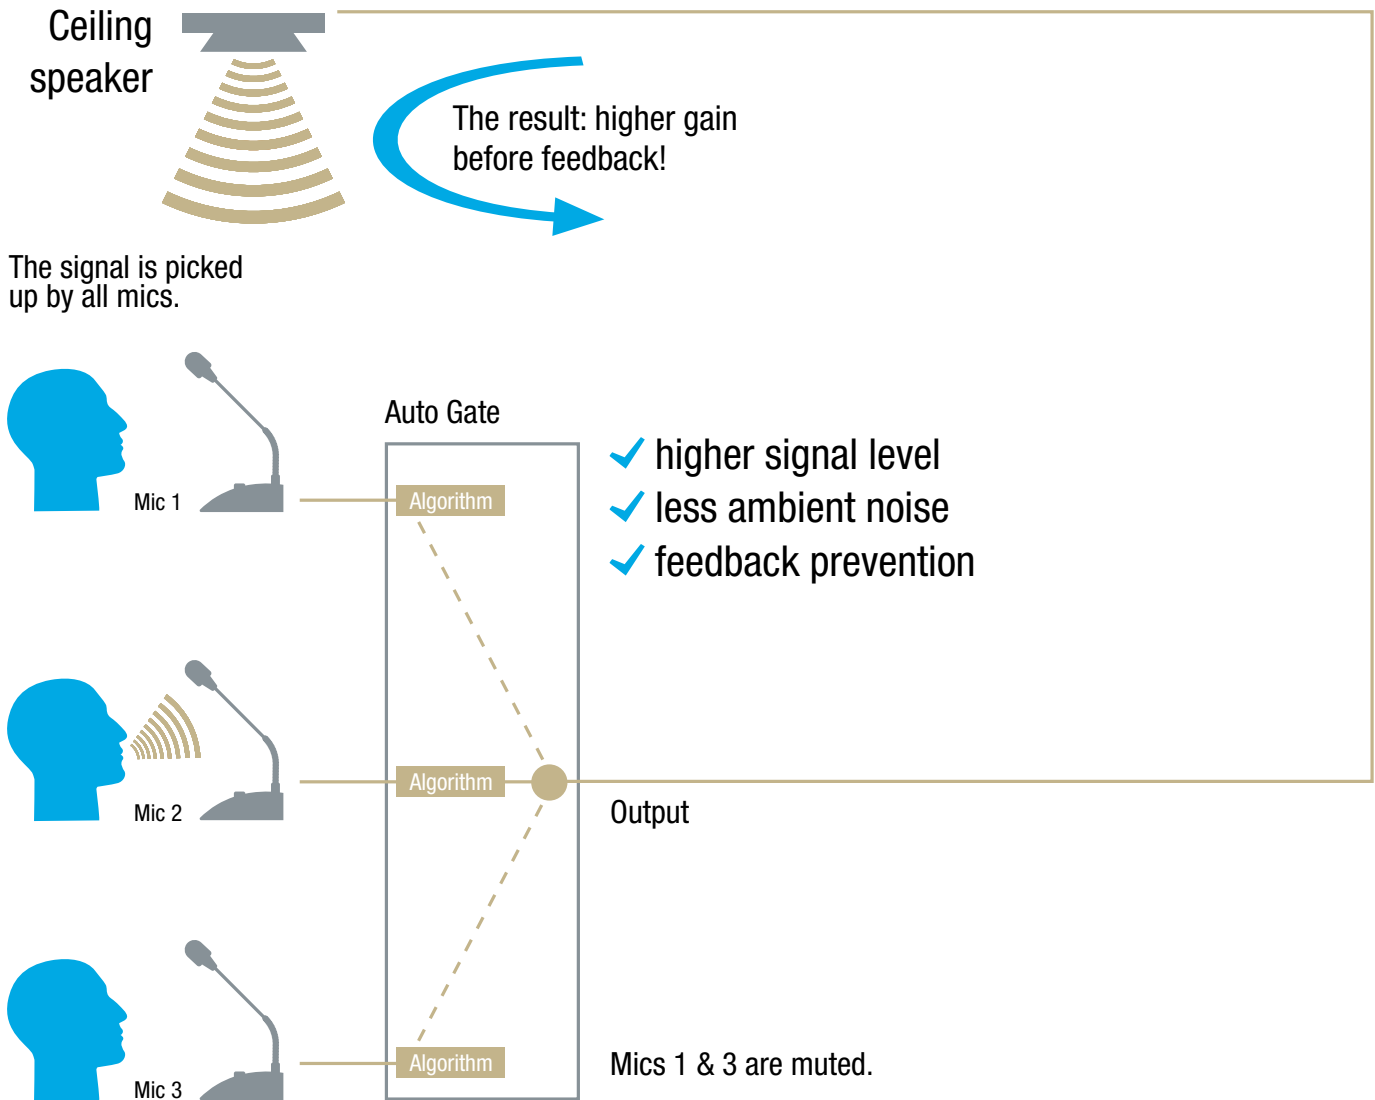



LD
SYSTEMS PRO AUDIO
IN MOTION

U500[®] SERIES
PROFESSIONAL WIRELESS **SYSTEMS**

DESIGNED & ENGINEERED IN GERMANY
WWW.LD-SYSTEMS.COM



www.facebook.com/ldsystems
www.youtube.com/ldsystemsvideos
blog.adamhall.com

LD Systems[®] is a brand of the Adam Hall Group.



The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.