



# LS SERIES

## Assembly Instructions

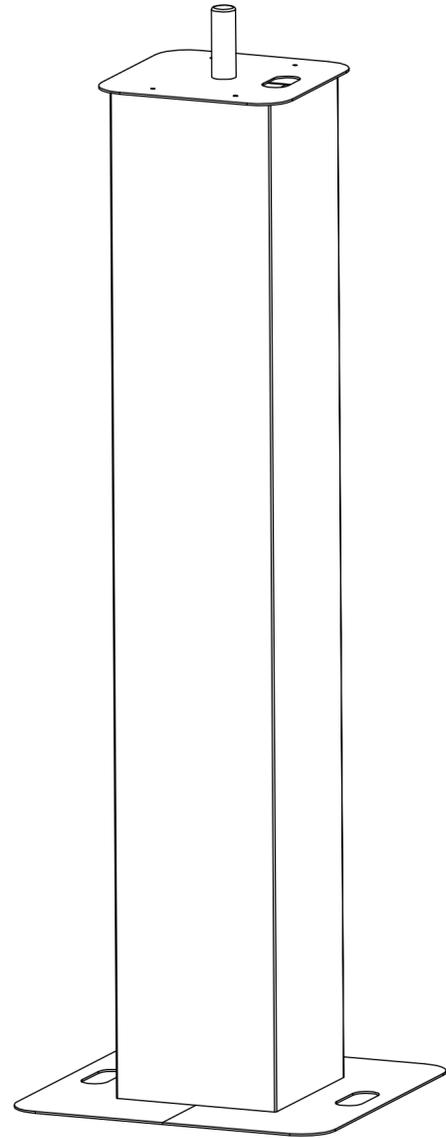


**1**

Lay the base plate flat on the floor. Place the frames on the base, lining up the mounting holes. With the frames in place, position the crossbars across each frame and use the long bolts to secure.

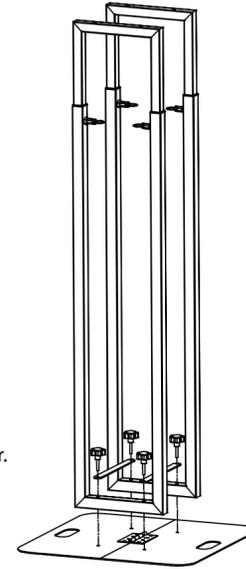


**2**

Repeat the same process to attach the top plate.

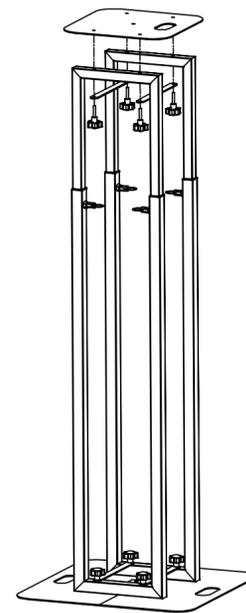


**3**

To adjust the height, unlock the latches by pulling, turning a half turn, and releasing. Once all four latches are unlocked, adjust the height of the stand and return the latches to their locked position. Continue adjusting the height until the latches full lock in place.

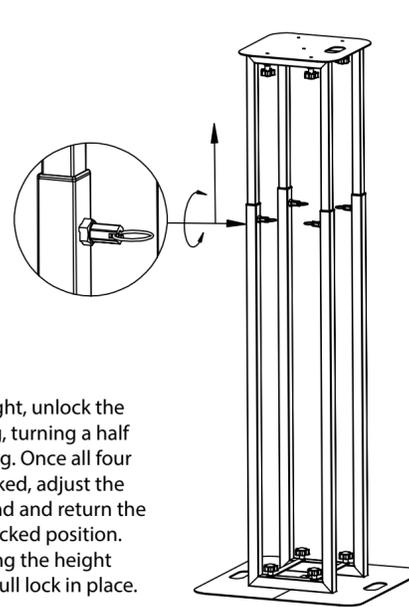

**4**


Pull the scrim over the frames and adjust it until it covers the frames evenly.


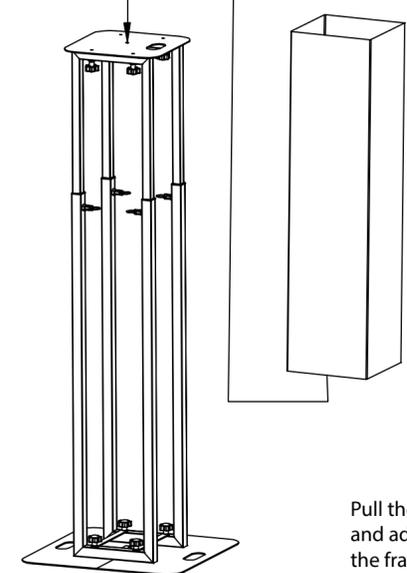


**5**

Optional

The stand includes adhesive non-slip EVA pads for the plate, a speaker mount adapter, and 4 cable management straps to use as needed.

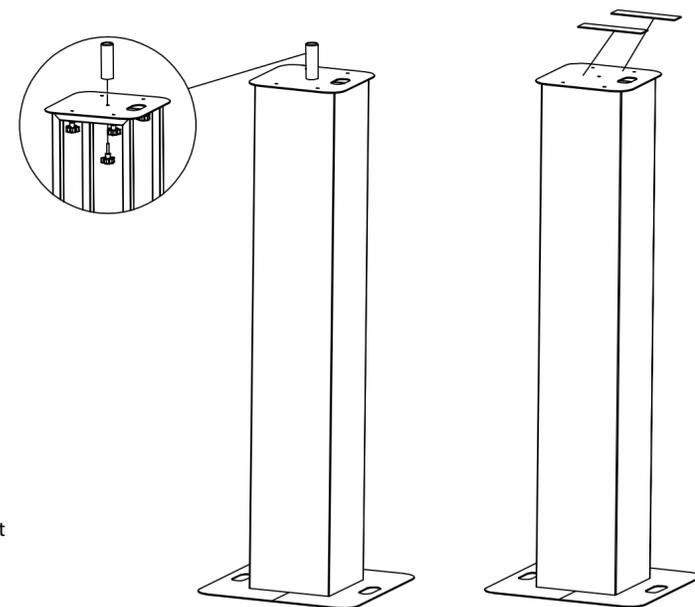

	(4) Long bolts to attach base plate		(1) Short bolt to attach speaker mount
	(4) Standard bolts to attach top plate		(4) Cable straps
	(2) Adhesive non-slip EVA foam pads for top plate		