


WLL
100 kg

MOUNTING BRACKET

USER MANUAL
FOR FIXED INSTALLATION

CONTENT




- 1 4 x M8 nut nyloc black
- 2 1 x Truss bracket
- 3 2 x Grid U-wire bracket M8 black

SCOPE


With this bracket you can hang a 30 truss (square or triangle) onto the ceiling.
The bracket is mounted onto the truss with grid U-wire bracket M8.

Pre-drilled holes provides access to assemble a threaded M10 rod. (not included)

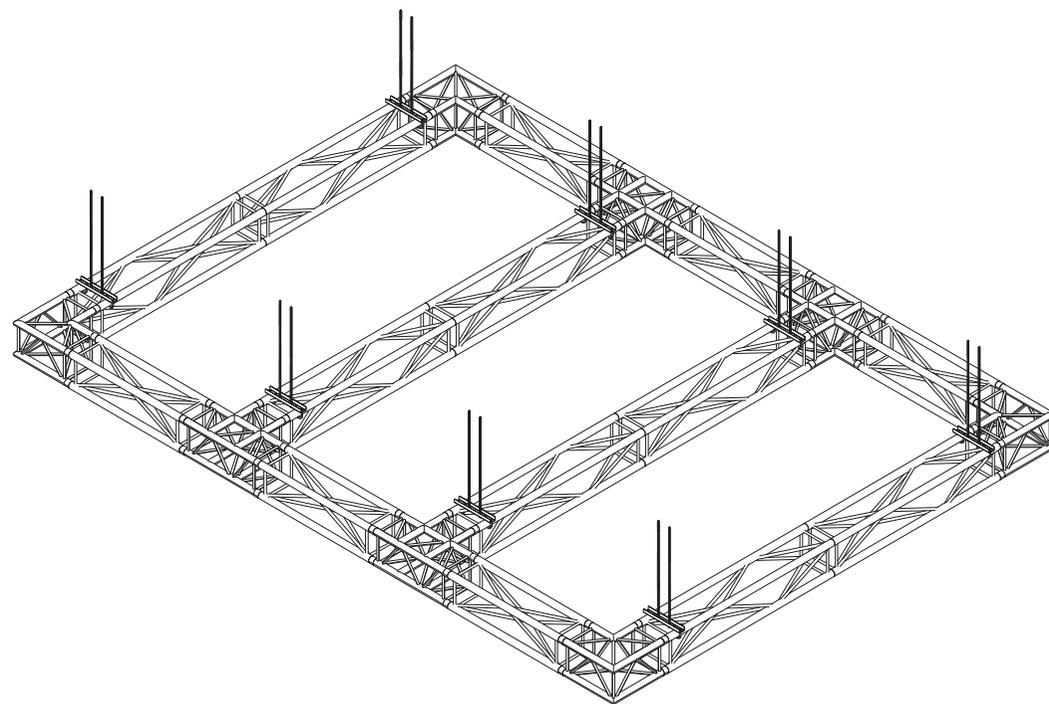

INSTALLATION

Attach the Truss bracket onto the ceiling using M10 threaded rods.

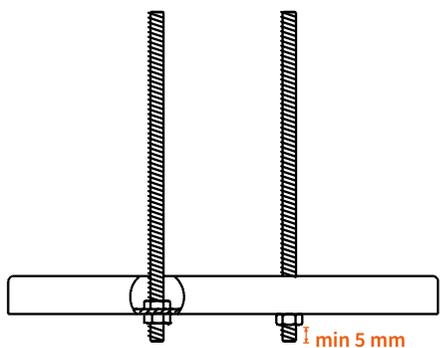


↓ min 5 mm

! WARNING

Always tighten the nyloc nut on the bottom of the Truss bracket in such a way that there is 5mm thread visible below each nut.

Connecting the U-wire bracket by using M8 nyloc nuts.

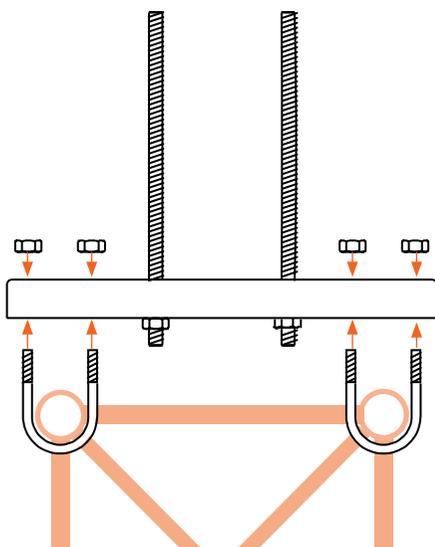

MAINTENANCE

The Truss bracket hardly needs any maintenance under normal use and environmental circumstances. For safety reasons however, all parts must be checked regularly for dirt, damages, loss and corrosion.

- Check the components regularly for corrosion: corrosion can negatively affect the strength
- Use nyloc nuts only once. After use replace them by equivalent ones.
- If necessary, clean with a dry cloth. Do not use corrosive detergents.

! WARNING

Inspect this product before use.

Check all components for damage and corrosion. Damaged and corroded parts shall be rejected and taken out of service. In case of doubt contact Admiral Staging.

The Truss bracket shall be checked in compliance with the local law by a competent person. Checking shall take place as often as required but with a minimum of 1 x per year. In case of doubt contact Admiral Staging.