

BRANDS THAT INSPIRE




Welcome to our product catalogue

There was a time, most recently, where the sound of silence seemed to be all around us and in which the lights were extinguished. It surprised, sedated and restricted us in an unprecedented way. Two things couldn't be stopped, our spirit and the power of innovation.

In addition to the 2021 'Brands that inspire' catalogue, we now have even more to show you! We kept bringing in new and improved fixed and mobile solutions for all walks of life. Solutions for either your businesses, public places and events. It is now time for you to flourish, whether you are a rental company, reseller, installer, event organiser or any other business owner. Be prepared, because the moment is now. The tidal wave of joy is here.

Check out this 2022 update to find out our latest innovations. Together with the brands that inspire catalogue, you will now have a complete overview of our portfolio.

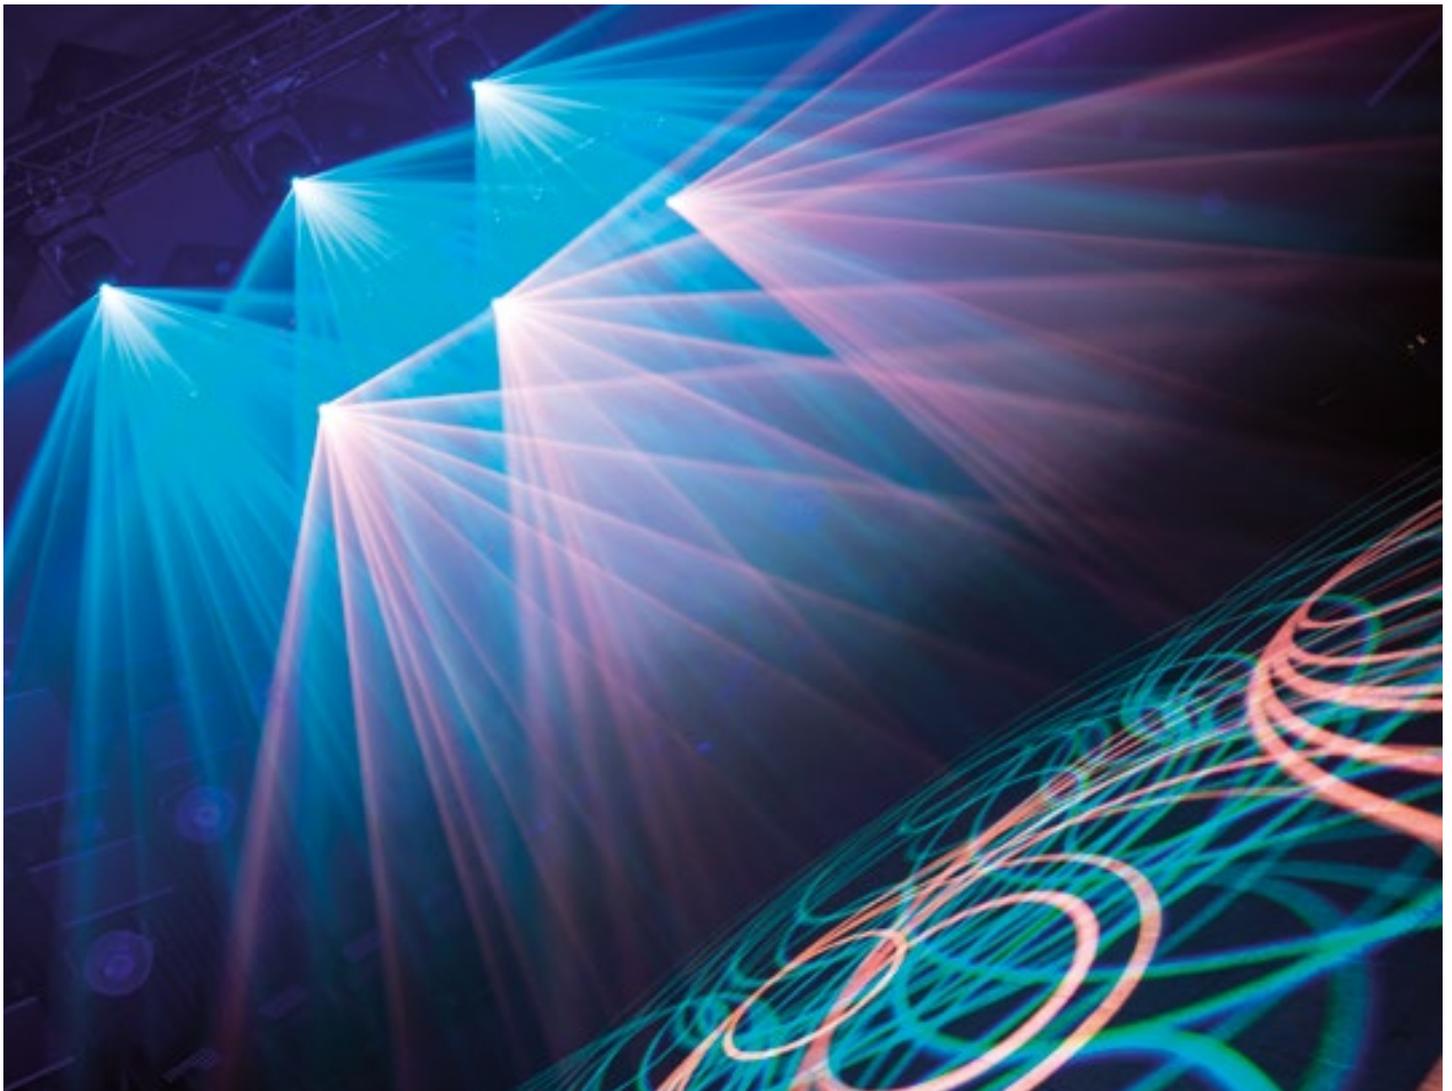

Audiovisual

Led Screens

- Pixel Screens
- LED Screen Rigging & Mounting

AV Controllers

- Video Processors
- AV Interfaces
- Fiber Optic Cables & Converters



Audio

Speakers

- Portable Sound Systems
- Speaker Covers

Audio Players

- CD & Mediaplayers

Public Addressing

- Amplifiers

Microphones

- Vocal Microphones
- Wireless Systems

Audio Stands

- Speaker Stands
- Accessories for Speaker Stands



Entertainment Lighting

Theatre Lights

- Fresnels
- Profiles
- Flood & Cyclorama Lights
- House Lights
- Theatre Lights Accessories

Wall Washers

- Washers Outdoor

Spots

- Spots Indoor

Battery Lights

- Battery Shapes
- Battery Spots
- Battery Spots Accessories

Light Effects


- Effect Lights
- Lasers

Deco Lights

- LED Flexlights

Light Bulbs

- Light Bulbs



Architectural Light

LED Strips

- Profiles

Garden & Street lights

- 240 V

Arctea Accessories

- Controllers

Special Effects

FX Hardware

- Foggers
- Fazers
- Snow Machines

FX Accessories

- FX Hardware Accessories
- Remotes

Cables & Connectors

Prefab Cables

- Combined Power & Light Signal Cables
- AV Cables

Cables on Spool

- Speaker Cables

Power Distribution

- 240 V Extension Cords
- 240 V Socket Boxes

Stage & Rigging

Stage Accessories

- Stages
- Crowd Control

Truss

- Truss Furniture

Rigging

- Rigging Accessories

Textiles

- Pipe & Drape
- Eurotrack
- Deco Textiles






Light Stands

- Stand Accessories

Bags & Cases

Bags

- Gear Bags





Meet the brands

Brands that inspire



Showtec accommodates over a thousand products, ranging from static, moving, and special effect lighting to theatre spots and DMX controllers. Rental companies, DJs, and professionals in the entertainment industry turn to Showtec for reliable products with a high quality-price ratio. Wherever you are in the entertainment industry, you will find a solution that fits your experience, your budget, and the visual experience you want to create. Whether you are at a festival, in a club, a theatre, or even in a video production, you can rely on Showtec in any situation.

Our latest Showtec showpieces are our Lampy DMX lighting controllers. They offer strong features and a very user-friendly and intuitive interface that makes shows easy, fast, and fun to design and control.

We have also introduced several new Showtec fixtures, for instance the Phantom 250 Spot and Phantom Hybrid 12R. They are a terrific addition to our Phantom series and will most definitely fit well in your inventory.



Infinity offers meticulously designed and crafted products, ranging from moving and static theatre and studio lighting to complete smart control solutions. Professionals in the entertainment industry use Infinity for excellent and exclusive lighting solutions. Infinity offers innovative tools to translate creativity and passion in situations where only no-compromise lighting devices are accepted.


An excellent example is the Chimp product range, which keeps evolving, with new opportunities and possibilities each year. We have improved and expanded these professional DMX consoles and products with new software and additional hardware. You can now prepare your shows from anywhere with the lightweight and USB-powered Side-Kick and the Chimp OnPC software, add the Banana Wing to your Chimp setup to expand the number of fader and button controls, and add the Peanut Box for four additional universes on your Chimp product and time-code control to your shows. For enabling two additional DMX universes, Art-Net, and sACN on your Chimp OnPC software, a USB dongle is now available.



DAP accommodates over a thousand products, ranging from microphones and speakers to cables and audio mixers.

Performing artists, sound professionals, and installers choose DAP to have affordable and solid audio solutions at their disposal. DAP provides versatile remote and fixed solutions for both large and small events, public addressing, and background music.

Especially for medium to large shows and events, Odin Audio Systems by DAP is a truly versatile line-array audio system that perfectly replicates the punchy sound of a kick, the finest details of a guitar, and true vocal expressions. Next to powerful and detailed sound, Odin offers loads of character, excellent features, and scalability at an unprecedented price level.



DAP

ARTECTA

SHOW
GEAR

DAP accommodates over a thousand products, ranging from microphones and speakers to cables and audio mixers.

Performing artists, sound professionals, and installers choose DAP to have affordable and solid audio solutions at their disposal. DAP provides versatile remote and fixed solutions for both large and small events, public addressing, and background music.



Especially for medium to large shows and events, Odin Audio Systems by DAP is a truly versatile line-array audio system that perfectly replicates the punchy sound of a kick, the finest details of a guitar, and true vocal expressions. Next to powerful and detailed sound, Odin offers loads of character, excellent features, and scalability at an unprecedented price level.

Arctecta focusses on providing complete solutions for controllable mood and track lighting, architectural lights, down lights, office lights, and LED strips. AV installers use Arctecta for providing high-quality and modern architectural solutions and accessories for design lighting in projects of any size, for example retail environments and the hospitality industry.

With the arrival of the Display Series, track lighting becomes more versatile, with 3-phase profiles and fresnels for professional indoor display applications. We have also expanded our LED strip assortment significantly with the Havana LED strips with dedicated profiles and more.

Showgear carries all essentials from DAP, Showtec, and DMT that are not dedicated to one specific product. Accumulating these under one brand, results in better segmentation and brand targeting. In addition, we have added new products like network cabinets and wall/ceiling mounts to the Showgear portfolio.

From rigging equipment and power distribution to flight cases and backdrops, Showgear delivers all the support products you might need and more. So, for all those who work tirelessly behind the scenes of productions and shows, you will find all your essential supplies and accessories under the Showgear brand.

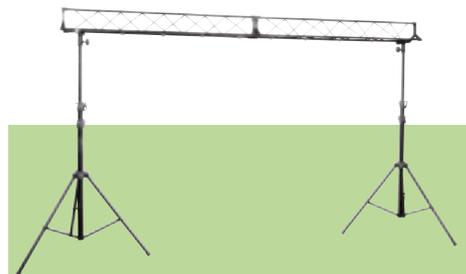



Premiere Series PS3.9 Blue Line

101771 50 x 100 cm

DMT

Specifications:

Pixel Pitch Hor.: 3.91 mm
 Pixel Pitch Vert.: 3.91 mm
 Cabinet Resolution Width: 128 px
 Cabinet Resolution Height: 256 px
 Viewing Angle Hor.: 160 °
 Viewing Angle Vert.: 155 °
 Transparency: 0 %
 LED Type: Black Frame
 Brightness: 5000 nits
 Control System: Novastar
 Refresh Rate Screen: 3840 Hz
 Power Supply: 100-240 VAC
 50-60 Hz

Power Consumption: 300 W
 Power Consumption Avg.: 140 W
 Power Connector in: Power Pro True
 Power Connector out: Power Pro True
 Data Connector in: ProCat
 Data Connector out: ProCat
 Cabinet Width: 500 mm
 Cabinet Height: 1000 mm
 Cabinet Depth: 66 mm
 Weight: 13 kg
 IP Rating: IP54 Rear / IP65 Front
 Maintenance: Front / Rear Service
 Rigging Vert. Max.: 18 Panels
 Locking System: Fast Lock System

FEATURES:

- 3.9 mm Pixel pitch with up to 5000 Nits
- Front and rear service
- Lightweight
- NovaStar A5s PLUS receiver card
- IP65 (front), IP54 (rear), suitable for temporary outdoor installations



Premiere Series PS3.9 Blue Line

101770 50 x 50 cm

DMT

Specifications:

Pitch Hor.: 3.91 mm
 Pitch Vert.: 3.91 mm
 Cab. Res. Width: 128 px
 Cab. Res. Height: 128 px
 Horz. View °: 160 °
 Vert. View °: 155 °
 Transparency: 0 %
 LED Type: Black Frame
 Brightness: 5000 nits
 Ctrl System: Novastar
 Refresh Rate: 3840 Hz
 Pwr. Supp.: 100-240 VAC
 50-60 Hz

Pwr. Cons.: 150 W
 Pwr. Cons. Average: 50 W
 Pwr. Conn. In.: Power Pro True
 Pwr. Conn. Out.: Power Pro True
 Data Conn. In: ProCat
 Data Conn. Out: ProCat
 Cab. Width: 500 mm
 Cab. Height: 500 mm
 Cab. Depth: 66 mm
 Weight: 8.5 kg
 IP Rate: IP54 Rear / IP65 Front
 Maintenance: Front / Rear Service
 Rigging Vert. Max.: 18 Panels
 Locking System: Fast Lock System

FEATURES:

- 3.9 mm Pixel pitch with up to 5000 Nits
- Front and rear service
- Lightweight
- NovaStar A5s PLUS receiver card
- IP65 (front), IP54 (rear), suitable for temporary outdoor installations



Alpha Series A3.9i**101810** 50 x 50 cm


DMT

Specifications:

Pixel Pitch Hor.:	3.91 mm	Power Consumption Avg.:	50 W
Pixel Pitch Vert.:	3.91 mm	Power Connector in:	Power Pro Blue
Cabinet Resolution Width:	128 px	Power Connector out:	Power Pro Grey
Cabinet Resolution Height:	128 px	Data Connector in:	ProCat
Viewing Angle Hor.:	160 °	Data Connector out:	ProCat
Viewing Angle Vert.:	160 °	Cabinet Width:	500 mm
Transparency:	0 %	Cabinet Height:	500 mm
LED Type:	Black Frame	Cabinet Depth:	76 mm
Brightness:	1500 nits	Weight:	6 kg
Control System:	Novastar	Curved Angles:	-5 / 0 / 5 / 10 °
Refresh Rate Screen:	3840 Hz	IP Rating:	IP20 (indoor use only)
Power Supply:	100-240 VAC 50-60 Hz	Maintenance:	Front / Rear Service
Power Consumption:	150 W	Rigging Vert. Max.:	18 Panels
		Locking System:	Fast Lock System

**FEATURES:**

- Front and rear service
- Lightweight
- High refresh rate
- NovaStar Control





Rigging Bar for A3.9i

101820 Single

DMT

Specifications:

Length (mm): 497 mm
Width (mm): 70 mm
Height (mm): 100 mm

Weight: 4.8 kg
Safety Factor: 10:1
Rigging Vert. Max.: 18 Panels
Locking System: Fast Lock System

FEATURES:

- Suitable for DMT Alpha series
- Maximum number of panels: 18
- Angled mounting options (-5° to +10°)
- Fast Lock system



Rigging Bar for A3.9i

101821 Double

DMT

Specifications:

Length (mm): 997 mm
Width (mm): 70 mm
Height (mm): 100 mm

Weight: 8.6 kg
Safety Factor: 10:1
Rigging Vert. Max.: 18 Panels
Locking System: Fast Lock System

FEATURES:

- Suitable for DMT Alpha series
- Maximum number of panels: 2x 18
- Angled mounting options (-5° to +10°)
- Fast Lock system



MX40 Pro

101636 New range 4K Video Controller

NOVASTAR


Specifications:

Inputs:		Control System:	Novastar
DP1.2:	1	Max. Loading Capacity:	13,000,000 px
HDMI 2.0:	3	Max. Input Resolution:	4096 x 2160 / 8192 x 1080
12G-SDI:	1	Controlling Mode:	Ethernet
Main Outputs:	20	Greyscale Processing:	22 bit
HDMI 2.0 (loop):	3	Power Supply:	100-240 VAC
12G-SDI (loop):	1	Power Consumption:	50-60 Hz
SFP Slot Type:	10G	Power Connector in:	70 W
SFP Slot Amount:	4	Data Connector in:	IEC
Scaling Function:	No	Data Connector out:	RJ45 / USB
GenLock:	In & Out		etherCON / RJ45



FEATURES:

- 4K/60Hz video controller
- Inputs: 3x HDMI 2.0, 1x DP 1.2, 1x 12G-SDI
- Outputs: 20x Gigabit Ethernet, 4x optical (optional), 3x HDMI 2.0 loop, 1x 12G-SDI loop
- True 12-bit, HDR, wide colour gamut, high frame rate, 3D display technology



VX600

101626 All-In-One Video Processor

NOVASTAR

Specifications:

Inputs:		PIP:	Yes
HDMI 1.3:	2	Layers:	3
DVI Single Link:	1	GenLock:	In & Out
3G-SDI:	1	Max. Loading Capacity:	3,900,000 px
Main Outputs:	6	Max. Input Resolution:	1920 x 1200 / Width and Height can be defined by users
HDMI 1.3 (loop):	1	Controlling Mode:	Ethernet / USB
HDMI (PVW / MVR):	1	Power Supply:	100-240 VAC
DVI Single Link (loop):	1	Power Consumption:	50-60 Hz
3G-SDI (loop):	1	Power Connector in:	28 W
SFP Slot Type:	10G	Data Connector in:	IEC
SFP Slot Amount:	2	Data Connector out:	RJ45 / USB
Scaling Function:	Yes		RJ45 / USB
Image Mosaic:	Yes		



FEATURES:

- Internal scaling function
- Inputs: 1x 3G-SDI, 1x DVI, 2x HDMI 1.3
- Outputs: 1x HDMI 1.3, 6x Ethernet, 2x optical (optional)
- Supports Image Mosaic
- Supports 2x PIP





Taurus T-30

101590 Cloud based media player & sender card for LED screen

NOVASTAR

Specifications:

Light Sensor Port:	1	Control System:	Novastar
Temperature Sensor Port:	1	Max. Loading Capacity:	650,000 px
Internal Media Player:	Yes	Controlling Mode:	4G mobile network / Ethernet / Wi-Fi
Processor:	1.8 GHz – Quad - core	Power Supply:	5 VDC
Operating Memory:	1 GB	Power Consumption:	18 W
Internal Storage Space:	16 GB	Power Connector in:	Terminal
Local Content Upload:	Ethernet / USB	Data Connector in:	RJ45 / USB
Scaling Function:	Yes	Data Connector out:	RJ45

FEATURES:

- All-in-one solution: media player and sending card with scaling function
- Suitable for small LED screens up to 650,000 pixels
- PCB version (no housing)
- Connect via Ethernet, Wi-Fi or 4G
- Upload new content and change screen settings remotely via Mobile/PC



Taurus T-50

101591 Cloud based media player & sender card for LED screen


NOVASTAR

Specifications:

HDMI 1.4a:	1	Scaling Function:	Yes
Light Sensor Port:	1	Control System:	Novastar
Temperature Sensor Port:	1	Max. Loading Capacity:	1,300,000 px
HDMI 1.4a (loop):	1	Max. Input Resolution:	1920 x 1080
Internal Media Player:	Yes	Controlling Mode:	4G mobile network / Ethernet / Wi-Fi
Processor:	1.8 GHz – Quad - core	Power Supply:	5 VDC
Operating Memory:	1 GB	Power Consumption:	18 W
Internal Storage Space:	16 GB	Power Connector in:	Terminal
Local Content Upload:	Ethernet / USB	Data Connector in:	RJ45 / USB
		Data Connector out:	RJ45

FEATURES:

- All-in-one solution: media player and sending card with scaling function
- Suitable for small to medium LED screens up to 1,300,000 pixels
- PCB version (no housing)



Taurus TB-30

101592 Cloud based media player & sender box for LED screen

NOVASTAR

Specifications:		Ctrl System:	Novastar
Light Sens. Prt.:	1	Max. Load. Cap.:	650,000 px
Temp. Sens. Prt.:	1	Controlling Mode:	4G mobile network / Ethernet / Wi-Fi
Int. Media player:	Yes	Pwr. Supp.:	100-240 VAC
Processor:	1.8 GHz – Quad - core		50-60 Hz
Memory:	1 GB	Pwr. Cons.:	18 W
Int. Storage:	16 GB	Pwr. Conn. In.:	IEC
Local Content Upload:	Ethernet / USB	Data Conn. In.:	RJ45 / USB
Scale funct.:	Yes	Data Conn. Out:	RJ45

FEATURES:

- All-in-one solution: media player and sending card with scaling function
- Suitable for small LED screens up to 650,000 pixels
- Metal housing
- Connect via Ethernet, Wi-Fi or 4G



Taurus TB-50


101593 Cloud based media player & sender box for LED screen

NOVASTAR

Specifications:		Control System:	Novastar
HDMI 1.4a:	1	Max. Loading Capacity:	1,300,000 px
Light Sensor Port:	1	Max. Input Resolution:	1920 x 1080
Temperature Sensor Port:	1	Controlling Mode:	4G mobile network / Ethernet / Wi-Fi
HDMI 1.4a (loop):	1	Power Supply:	100-240 VAC
Internal Media Player:	Yes		50-60 Hz
Processor:	1.8 GHz – Quad - core	Power Consumption:	18 W
Operating Memory:	1 GB	Power Connector in:	IEC
Internal Storage Space:	16 GB	Data Connector in:	RJ45 / USB
Local Content Upload:	Ethernet / USB	Data Connector out:	RJ45
Scaling Function:	Yes		

FEATURES:

- All-in-one solution: media player and sending card with scaling function
- Control up to 1,300,000 pixels
- Metal housing
- Connect via Ethernet, Wi-Fi or 4G



Taurus TB-60

101594 Cloud based media player & sender box for LED screen

NOVASTAR

Specifications:		Max. Loading Capacity:	2,300,000 px
HDMI 1.4a:	1	Max. Input Resolution:	1920 x 1080
Light Sensor Port:	1	Controlling Mode:	4G mobile network / Ethernet / Wi-Fi
Temperature Sensor Port:	1	Power Supply:	100-240 VAC
HDMI 1.4a (loop):	1		50-60 Hz
Internal Media Player:	Yes	Power Consumption:	18 W
Processor:	1.8 GHz – Quad - core	Power Connector in:	IEC
Operating Memory:	1 GB	Data Connector in:	RJ45 / USB
Internal Storage Space:	16 GB	Data Connector out:	RJ45
Local Content Upload:	Ethernet / USB		
Scaling Function:	Yes		

FEATURES:

- All-in-one solution: media player and sending card with scaling function
- Suitable for medium to large LED screens up to 2,300,000 pixels
- Connect via Ethernet, Wi-Fi or 4G





VT202 - KVM HDMI / USB Fibre Extender Set

101242 Long-distance fibre optic USB & HDMI Signal Solution

DMT

Specifications:		Power Supply:	100-240 VAC 50-60 Hz
USB 1.1 (in):	1	Power Consumption:	3.2 W
HDMI1.4b:	1	Power Connector in:	Low Voltage DC plug
USB 1.1 (out):	2	Data Connector in:	HDMI / USB B
HDMI 1.4b (out):	1	Data Connector out:	HDMI / USB A
Max. Input Resolution:	3840 x 2160		
Max. Output Resolution:	3840 x 2160		

FEATURES:

- USB & HDMI KVM fibre extender set
- Large distance signal transmission up to 300 m
- Resolution up to 3840 x 2160P @ 30 Hz
- USB 1.1
- 2x Multimode SFP/LC modules included



CVT10-S

101654 10x gigabit ethernet to fibre converter

NOVASTAR

Specifications:		Max. Transmission Distance: 10,000 m
		Power Supply: 100-240 VAC
Main Outputs:	10	50-60 Hz
SFP Slot Type:	10G	Power Consumption: 22 W
SFP Slot Amount:	2 SFP Module	Power Connector in: IEC / powerCON
Fibre Connector Type:	LC	TRUE1
SFP Module(s) Included:	Yes	Data Connector in: USB
Fibre Mode:	Single-mode	Data Connector out: RJ45

FEATURES:

- 2x 10G optical output (main + backup)
- 10x 1G ethernet port
- 19" / 1U design
- Transmission distance up to 10 km
- Single-mode



CVT10-M


101655 10x gigabit ethernet to fibre converter

NOVASTAR

Specifications:		Power Supply: 100-240 VAC
		50-60 Hz
Main Outputs:	10	Power Consumption: 22 W
SFP Slot Type:	10G	Power Connector in: IEC / powerCON
SFP Slot Amount:	2 SFP Module	TRUE1
Fibre Connector Type:	LC	Data Connector in: USB
SFP Module(s) Included:	Yes	Data Connector out: RJ45
Fibre Mode:	Multi-mode	
Max. Transmission Distance:	300 m	

FEATURES:

- 2x 10G optical output (main + backup)
- 10x 1G ethernet port
- 19" / 1U design
- Transmission distance up to 300 m
- Multi-mode



Portable Sound Systems Speakers



PSS-106 Battery Speaker

D2612 6.5" Battery Speaker, without Microphone

D2613 6.5" Battery Speaker, incl. Wireless Handheld Microphone

DAP

Specifications:		Ch. Input Fixed Freq.:	100, 10.000 Hz
Low Driver Power:	90 W	Built-in FX:	Yes
High Driver Power:	10 W	FX Types:	Reverb
RMS Output Power Amp.:	100 W	Wireless Mic. Freq. Start:	863 MHz
Peak Output Power Amp.:	160 W	Wireless Mic. Freq. End:	865 MHz
Mono Inputs:	2	Bluetooth Audio Profile:	A2DP
Mono Input Connector:	3-pin XLR / TS unbalanced 6.3 mm	Battery Type:	Lithium ion
Auxiliary Inputs:	1	Runtime @Full:	5 h
Auxiliary Input Connector:	TRS balanced 3.5 mm	Charging Time:	5 h
Supported Audio Files:	MP3	Power Supply:	220V-240 VAC 50 Hz
Media Input/Output:	USB-A / SD Card	Power Consumption:	100 W
Amp Technology:	Class D	Power Connector in:	IEC
Max. SPL at 1 m:	110 dB	Height (mm):	323 mm
Freq. Resp. Min.:	70 Hz	Width (mm):	240 mm
Freq. Resp. Max.:	20000 Hz	Length (mm):	265 mm
Woofer Ø:	6.5"	Weight:	5.9 kg
Compression Driver Ø:	1" Parametric	IP Rating:	IP20 (indoor use only)
Channel Equalizer:	2 Bands Input Channel	VOX:	Yes
Equalizer Range:	10 dB	Castors:	None

FEATURES:

- 100 W full-range battery speaker with Bluetooth and MP3 function
- Lightweight Class-D amplifier
- Can be used as floor monitor, tilt back, or PA system
- 5 hours charging time and 5 hour battery life @ maximum output
- Built-in 2-Ch amplifier with Bluetooth, USB, (mini)jack and XLR input



Speaker Covers Speakers



Transport Cover for PSS-106

D2614

DAP

Specifications:

Weight:	0.75 kg
Fabric:	Cordura

FEATURES:

- Durable, water-resistant Cordura fabric
- Storage compartment with velcro closing
- Dedicated for DAP PSS-106



BP-10 Beltpack transmitter for PSS-106 DAP

D2622 863–865 MHz - including headset



See Page 19

WR-10 Wireless receiver for PSS-106 DAP

D2625 Suitable for BP-10 and WM-10



WM-10 Handheld Microphone for PSS-106 DAP

D2621 ON/OFF switch



MP-100BT Professional Media Player with DAB+

D1246 1U Media Player with DAB+, FM Radio, USB/MP3 player, and Bluetooth DAP

Specifications:		DAB+ Freq. Start:	174.928 Mhz
Stereo Inputs:	4	DAB+ Freq. End:	239.2 Mhz
Auxiliary Inputs:	1	Power Supply:	220V-240 VAC 50 Hz
Main Outputs:	1	Power Consumption:	96 W
Supported Audio Files:	MP3	Height (mm):	44 mm
Max. Storage Size:	32 GB	Width (mm):	483 mm
Media Input/Output:	USB-A	Length (mm):	104 mm
Signal-to-noise Ratio:	> 70 dB	Rack Units:	1 U
FM Freq. Start:	87 MHz	Weight:	1.5 kg
FM Freq. End:	108 MHz		



FEATURES:

- 1U 19" rack media player
- Supports DAB+, FM Radio, USB/MP3, Bluetooth 4.2
- 3.5-mm jack, XLR/combi mic, USB-A, and 4x RCA inputs
- Suitable for stores, cafés, restaurants, sports canteens, et cetera
- IR remote included



MP-220BT Media Player with Bluetooth

D1245 1U Dual Media Player with FM radio, USB/SD card player, Bluetooth 4.2, and paging mic interface

Specifications:		FM Freq. End:	108 MHz
Stereo Inputs:	2	Power Supply:	220V-240 VAC 50 Hz
Auxiliary Inputs:	1	Power Consumption:	96 W
Main Outputs:	2	Height (mm):	44 mm
Supported Audio Files:	MP3	Width (mm):	483 mm
Max. Storage Size:	32 GB	Length (mm):	104 mm
Media Input/Output:	USB-A / SD Card	Rack Units:	1 U
FM Freq. Start:	87.5 MHz	Weight:	1.8 kg



FEATURES:

- 1U 19" rack dual media player with independent controls
- Supports FM Radio, USB/SD card, Bluetooth 4.2, and paging mic
- 3.5-mm jack, paging mic, USB-A, SD card slot, and 2x RCA inputs
- Suitable for stores, cafés, restaurants, sports canteens, et cetera
- IR remote and paging mic interface included



GCM-10

DAP

D1385 Gooseneck Condenser Microphone

See Page 19



IR-150BT Media Player

D1247 1U mixer with Wi-Fi radio (DAB+) and wireless audio (Bluetooth connection)

DAP

Specifications:		FM Freq. Start:	87 MHz
Main Outputs:	1	FM Freq. End:	108 MHz
Supported Audio Files:	AAC/AAC+ / FLAC / MP3	DAB+ Freq. Start:	174.928 Mhz
THD Level:	< 0.1%	DAB+ Freq. End:	239.2 Mhz
Signal-to-noise Ratio:	> 70 dB	Power Supply:	220V-240 VAC 50 Hz
Carrier Freq.:	2,4 GHz	Power Consumption:	4.6 W
Bluetooth Version:	4.2	Height (mm):	44 mm
Bluetooth Range:	20 m	Width (mm):	483 mm
		Length (mm):	270 mm
		Rack Units:	1 U
		Weight:	1.8 kg



FEATURES:

- 1U 19" Rack media player
- Supports DAB+, FM radio and Bluetooth 4.2
- Suitable for stores, cafés, restaurants, sports canteens, et cetera
- 2.4" TFT display
- RCA input
- XLR microphone input (no phantom power)
- IR remote included



Amplifiers Public Addressing

PA-5500TU

D6175 500 W / 100 V Amp with DAB+, FM, BT 4.2, and network audio player

DAP


Specifications:		Freq. Resp. Max.:	20000 Hz
RMS Output Power Amplifier:	460 W	Parametric Main Equalizer:	2 Bands
Output per Chan. into 8 ohms at 1 kHz:	240 W	FM Freq. Start:	87 MHz
Output Channels:	2	FM Freq. End:	108 MHz
Output Mode:	Bridge / Stereo	DAB+ Freq. Start:	174.928 Mhz
Output Connector:	Terminal	DAB+ Freq. End:	239.2 Mhz
Stereo Inputs:	4	Power Supply:	220V-240 VAC 50 Hz
Stereo Input Connector:	RCA	Power Consumption:	96 W
Transformer:	100 V	Power Connector in:	IEC
Supported Audio Files:	AAC/AAC+ / FLAC / MP3	Height (mm):	44 mm
THD Level:	< 0.1%	Width (mm):	483 mm
Signal-to-noise Ratio:	> 100 dB	Length (mm):	330 mm
Amp Technology:	Class D	Rack Units:	1 U
Freq. Resp. Min.:	20 Hz	Weight:	3.2 kg
		Electronic Protection:	Overload / Short circuit



FEATURES:

- 1U 19" media player
- Supports DAB+, FM radio, AUX in/out and Bluetooth 4.2
- Suitable for public places, like fitness centers and shops
- 2.4" TFT display
- 3.5 mm jack and 4x RCA (tulp) input
- XLR microphone input (no phantom power)
- IR remote included



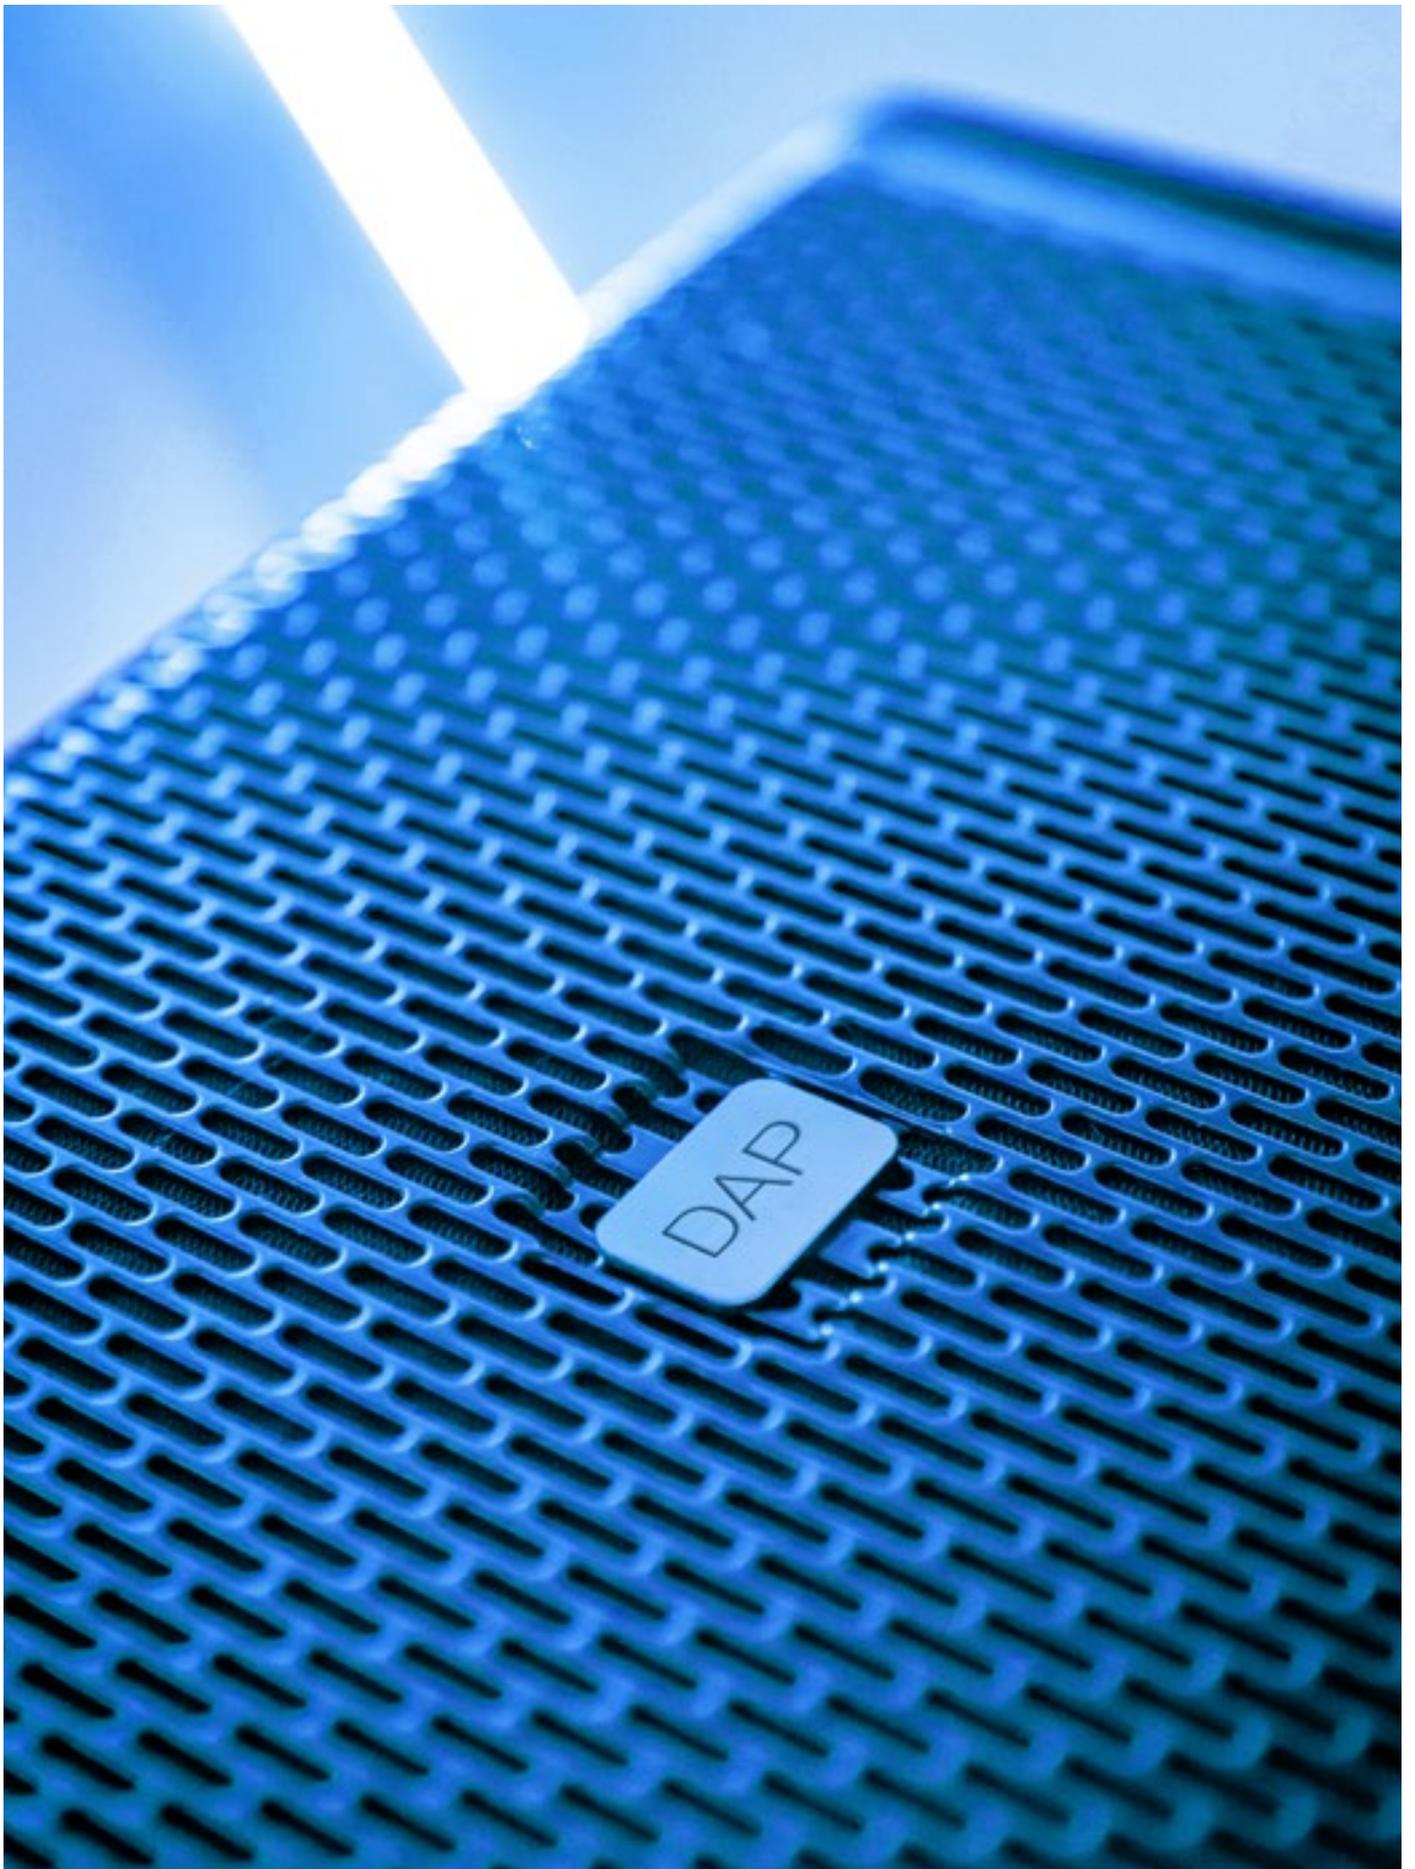

GCM-10

D1385 Gooseneck Condenser Microphone

DAP

Specifications:		Freq. Resp. Min.:	50 Hz
		Freq. Resp. Max.:	20000 Hz
		Phantom Power:	9 V / 12 V / 18 V / 24 V / 48 V
Microphone		Height (mm):	480 mm
Output Connection:	3-pin XLR	Width (mm):	14 mm
Microphone Impedance:	180 Ω	Length (mm):	14 mm
Microphone Type:	Condenser	Weight:	0.12 kg
Microphone Sensitivity:	18 mV		
Polar Pattern:	Omni Directional		
Max. SPL:	122 dB		



FEATURES:

- Omni-directional
- Low-noise
- Highly sensitive
- Lightweight
- Portable



BP-10 Beltpack transmitter for PSS-106

D2622 863–865 MHz - including headset

DAP

Specifications:	
Freq. Resp. Min.:	863 Hz
Freq. Resp. Max.:	865 Hz
Battery Type:	AA

FEATURES:

- Beltpack sender dedicated for DAP PSS-106
- Suitable for (condenser) microphone and instrument
- Frequency range: 863–865 MHz
- Phantom power supply
- Headset included





Table Monitor Z-Stand

E200001 Two studio monitor speaker table stands - black

SHOWGEAR

Specifications:

Height:	263 mm	Weight:	2.72 kg
Material:	Steel	Max. Load:	15 kg
		Folded Max. Length:	210 mm

FEATURES:

- For speakers up to 15x18 cm (5.9"x7.1") (WxD)
- Total height: 26.3 cm (10.4")
- Rubber pads for firm grip and cancels contact noise
- Maximum WLL: 15 kg



Table Monitor Stand

E200002 Small studio monitor speaker table stand - black

SHOWGEAR

Specifications:

Min. Height (mm):	156 mm	Weight:	2.75 kg
Max. Height (mm):	258 mm	Max. Load:	15 kg
Material:	Steel	Locking Type:	Screw Knob
		Folded Max. Length:	215 mm

FEATURES:

- For speakers up to 15x17 cm (5.9"x6.7")(WxD)
- Seamless adjustable height up to 25.8 cm (10.2")
- Rubber pads for firm grip and cancels contact noise
- Rotary knob for firm vibration-free locking
- Maximum WLL: 15 kg



Table Monitor Stand

E200003 Large studio monitor speaker table stand - black

SHOWGEAR

Specifications:

Min. Height (mm):	156 mm	Weight:	4.26 kg
Max. Height (mm):	258 mm	Max. Load:	15 kg
Material:	Steel	Locking Type:	Screw Knob
		Folded Max. Length:	295 mm

FEATURES:

- For speakers up to 23x25 cm (9"x9.8")(WxD)
- Seamless adjustable height up to 25.8 cm (10.2")
- Rubber pads for firm grip and cancels contact noise
- Rotary knob for firm vibration-free locking
- Maximum WLL: 15 kg



M10 Stand Mount Adapter

D8609 for Speaker Stands - black


SHOWGEAR

Specifications:

Height (mm):	133 mm
Width (mm):	95 mm
Length (mm):	45 mm
Material:	Metal / PVC

FEATURES:

- M10 bolt
- Suitable for speaker stands



Fresnels Theatre Lights



ACT Fresnel 150 WW

34012 Compact 150 W Warm White Theatre LED Fresnel

SHOWTEC

Specifications:		Protocols:	DMX / RDM
Light Source Type:	LED	Power Supply:	220V-240 VAC 50 Hz
Light Source Quantity:	1	Power Consumption:	170 W
Light Source Power:	150 W	Power Connector in:	Power Pro Blue
Light Source System:	COB	Power Connector out:	Power Pro Grey
Lumen Total:	8780 lm	DMX Connector:	XLR 3P In/Out
CRI:	96	Length (mm):	415 mm
CCT Max.:	3000 K	Width (mm):	225 mm
Zoom Type:	Manual	Height (mm):	345 mm
Zoom Min.:	14 °	Weight:	4.1 kg
Zoom Max.:	44 °	IP Rating:	IP20 (indoor use only)
Control Mode:	DMX / Manual	Housing:	Aluminium
DMX Channels:	1 / 2	Colour:	Black

FEATURES:

- 150 W WW LED with high CRI for precise colour rendering
- Suitable for theatrical applications, museums, and exhibitions
- Manually adjustable zoom and dimmer
- RDM, DMX, and manual control
- Barndoor included



Profiles Theatre Lights



Performer Profile 700 Q6

33067 300 W RGBALC Theatre & Studio LED Ellipsoidal

SHOWTEC

Specifications:		Protocols:	DMX / RDM
Light Source Type:	LED	Power Supply:	100-240 VAC
Light Source Quantity:	1	Power Consumption:	50-60 Hz
Light Source Power:	300 W	Power Connector in:	300 W
LED Colour Type:	R / G / B / A / C / L	Power Connector out:	Power Pro True
Light Source System:	6in1	DMX Connector:	Power Pro True
Refresh Rate (min):	1200 Hz	Length (mm):	XLR 3P In/Out /
Refresh Rate (max):	25 kHz	Width (mm):	XLR 5P In/Out
Lumen Total:	10276 lm	Height (mm):	685 mm
CRI:	95	Weight:	238 mm
CCT Min.:	1800 K	IP Rating:	499 mm
CCT Max.:	10000 K	Housing:	8 kg
Control Mode:	DMX / Master Slave / Stand Alone	Colour:	IP20 (indoor use only)
DMX Channels:	3 / 7 / 8 / 10 / 13 / 20		Aluminium die-cast
			Black

FEATURES:

- 300 W RGBALC LED array ellipsoidal
- Suitable for theatrical and studio applications
- High CRI for accurate colour rendering
- High refresh rate for flicker-free recordings
- 16-bit dimming with four preset curves



Flood & Cyclorama Lights Theatre Lights



Performer Cyc Q6


33170 Cyclorama Background Wash

SHOWTEC

Specifications:		Power Supply:	100-240 VAC
Light Source Type:	LED	Power Consumption:	50-60Hz
Light Source Quantity:	1	Power Connector in:	180 W
Light Source Power:	180 W	DMX Connector:	Power Pro True
Lumen Total:	7075 lm	Length (mm):	XLR 5P In/Out
CRI:	93	Width (mm):	530 mm
CCT Min.:	1800 K	Height (mm):	170 mm
CCT Max.:	10000 K	Weight:	110 mm
Beam Angle Vert.:	70 °	Housing:	6 kg
Control Mode:	Auto / DMX / Stand Alone	Colour:	Aluminium die-cast
		IP Rating:	Black
			IP65

FEATURES:

- 180 W homogeneous output with 70° beam angle
- 1800 K–10,000 K CCT with high CRI
- Suitable for temporary outdoor applications (IP65)
- Silent operations (fanless)
- Manual/DMX controllable with built-in programs



Performer Pendant 75 Q6

33149 70 W RGBALC LED Fresnel

SHOWTEC

Specifications:


Light Source Type: LED
 Light Source Quantity: 1
 Light Source Power: 80 W
 LED Colour Type: R / G / B / A / C / L
 Lumen Total: 2684 lm
 CRI: 92
 CCT Min.: 1800 K
 CCT Max.: 10000 K
 Beam Angle Circular: 30 °
 Control Mode: DMX / Master Slave / Stand Alone
 DMX Channels: 3 / 6 / 7 / 9 / 13 / 16
 Protocols: DMX / RDM

Wireless: Optional
 Power Supply: 100-240 VAC
 Power Consumption: 50-60 Hz
 Power Connector in: 70 W
 DMX Connector: Open End
 XLR 5P In/Out / Phoenix In/Out
 Length (mm): 332 mm
 Width (mm): 192 mm
 Height (mm): 115 mm
 Weight: 3.4 kg
 Material: Aluminium
 Housing: Aluminium
 Colour: Black



FEATURES:

- 70 W RGBALC LED house light
- Suitable for fixed installations
- 16 preset colours
- CCT colour temperature range of 1800 K–10,000 K
- Silent operations



Flush Mount Holder for Pendant 75 Q6

33148 For recessed mounting in suspended ceiling

SHOWTEC

Specifications:


Height (mm): 186 mm
 Width (mm): 550 mm
 Depth (mm): 47 mm

Weight: 1.2 kg
 Material: Metal
 Colour: Black



FEATURES:

- Modern industrial look
- Quick and easy installation



Cyclorama Adapter for Signature Profiles

200150 Bright, even cyclorama wash light

INFINITY

Specifications:

Height (mm): 320 mm
 Width (mm): 320 mm
 Depth (mm): 170 mm

Weight: 2.1 kg
 Material: Aluminium
 Colour: Black



FEATURES:

- Suitable for TS-260C7
- Smooth coverage of up to 12 m (40 ft)
- Efficient 2:1 spacing ratio (maximum)
- Heat- and impact-resistant polycarbonate lenses



Theatre Lights Accessories Theatre Lights



Cameleon Flood 15 Q4 Tour

42681 15x 5 W RGBW LED Flood – Power Pro True

SHOWTEC

Specifications:		Protocols:	DMX
Light Source Type:	LED	Power Supply:	100-240 VAC 50-60Hz
Light Source Quantity:	15	Power Consumption:	82 W
Light Source Power:	5 W	Power Connector in:	Power Pro True
LED Colour Type:	RGBW	Power Connector out:	Power Pro True
Refresh Rate:	4000 Hz	DMX Connector:	XLR 3P In/Out
Lumen Total:	3434 lm	Length (mm):	330 mm
CRI:	77	Width (mm):	105 mm
CCT:	7200 K	Height (mm):	210 mm
Beam Angle Hor.:	40 °	Weight:	4.8 kg
Beam Angle Vert.:	40 °	IP Rating:	IP65
Control Mode:	Auto / DMX / Manual / Master Slave	Housing:	Aluminum die-cast
		Colour:	Black
DMX Channels:	4 / 6 / 10		

FEATURES:

- 15x 5 W RGBW LED Flood
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for temporary outdoor use)
- 40° fixed beam angle
- Power Pro True connectors



Cameleon Flood 6 Q4 Tour

42682 6x 5 W RGBW LED Flood – Power Pro True

SHOWTEC

Specifications:		Protocols:	DMX
Light Source Type:	LED	Power Supply:	100-240 VAC 50-60Hz
Light Source Quantity:	6	Power Consumption:	35 W
Light Source Power:	5 W	Power Connector in:	Power Pro True
LED Colour Type:	RGBW	Power Connector out:	Power Pro True
Refresh Rate:	1200 Hz	DMX Connector:	XLR 3P In/Out
Lumen Total:	1337 lm	Length (mm):	220 mm
CRI:	77	Width (mm):	90 mm
CCT:	7200 K	Height (mm):	150 mm
Beam Angle Hor.:	40 °	Weight:	3.5 kg
Beam Angle Vert.:	40 °	IP Rating:	IP65
Control Mode:	Auto / DMX / Manual / Master Slave	Housing:	Aluminum die-cast
		Colour:	Black
DMX Channels:	4 / 6 / 10		

FEATURES:

- 6x 5 W RGBW LED Flood
- Suitable for colour mixing on stage
- IP65 (dust and water resistant, fit for temporary outdoor use)
- 40° fixed beam angle
- Power Pro True connectors



Helix M1100 Q4 Mobile


43750 8x 10 W RGBW LED Wash

SHOWTEC

Specifications:		Wireless:	Wireless DMX
Light Source Type:	LED	Power Supply:	100-240 VAC 50-60 Hz
Light Source Quantity:	8	Power Consumption:	75 W
Light Source Power:	10 W	Power Connector in:	powerCON TRUE1
LED Colour Type:	RGBW	Power Connector out:	powerCON TRUE1
Refresh Rate:	1200 Hz	DMX Connector:	XLR 5P In/Out
Lumen Total:	8800 lm	Cable Length:	1.5 m
Beam Angle Hor.:	10 °	Length (mm):	367 mm
Beam Angle Vert.:	10 °	Width (mm):	126 mm
Battery Type:	Lithium ion	Height (mm):	307 mm
Runtime @Full:	8 h	Weight:	7.9 kg
Control Mode:	Auto / Built-in Program / DMX / Manual / Master Slave	IP Rating:	IP65
		Housing:	Aluminium die-cast
		Colour:	Black
DMX Channels:	4 / 6 / 10		
Protocols:	DMX / RDM		

FEATURES:

- Mobile 8x 10 W RGBW LED Wash for temporary outdoor use (IP65)
- Operation up to 15 hours without charging
- 10° beam angle, optional beam shapers available
- Emergency backup mode and delayed output
- Tilt angle 180° adjustable
- W-DMX, DMX, Master/Slave, Manual, and Auto mode



Accent Spot SW

42542 Pinspot with tight beam


SHOWTEC

Specifications:		Power Supply:	100-240 VAC 50-60 Hz
Light Source Type:	LED	Power Consumption:	21 W
Light Source Quantity:	1	Power Connector in:	Power Pro Blue
Light Source Power:	25 W	Power Connector out:	Power Pro Grey
LED Colour Type:	A / WW / CW	DMX Connector:	XLR 3P In/Out
Refresh Rate (min):	1000 Hz	Length (mm):	245 mm
Refresh Rate (max):	12 kHz	Width (mm):	160 mm
Lumen Total:	465 lm	Height (mm):	105 mm
Beam Angle Circular:	4.5 °	Weight:	1.74 kg
Control Mode:	DMX / Manual / Master Slave / Static Dimmer	IP Rating:	IP20 (indoor use only)
DMX Channels:	3 / 5 / 10	Housing:	Aluminium die-cast
Protocols:	DMX / RDM	Colour:	Black
		Cooling:	Passive



FEATURES:

- 25 W A/WW/CW LED
- 4.5° Beam angle
- Two diffusers included (10° and 40°)
- Additional diffusers for 20° and 10x60° available
- Power Pro connections



Accent Spot Q4 RGBW

42541 Pinspot with tight beam


SHOWTEC

Specifications:		Power Supply:	100-240 VAC 50-60 Hz
Light Source Type:	LED	Power Consumption:	21 W
Light Source Quantity:	1	Power Connector in:	Power Pro Blue
Light Source Power:	25 W	Power Connector out:	Power Pro Grey
LED Colour Type:	RGBW	DMX Connector:	XLR 3P In/Out
Refresh Rate (min):	1000 Hz	Length (mm):	245 mm
Refresh Rate (max):	12 kHz	Width (mm):	160 mm
Lumen Total:	572 lm	Height (mm):	105 mm
Beam Angle Circular:	4.5 °	Weight:	1.7 kg
Control Mode:	DMX / Manual / Master Slave / Static Dimmer	IP Rating:	IP20 (indoor use only)
DMX Channels:	4 / 6 / 12	Housing:	Aluminium die-cast
Protocols:	DMX / RDM	Colour:	Black
		Cooling:	Passive



FEATURES:

- 25 W RGBW LED
- 4.5° Beam angle
- Two diffusers included (10° and 40°)
- Additional diffusers for 20° and 10x60° available
- Power Pro connections

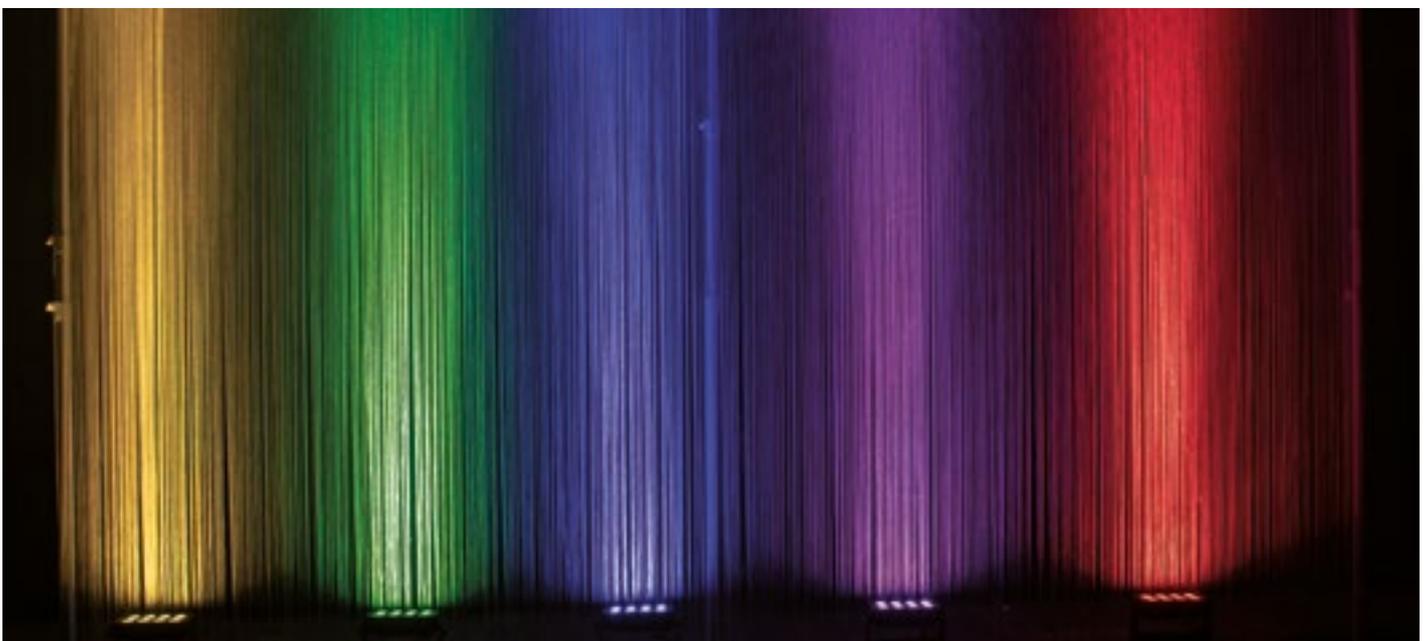



EventLITE Table-WW

- 44016** Compact 3.5 W IP54 battery lamp with touch dimmer - black
- 44015** Compact 3.5 W IP54 battery lamp with touch dimmer - white
- 44017** Compact 3.5 W IP54 battery lamp with touch dimmer - bronze

SHOWTEC

Specifications:		Power Connector in:	Micro USB
Light Source Type:	LED	Length (mm):	100 mm
Lumen Total:	200 lm	Width (mm):	100 mm
Runtime @Full:	12 h	Height (mm):	356 mm
Charging Time:	8 h	Weight:	1.34 kg
Battery Lifetime:	1000 cycles	IP Rating:	IP54
Power Supply:	5 VDC	Housing:	Aluminum
Power Consumption:	3.5 W	Colour:	Black/White/Bronze

FEATURES:

- 3.5 W WW LED light
- Suitable for illuminating a table or bar
- Touch dimmer
- Average battery run time: 16 hours
- IP54 rating, suitable for temporary outdoor use
- USB-A - micro-USB cable included
- Compact and stylish design



EventLITE Lantern-WW



- 44022** Modern 2.2 W IP54 battery lantern - black
- 44021** Modern 2.2 W IP54 battery lantern - white

SHOWTEC

Specifications:		Power Consumption:	2.2 W
Light Source Type:	LED	Power Connector in:	USB
Light Source Quantity:	25	Length (mm):	400 mm
Light Source Power:	0.01 W	Width (mm):	150 mm
LED Colour Type:	White	Height (mm):	150 mm
Lumen Total:	150 lm	Weight:	1.6 kg
Runtime @Full:	12 h	IP Rating:	IP54
Charging Time:	8 h	Housing:	Metal
Power Supply:	5 VDC	Colour:	Black/White

FEATURES:

- Simple-design rechargeable lantern
- Temporary outdoor waterproof design
- Suitable for terrace, courtyard, and garden
- Average battery run time: 16 hours
- Easy silicone handle
- Available in either black or white

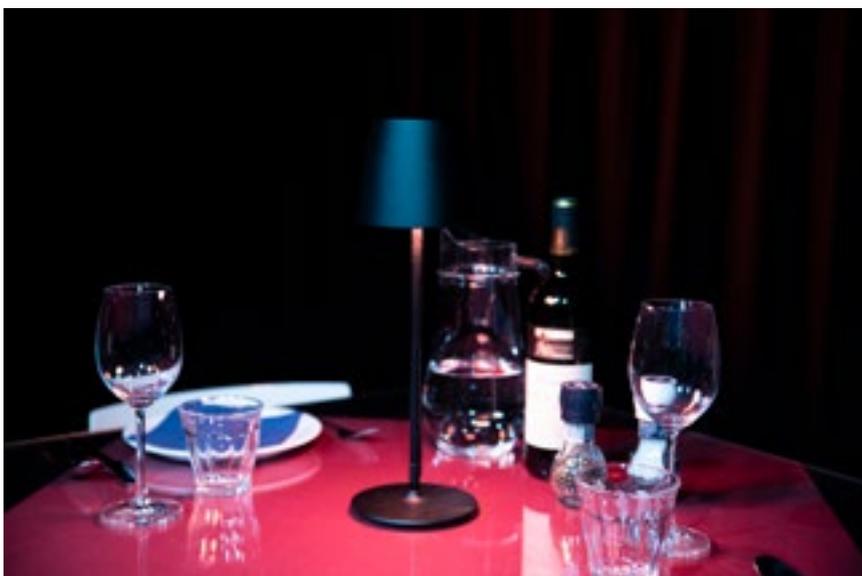

EventLITE Table-SW

- 44034** WW-NW Battery LED Lamp with touch dimmer - black
- 44033** WW-NW Battery LED Lamp with touch dimmer - white
- 44035** WW-NW Battery LED Lamp with touch dimmer - bronze

SHOWTEC

Specifications:		DMX Channels:	4
Light Source Type:	LED	Protocols:	Art-Net / sACN
Light Source Quantity:	12	Wireless:	Wifi
Light Source Power:	2 W	Power Supply:	5 VDC
LED Colour Type:	CWWW	Power Consumption:	10 W
Refresh Rate:	1000 Hz	Power Connector in:	USB
Lumen Total:	202 lm	Length (mm):	124 mm
Beam Angle Circular:	65 °	Width (mm):	124 mm
Runtime @Full:	8 h	Height (mm):	385 mm
Charging Time:	10 h	Weight:	0.95 kg
Control Mode:	App / Auto / Built-in Program / DMX / IR / Manual	IP Rating:	IP42
		Housing:	Aluminium die-cast
		Colour:	Black/White/Bronze

FEATURES:

- 2 W Smart White LED Light
- Suitable for illuminating a hospitality table
- Touch dimmer & Wi-Fi module
- Average battery run time: 16 hours



EventLITE Table-RGBW

- 44031** RGBW Battery LED Lamp with touch dimmer - black
- 44030** RGBW Battery LED Lamp with touch dimmer - white
- 44032** RGBW Battery LED Lamp with touch dimmer - bronze

SHOWTEC

Specifications:		Control Mode:	App / Auto / Built-in Program / DMX / IR / Manual
Light Source Type:	LED	DMX Channels:	4
Light Source Quantity:	12	Protocols:	Art-Net / sACN
Light Source Power:	2 W	Wireless:	Wifi
LED Colour Type:	RGBW	Power Supply:	5 VDC
Refresh Rate:	1000 Hz	Power Consumption:	10 W
Lumen Total:	144 lm	Power Connector in:	USB
CCT:	3100 K	Length (mm):	124 mm
Beam Angle Circular:	65 °	Width (mm):	124 mm
Runtime @Full:	8 h	Height (mm):	385 mm
Charging Time:	10 h	Weight:	0.95 kg
Battery Lifetime:	400 cycles	IP Rating:	IP42
		Housing:	Aluminium die-cast
		Colour:	Black/White/Bronze

FEATURES:

- 2 W RGBW LED Light
- Suitable for illuminating a hospitality table
- Touch dimmer & Wi-Fi module
- Average battery run time: 16 hours





Base Plate for EventLITE

44036 30 cm - white


SHOWTEC

Specifications:

Material: Steel
Colour: White

FEATURES:

- Provides solid base for EventLITE
- Strong adhesion for magnets in EventLITE base
- Suitable for windy outdoor situations
- Very thin - hides under table cloth



Case for 4x EventLITE Table

44040 Hard Plastic Suitcase with custom foam inlay


SHOWTEC

Specifications:

Length (mm): 533 mm
Width (mm): 404 mm
Height (mm): 183 mm
Material: Plastic
Housing: Plastic
Colour: Black

FEATURES:

- Lightweight
- Robust design
- Compartment for storing power adapters
- Black



Extension Tube for EventLITE

44038 50 cm - black

44037 50 cm - white

44039 50 cm - bronze


SHOWTEC

Specifications:

Material: Aluminium
Colour: Black/White/Bronze

FEATURES:

- M8 thread – compatible with all EventLITE models
- Seamlessly extends EventLITE poles
- Lightweight, but sturdy aluminium
- Available in matching colours





Mad Moon

43171 LED Effect Light


SHOWTEC


Specifications:

Light Source Type:	LED	Power Consumption:	122 W
Light Source Quantity:	1	Power Connector in:	IEC
Light Source Power:	100 W	Power Connector out:	IEC
LED Colour Type:	CW	DMX Connector:	XLR 3P In/Out
Control Mode:	DMX / Master Slave / Sound	Height (mm):	176 mm
DMX Channels:	4 / 6	Width (mm):	308 mm
Protocols:	DMX	Depth (mm):	199 mm
Power Supply:	100-240 VAC	Weight:	3.7 kg
	50-60 Hz	IP Rating:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- 100 W Cold White LED Engine
- Wide beam angle of 75 degrees
- Excellent optics for powerful output
- 4/6-Channel DMX, Master/slave, and Sound modes
- Ideally suited for low ceilings and short-throw projection applications



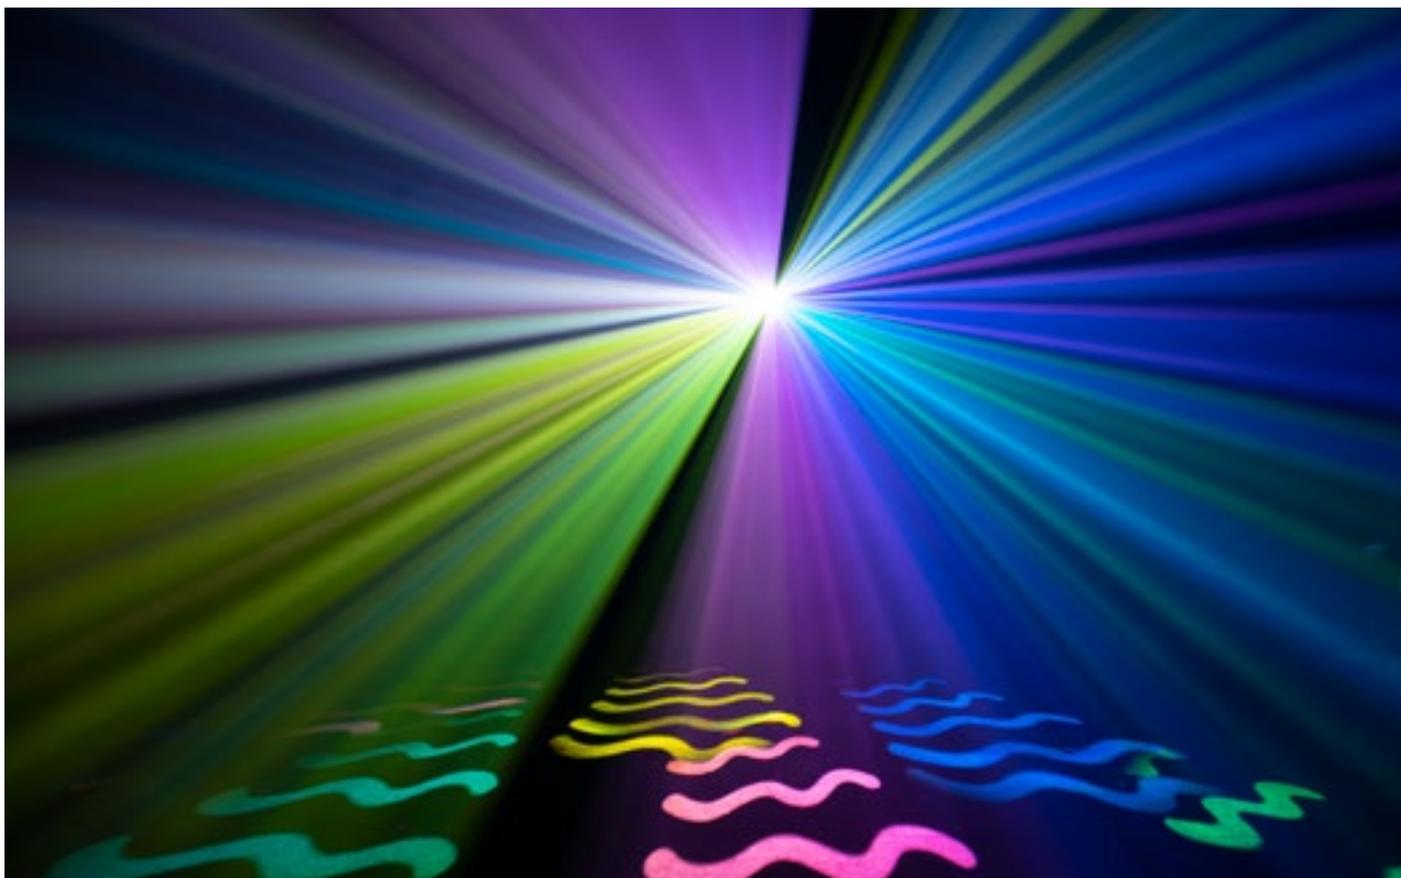

Rainbow Moon

43172 LED Effect Light

SHOWTEC

Specifications:

Light Source Type:	LED	Power Consumption:	125 W
Light Source Quantity:	1	Power Connector in:	IEC
Light Source Power:	100 W	Power Connector out:	IEC
LED Colour Type:	CW	DMX Connector:	XLR 3P In/Out
Control Mode:	DMX / Master Slave / Sound	Height (mm):	171 mm
DMX Channels:	4 / 6	Width (mm):	308 mm
Protocols:	DMX	Depth (mm):	199 mm
Power Supply:	100-240 VAC	Weight:	3.8 kg
	50-60 Hz	IP Rating:	IP20 (indoor use only)
		Housing:	Metal
		Colour:	Black

FEATURES:

- 100 W Cold White LED Engine
- Wide beam angle of 75 degrees
- Excellent optics for powerful output
- 4/6-Channel DMX, Master/slave, and Sound modes
- Ideally suited for low ceilings and short-throw projection applications





Solaris 3.0


51360 High-power RGB Laser with ILDA control

SHOWTEC

Specifications:		Power Connector out:	powerCON TRUE1
Laser Power:	3000 mW	Data Connector:	ILDA DB25
Laser Source:	Diode	Height (mm):	213 mm
Laser Modulation:	Analog	Width (mm):	284 mm
Laser Class:	4	Depth (mm):	186 mm
Laser Colour:	Red / Green / Blue	Weight:	5.1 kg
Control Mode:	Art-Net / DMX / ILDA	IP Rating:	IP20 (indoor use only)
Laser Scanner Speed:	30 K	Housing:	Aluminium
Power Supply:	100-240 VAC	Colour:	Black
	50-60 Hz	Laser Scanner:	30 kpps
Power Consumption:	100 W	Reference Standard:	CE
Power Connector in:	powerCON TRUE1		

FEATURES:

- 3.000 mW Full-colour laser with ILDA and Art-Net control
- Full colour spectrum thanks to analogue laser control
- 60° laser scan angle, scanning up to 30 kpps at 8°
- Low beam divergence (<1.4 mrad at full angle)

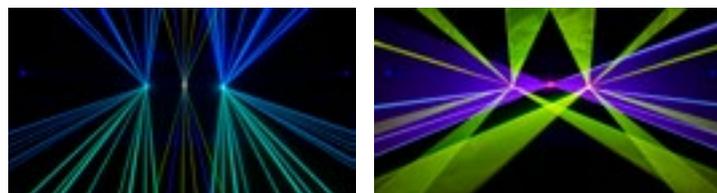

Solaris 3.0 Incl. FB4 Module


51361 High-power RGB Laser with Pangolin FB4

SHOWTEC

Specifications:		Power Connector out:	powerCON TRUE1
Laser Power:	3000 mW	Data Connector:	etherCON In/Out
Laser Source:	Diode	Height (mm):	157 mm
Laser Modulation:	Analog	Width (mm):	284 mm
Laser Class:	4	Depth (mm):	188.5 mm
Laser Colour:	Red / Green / Blue	Weight:	5.1 kg
Control Mode:	Art-Net / DMX / ILDA / SD Card	IP Rating:	IP20 (indoor use only)
Laser Scanner Speed:	30 K	Housing:	Aluminium
Power Supply:	240 VAC 50-60 Hz	Colour:	Black
Power Consumption:	150 W	Laser Scanner:	30 kpps
Power Connector in:	powerCON TRUE1	Reference Standard:	CE

FEATURES:

- 3.000 mW Full-colour laser with Pangolin FB4, ILDA, and Art-Net control
- Free use of QuickShow software thanks to FB4 module
- Full colour spectrum thanks to analogue laser control
- 60° laser scan angle, scanning up to 30 kpps at 8°
- Low beam divergence (<1.4 mrad at full angle)



51367 Remote Interlock for Solaris Effect Laser

SHOWTEC

Power Connector in:	RJ45
Data Connector:	etherCON In/Out
Height (mm):	0.65 mm
Width (mm):	0.71 mm
Depth (mm):	0.78 mm
Weight:	0.202 kg
IP Rating:	IP20 (indoor use only)
Housing:	Plastic
Colour:	Orange



Solaris 5.5

51363 High-power RGB Laser with Pangolin FB4

SHOWTEC

Specifications:		Power Connector out:	powerCON TRUE1
Laser Power:	5500 mW	Data Connector:	ILDA DB25 / RJ45 In/ Out
Laser Source:	Diode	Height (mm):	164 mm
Laser Modulation:	Analog	Width (mm):	219 mm
Laser Class:	4	Depth (mm):	266 mm
Laser Colour:	Red / Green / Blue	Weight:	9.3 kg
Control Mode:	Art-Net / DMX / ILDA / SD Card	IP Rating:	IP20 (indoor use only)
Power Supply:	100-240 VAC	Housing:	Aluminium
Power Consumption:	150 W	Colour:	Black
Power Connector in:	powerCON TRUE1	Laser Scanner:	35 kpps



FEATURES:

- 5.500 mW Full-colour laser with Pangolin FB4, ILDA, and Art-Net control
- Free use of QuickShow software thanks to FB4 module
- Full colour spectrum thanks to analogue laser control
- 45° laser scan angle, scanning up to 35 kpps at 8°
- Low beam divergence (<1.1 mrad at full angle)



Solaris 11.0

51365 High-power RGB Laser with Pangolin FB4

SHOWTEC

Specifications:		DMX Connector:	XLR 5P In/Out
Laser Power:	11000 mW	Data Connector:	ILDA DB25 / RJ45 In/ Out
Laser Source:	Diode	Height (mm):	169 mm
Laser Modulation:	Analog	Width (mm):	235 mm
Laser Class:	4	Depth (mm):	349 mm
Laser Colour:	Red / Green / Blue	Weight:	12.5 kg
Control Mode:	Art-Net / DMX / ILDA / SD Card	IP Rating:	IP20 (indoor use only)
Power Supply:	100-240 VAC	Housing:	Aluminium
Power Consumption:	350 W	Colour:	Black
Power Connector in:	powerCON TRUE1	Laser Scanner:	30 kpps
Power Connector out:	powerCON TRUE1		



FEATURES:

- 11.000 mW Full-colour laser with Pangolin FB4, ILDA, and Art-Net control
- Free use of QuickShow software thanks to FB4 module
- Full colour spectrum thanks to analogue laser control
- 45° laser scan angle, scanning up to 30 kpps at 8°
- Low beam divergence (<1.1 mrad at full angle)





Festoon Light E27

- E360000** 100 cm spacing - Black - 10 m
- E360010** 100 cm spacing - Black - 20 m
- E360020** 100 cm spacing - Black - 50 m
- E360100** 100 cm spacing - White - 10 m
- E360110** 100 cm spacing - White - 20 m
- E360120** 100 cm spacing - White - 50 m

SHOWGEAR

Specifications:

Power Supply:	220V-240 VAC 50 Hz	IP Rating:	IP44
Power Connector in:	Schuko Plug	Material:	Rubber
Length String:	10-50 m	Colour:	Black/ White
Weight:	1.8 kg	Lamp Spacing:	1000 mm

FEATURES:

- IP44 - Splash-proof, suitable for outdoors
- 100 cm (39.4") spacing between sockets
- Daisy-chainable
- Including 1.5 m (5 ft) power cable
- 1.5 mm² rubber cable
- Light bulbs not included



Festoon Light E27

- E360001** 50 cm spacing - Black - 10 m
- E360011** 50 cm spacing - Black - 20 m
- E360021** 50 cm spacing - Black - 50 m
- E360101** 50 cm spacing - White - 10 m
- E360111** 50 cm spacing - White - 20 m
- E360121** 50 cm spacing - White - 50 m

SHOWGEAR

Specifications:

Power Supply:	220V-240 VAC 50 Hz	IP Rating:	IP44
Power Connector in:	Schuko Plug	Material:	Rubber
Length String:	10-50 m	Colour:	Black/White
Weight:	1.8 kg	Lamp Spacing:	500 mm

FEATURES:

- IP44 - Splash-proof, suitable for outdoors
- 50 cm (19.7") spacing between sockets
- Daisy-chainable
- Including 1.5 m (5 ft) power cable
- 1.5 mm² rubber cable
- Light bulbs not included



Power Cable for Festoon Light E27

- E360200** Black - 3 m
- E360201** White - 3 m

SHOWGEAR

Specifications:

Power Supply:	220V-240 VAC 50 Hz	Length String:	3 m
Power Connector in:	Schuko Plug	Weight:	0.5 kg
		Colour:	Black/White

FEATURES:

- IP44 - Splash-proof, suitable for outdoors
- 1.5 mm² rubber cable
- EU version



G45 LED Bulb E27 - WW - Clear

SHOWGEAR

E324030 2 W - Dimmable

Light Source Type: LED
 Light Source Power: 1 W
 LED Colour Type: NW
 Life Expectancy: 20000 h
 Lamp Socket: E27
 Lumen Total: 120 lm
 Dimmable: Yes
 Power Supply: 220V-240 VAC 50 Hz
 Power Consumption: 2 W
 Length (mm): 70 mm
 Ø: 45 mm



S14 LED Bulb - WW - E27

SHOWGEAR

E324031 2 W - Warm White - Dimmable

Light Source Type: LED
 Light Source Power: 1 W
 Life Expectancy: 20000 h
 Lamp Socket: E27
 Lumen Total: 75 lm
 Dimmable: Yes
 Power Supply: 220V-240 VAC 50 Hz
 Power Consumption: 2 W
 Length (mm): 88 mm
 Ø: 45 mm




G45 LED Bulb E27

SHOWGEAR

- E324005 1 W, Orange, Non-Dimmable**
- E324003 1 W, Blue, Non-Dimmable**
- E324006 1 W, Pink, Non-Dimmable**
- E324002 1 W, Green, Non-Dimmable**
- E324004 1 W, Yellow, Non-Dimmable**
- E324001 1 W, Red, Non-Dimmable**
- E324000 1 W, Warm White, Non-Dimmable**

Light Source Type: LED
 Light Source Power: 0.2 W
 Life Expectancy: 20000 h
 Lamp Socket: E27
 Lumen Total: 18 lm
 Dimmable: No
 Power Supply: 100-240 VAC 50-60 Hz
 Power Consumption: 1 W
 Length (mm): 70 mm
 Ø: 45 mm
 LED Colour Type: Orange, Blue, Pink, Green, Yellow, Red, Warm White



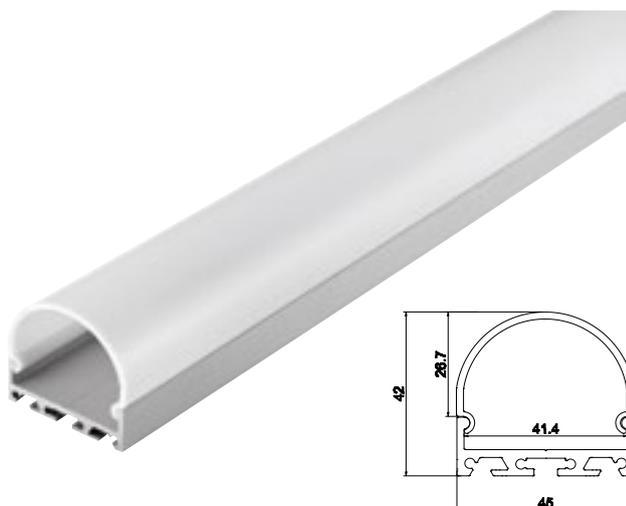

Profile Pro-Line 34

A9930486 LED aluminium profile with Round PC diffuser

ARTECTA

Specifications:

Height (mm): 42 mm
Width (mm): 45 mm
Colour: Silver

FEATURES:

- Round profile for finishing <35 mm wide (1.38") LED strips
- For creating elegant and subtle line lighting
- Suitable for surface attachment
- Aluminium profile with opal frosted PMMA cover
- 2 end caps and 2 clips included
- 2 metre long (78.7")
- 42 mm high (1.65") & 45 mm wide (1.77")



End Cap set for Pro-Line 34 (2 pieces)


A9930488 Aluminium - round

ARTECTA

Height (mm): 42 mm
Width (mm): 45 mm
Colour: Silver
Mounting Options: Surface

FEATURES:

- Two end caps for Profile Pro-Line 34
- Aluminium
- 42 mm high (1.65") & 45 mm wide (1.77")

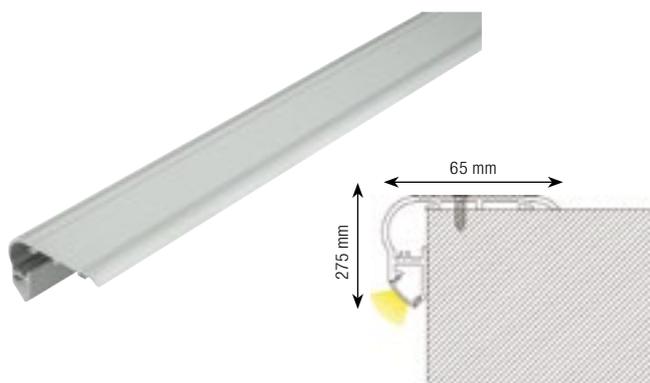

Profile Pro-Line 30 Stair

A9930417 Natural Anodised Aluminium

ARTECTA

Specifications:

Height (mm): 27.5 mm
Width (mm): 65 mm
Colour: Silver

FEATURES:

- Profile for <13 mm wide (0.51") LED strip
- Suitable for creating stairway lighting
- 2 metre long (78.7")
- 27.5 mm high (1.1") & 65 mm wide (2.6")
- Natural aluminium housing



Profile Pro-Line 33

A9930485 LED aluminium profile with opal frosted PMMA diffuser



ARTECTA

Specifications:

Height (mm): 42 mm
Width (mm): 45 mm
Colour: Silver

FEATURES:

- Profile for finishing <35 mm wide (1.38") LED strips
- For creating elegant and subtle line lighting
- Suitable for surface attachment
- Aluminium profile with opal frosted PMMA cover
- 2 end caps and 2 clips included
- 2 metre long (78.7")
- 42 mm high (1.65") & 45 mm wide (1.77")

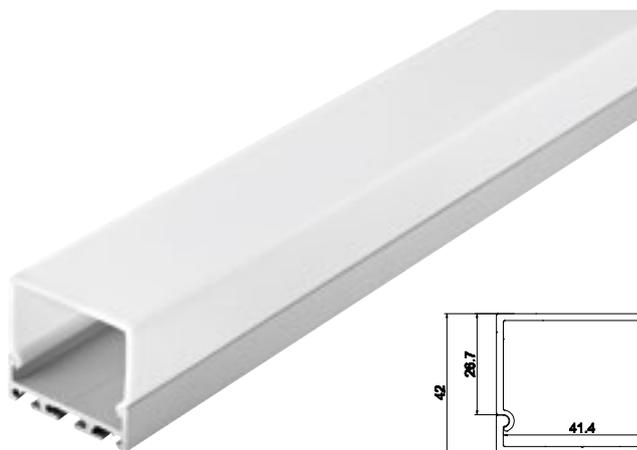

End Cap set for Pro-Line 33 (2 pieces)

A9930487 Aluminium - rectangular



ARTECTA

Specifications:

Height (mm): 42 mm
Width (mm): 45 mm
Colour: Silver

FEATURES:

- Two end caps for Profile Pro-Line 33
- Aluminium
- 42 mm high (1.65") & 45 mm wide (1.77")

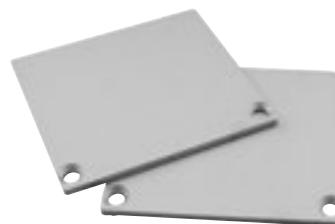

Mounting Clip for Pro-Line 33/34

A9930489 2 pieces

ARTECTA

Height (mm): 8 mm
Width (mm): 20 mm
Colour: Silver
Mounting Options: Surface

FEATURES:

- Mounting Clips for Pro-Line 33 and Pro-Line 34
- 2 pieces
- Metal



Aviano 10 CCT ARTECTA

A0720115 10 W Switchable White LED

Floodlight

Light Source Type:	LED
LED Colour Type:	WW / CW / NW
Lumen Total:	900 lm
Beam Angle Circular:	120 °
Power Consumption:	10 W
Length (mm):	126 mm
Height (mm):	44 mm
Width (mm):	133 mm
IP Rating:	IP65
Colour:	Black



Aviano 20 CCT ARTECTA

A0720116 20 W Switchable White LED

Floodlight

Light Source Type:	LED
LED Colour Type:	WW / CW / NW
Lumen Total:	1800 lm
Beam Angle Circular:	120 °
Power Consumption:	20 W
Length (mm):	161 mm
Height (mm):	44 mm
Width (mm):	164 mm
IP Rating:	IP65
Colour:	Black



Aviano 30 CCT ARTECTA

A0720117 30 W Switchable White LED

Floodlight

Light Source Type:	LED
LED Colour Type:	WW / CW / NW
Lumen Total:	2700 lm
Beam Angle Circular:	120 °
Power Consumption:	30 W
Length (mm):	198 mm
Height (mm):	44 mm
Width (mm):	190 mm
IP Rating:	IP65
Colour:	Black



Aviano 50 CCT ARTECTA

A0720118 50 W Switchable White LED

Floodlight

Light Source Type:	LED
LED Colour Type:	WW / CW / NW
Lumen Total:	4500 lm
Beam Angle Circular:	120 °
Power Consumption:	50 W
Length (mm):	229 mm
Height (mm):	65 mm
Width (mm):	232 mm
IP Rating:	IP65
Colour:	Black



Controllers

Artecta Accessories

RGB+CCT Handheld Remote

A9916001 Zigbee connectivity

ARTECTA

Specifications:

Control Mode:	ZigBee	Length (mm):	137 mm
Protocols:	ZigBee	Height (mm):	13 mm
Battery Type:	AAA	Width (mm):	45 mm
		IP Rating:	IP20 (indoor use only)

FEATURES:

- Suitable for RGB(W), RGB+CCT, DIM & CCT devices with Zigbee receiver
- Battery operated with low power consumption
- Supports 3 zones
- 5 dynamically programmable scenes
- Transmission range up to 30 m (100 ft)



ZigBee LED controller 5 ch

A9916000 Compatible with ZigBee, Philips HUE and other smart home software


ARTECTA


Specifications:

Control Mode:	ZigBee	Length (mm):	145 mm
Dimmable:	Yes	Height (mm):	16 mm
Power Supply:	12-24 VDC	Width (mm):	46.5 mm
		IP Rating:	IP20 (indoor use only)

FEATURES:

- Philips HUE compatible and other universal ZigBee gateway products
- Zigbee 3.0 mesh network
- Control single colour, Tunable White, RGB(W) and RGB+CCT



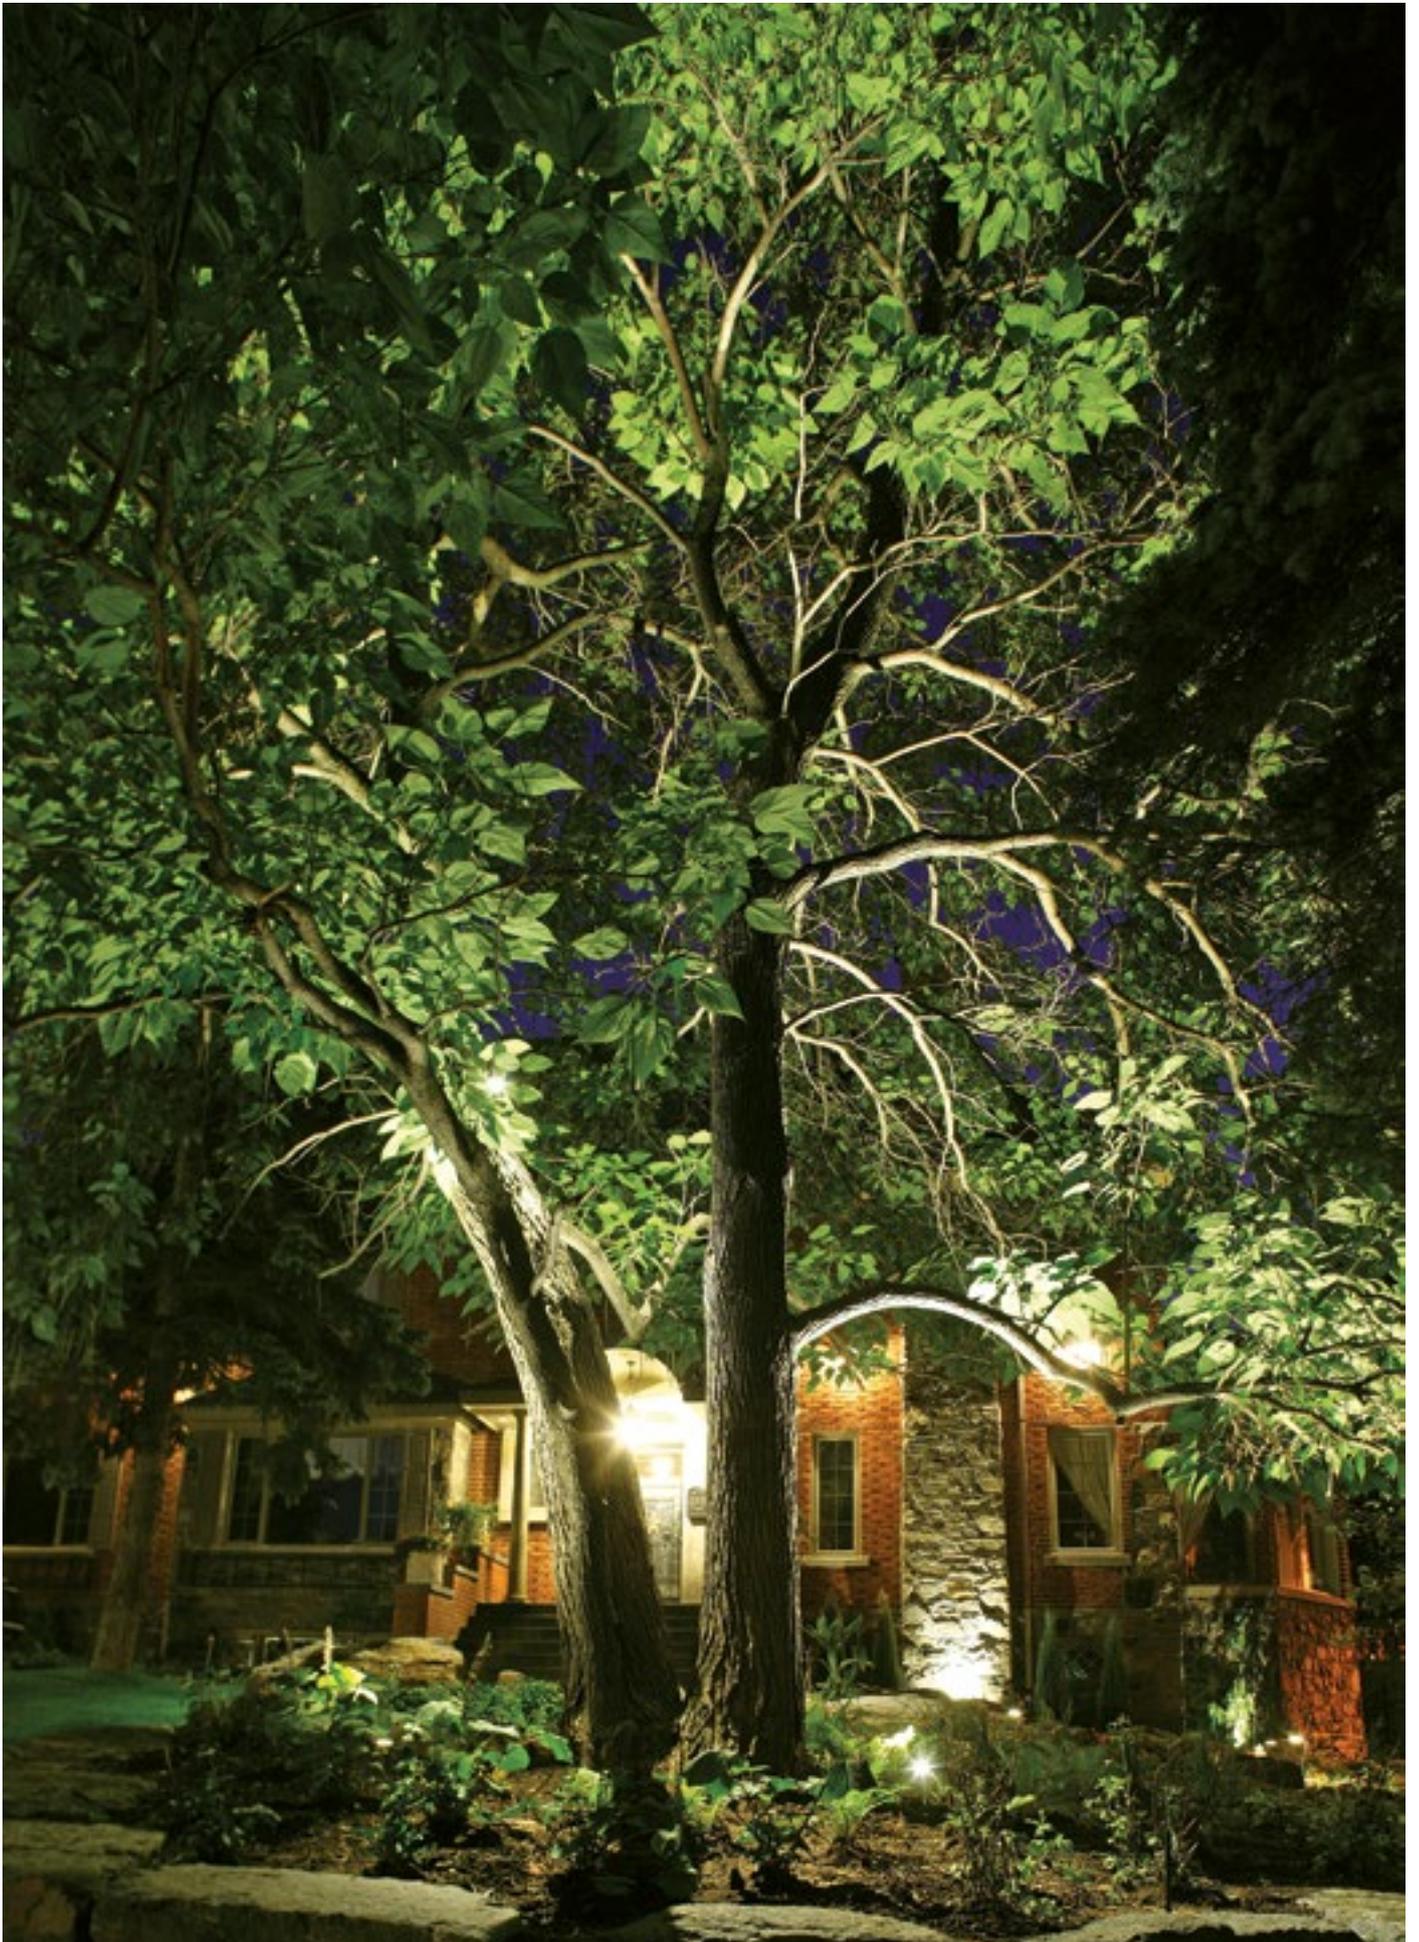



QubiQ S1000 Smoke Machine

61060 High performance 1000 W smoke machine

SHOWTEC

Specifications:		Length (mm):	426 mm
Power Supply:	220V-240 VAC 50 Hz	Height (mm):	280 mm
Power Consumption:	1000 W	Width (mm):	305 mm
Power Connector in:	Power Pro Blue	Weight:	9.2 kg
DMX Connector:	XLR 3P In/Out	IP Rating:	IP20 (indoor use only)
Heater:	1000 W	Control Mode:	DMX / Manual / Remote / Timer
Warm-up Time:	3 min	DMX Channels:	1
Output Direction:	Forward	Included Remotes:	Timer / Wired

FEATURES:

- Reliable and safe due to temperature protection and liquid sensor
- Continuous and steady output till tank runs out of liquid
- Adjustable output level (0–100 %)
- Manual, (timer) remote and DMX control
- 1 L tank capacity
- 3 min warm-up time
- Including remote control with timer function



QubiQ S1500 Smoke Machine

61061 High performance 1500 W smoke machine

SHOWTEC

Specifications:		Length (mm):	450 mm
Power Supply:	220V-240 VAC 50 Hz	Height (mm):	280 mm
Power Consumption:	1500 W	Width (mm):	305 mm
Power Connector in:	Power Pro Blue	Weight:	10.8 kg
DMX Connector:	XLR 3P In/Out	IP Rating:	IP20 (indoor use only)
Heater:	1500 W	Control Mode:	DMX / Manual / Remote / Timer
Warm-up Time:	4.5 min	DMX Channels:	1
Output Direction:	Forward	Included Remotes:	Timer / Wired

FEATURES:

- Reliable and safe due to temperature protection and liquid sensor
- Continuous and steady output till tank runs out of liquid
- Adjustable output level (0–100 %)
- Manual, (timer) remote and DMX control
- 1.5 L tank capacity
- 4.5 min warm-up time
- Including remote control with timer function



QubiQ S2500 Smoke Machine

61062 High performance 2500 W smoke machine

SHOWTEC

Specifications:		Length (mm):	447 mm
Power Supply:	220V-240 VAC 50 Hz	Height (mm):	329 mm
Power Consumption:	2500 W	Width (mm):	324 mm
Power Connector in:	Power Pro Blue	Weight:	11.5 kg
DMX Connector:	XLR 3P In/Out	IP Rating:	IP20 (indoor use only)
Heater:	2500 W	Control Mode:	DMX / Manual / Remote / Timer
Warm-up Time:	4.5 min	DMX Channels:	1
Output Direction:	Forward	Included Remotes:	Timer / Wired

FEATURES:

- Reliable and safe due to temperature protection and liquid sensor
- Continuous and steady output till tank runs out of liquid
- Adjustable output level (0–100 %)
- Manual, (timer) remote and DMX control
- 2.3 L tank capacity
- 4.5 min warm-up time
- Including remote control with timer function



QubiQ F1500 Fazer

61080 High performance 1500 W fazer

SHOWTEC

Specifications:

Power Supply:	220V-240 VAC 50 Hz	Fluid Tank Capacity:	2.3 L
Power Consumption:	1500 W	Length (mm):	385 mm
Power Connector in:	Power Pro Blue	Height (mm):	330 mm
DMX Connector:	XLR 3P In/Out	Width (mm):	412 mm
Heater:	1500 W	Weight:	15.1 kg
Warm-up Time:	4 min	Control Mode:	DMX / Remote
Output Direction:	Forward	DMX Channels:	2
		Included Remotes:	Timer / Wired

FEATURES:


- Reliable and safe due to temperature protection and liquid sensor
- Continuous and steady output till tank runs out of liquid
- Adjustable output level (0–100 %)
- Manual, (timer) remote and DMX control
- 2.3 L tank capacity
- 4 min warm-up time
- Including remote control with timer function



Remote for QubiQ Series

SHOWTEC

61065 Manual and timer control

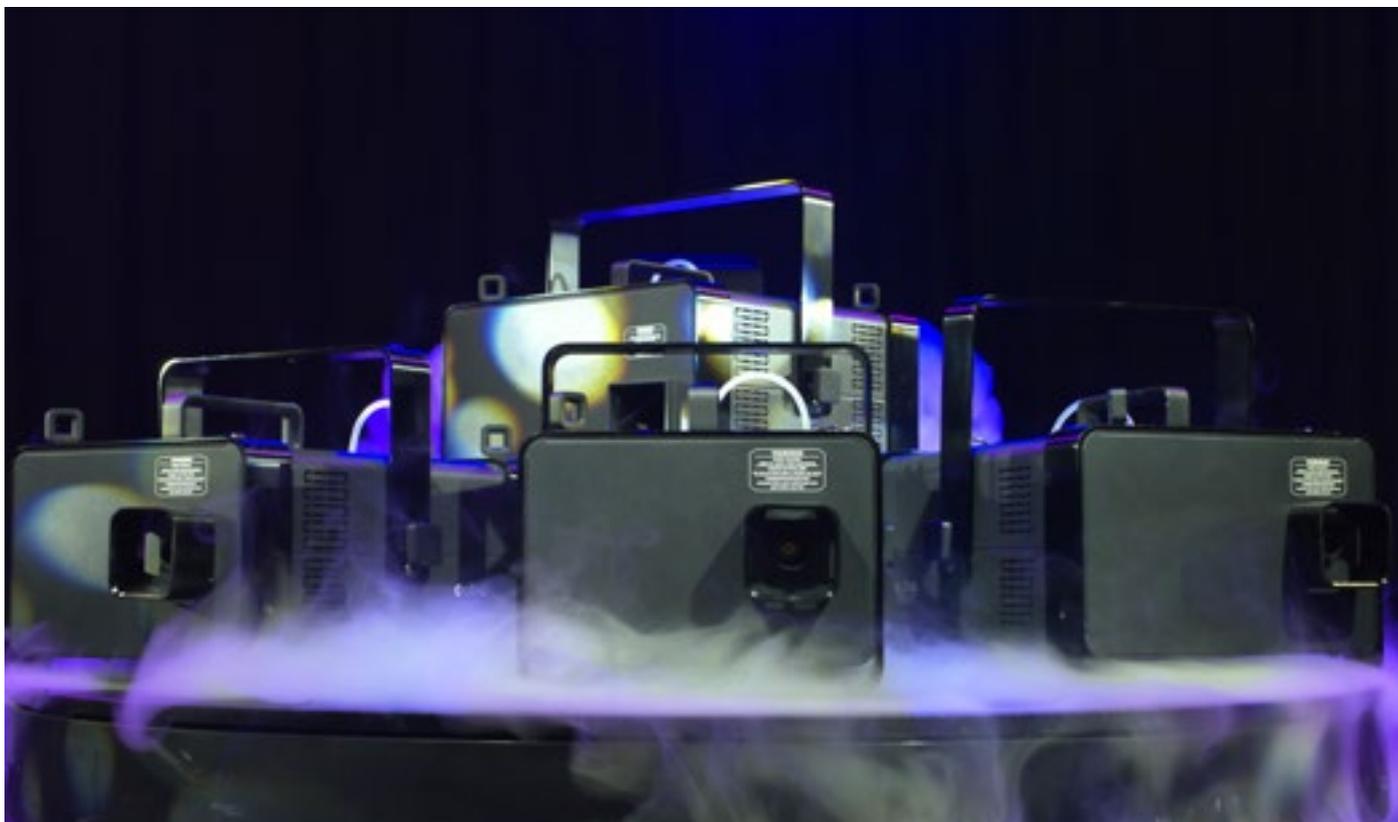



Antari S-600 Yeti

80396 Powerful Snow Machine

ANTARI

Specifications:

Power Supply: 220V-240 VAC 50 Hz
 Power Consumption: 1200 W
 Power Connector in: powerCON TRUE1
 DMX Connector: XLR 5P In/Out
 Fluid Consumption: 400 ml/min
 Fluid Tank Capacity: 5 L
 Length (mm): 461 mm

Height (mm): 629 mm
 Width (mm): 596 mm
 Weight: 24 kg
 IP Rating: IP20 (indoor use only)
 Control Mode: DMX
 Wireless: Optional
 Included Remotes: W-2

FEATURES:

- High output (400 ml/min)
- Powerful blower (>20 m)(>65 ft)
- Wireless remote included
- 5-pin wired DMX remote functionality
- Wired and W-DMX remote optionally available
- Built-in electronic controls and timer



Bottle Holder for S-600 Yeti ANTARI

80399 Suitable for 5 L jerry can



WTR-90 ANTARI

80397 Wireless DMX Kit



SC-4 Remote ANTARI

80398 Wired remote for volume, fan/blower speed and timer



FP20 Hybrid Cable - Power Pro & 3-pin XLR - DMX / Power

DAP

- FP20150** 1.5 m, black jacket
- FP203** 3 m, black jacket
- FP206** 6 m, black jacket
- FP2010** 10 m, black jacket
- FP2015** 15 m, black jacket



FP21 Hybrid Cable - Power Pro & 5-pin XLR - DMX / Power

DAP

- FP21150** 1.5 m, black jacket
- FP213** 3 m, black jacket
- FP216** 6 m, black jacket
- FP2110** 10 m, black jacket
- FP2115** 15 m, black jacket



FP22 Hybrid Cable - Power Pro True & 3-pin XLR - DMX / Power

DAP

- FP22150** 1.5 m, black jacket
- FP223** 3 m, black jacket
- FP226** 6 m, black jacket
- FP2210** 10 m, black jacket
- FP2215** 15 m, black jacket



FP23 Hybrid Cable - Power Pro True & 5-pin XLR - DMX / Power

DAP

- FP23150** 1.5 m, black jacket
- FP233** 3 m, black jacket
- FP236** 6 m, black jacket
- FP2310** 10 m, black jacket
- FP2315** 15 m, black jacket



AV Cables
 Prefab Cables

HDMI 2.1 AOC 8K Fibre Cable

- FV4515** Gold plated - UHD - 15 m
- FV4530** Gold plated - UHD - 30 m
- FV4550** Gold plated - UHD - 50 m

DAP

Specifications:

Cable Length: 15-50 m
 Cable Type: Hybrid Fibre Optic
 Outer Cable Ø: 4.5 mm



FEATURES:

- HDMI 2.1 AOC Fibre Optic Cable (male - male)
- Backwards compatible (HDMI 2.0 / 1.4)
- Supports up to 8K @ 60 Hz
- Gold-plated contacts
- No external power supply required



Speaker Cables

Cables on Spool

SPC-275-DCA-s2-d0-a3 - CPR Speaker Cable

DAP

D9210 NEN 8012 - 2x 0.75 mm² - 100 m - black



D9211 NEN 8012 - 2x 0.75 mm² - 100 m - white



Cable Length: 100 m
 Max. Wire Size: 0.75 mm²
 Outer Cable Ø: 4.8 mm
 Outer Isolation Type: PVC-LSZH
 Packaging: Spool
 Fire Retardant: Dca-s2,d0,a3



SPC-215-DCA-s2-d0-a3 - CPR Speaker Cable

DAP

D9215 NEN 8012 - 2x 1.5 mm² - 100 m - black



D9216 NEN 8012 - 2x 1.5 mm² - 100 m - white



Cable Length: 100 m
 Max. Wire Size: 1.5 mm²
 Outer Cable Ø: 5.6 mm
 Outer Isolation Type: PVC-LSZH
 Packaging: Spool
 Fire Retardant: Dca-s2,d0,a3



SPC-225-DCA-s2-d0-a3 - CPR Speaker Cable

DAP


D9220 NEN 8012 - 2x 2.5 mm² - 100 m - black



D9221 NEN 8012 - 2x 2.5 mm² - 100 m - white



Cable Length: 100 m
 Max. Wire Size: 2.5 mm²
 Outer Cable Ø: 6.4 mm
 Outer Isolation Type: PVC-LSZH
 Packaging: Spool
 Fire Retardant: Dca-s2,d0,a3



100 M

SPC-275-DCA-s2-d0-a3 - CPR Speaker Cable

DAP

D9230 NEN 8012 - 2x 0.75 mm² - 300 m - black



D9231 NEN 8012 - 2x 0.75 mm² - 300 m - white



Cable Length: 300 m
Max. Wire Size: 0.75 mm²
Outer Cable Ø: 4.8 mm
Outer Isolation Type: PVC-LSZH
Packaging: Dispenser Box
Fire Retardant: Dca-s2,d0,a3



SPC-215-DCA-s2-d0-a3 - CPR Speaker Cable

DAP

D9235 NEN 8012 - 2x 1.5 mm² - 300 m - black



D9236 NEN 8012 - 2x 1.5 mm² - 300 m - white



Cable Length: 300 m
Max. Wire Size: 1.5 mm²
Outer Cable Ø: 5.6 mm
Outer Isolation Type: PVC-LSZH
Packaging: Dispenser Box
Fire Retardant: Dca-s2,d0,a3



SPC-225-DCA-s2-d0-a3 - CPR Speaker Cable

DAP

D9240 NEN 8012 - 2x 2.5 mm² - 300 m - black



D9241 NEN 8012 - 2x 2.5 mm² - 300 m - white



Cable Length: 300 m
Max. Wire Size: 2.5 mm²
Outer Cable Ø: 6.4 mm
Outer Isolation Type: PVC-LSZH
Packaging: Dispenser Box
Fire Retardant: Dca-s2,d0,a3



300 M



H07RN-F 3G1.5 Schuko Extension Cable

E606000	1 m long power extension cable
E606001	3 m long power extension cable
E606002	5 m long power extension cable
E606003	10 m long power extension cable
E606004	15 m long power extension cable
E606005	20 m long power extension cable

DAP

Specifications:

Rated Current (A):	16 A
Cable Type:	H07RN-F
Cable Length:	1-20 m
Wire Connection:	1.5 mm ²
Outer Isolation Type:	Neoprene
IP Rating:	IP44

FEATURES:

- Available in different sizes
- 16 A, suitable for attaching to mains
- 3x 1.5 mm² wires
- End cap included
- IP44 - protection from solids >1 mm and water splashing
- Black



H07RN-F 3G2.5 Schuko Extension Cable

E606010	1 m long power extension cable
E606011	3 m long power extension cable
E606012	5 m long power extension cable
E606013	10 m long power extension cable
E606014	15 m long power extension cable
E606015	20 m long power extension cable

DAP

Specifications:

Rated Current (A):	16 A
Cable Type:	H07RN-F
Cable Length:	1-20 m
Wire Connection:	2.5 mm ²
Outer Isolation Type:	Neoprene
IP Rating:	IP44

FEATURES:

- Available in different sizes
- 16 A, suitable for attaching to mains
- 3x 2.5 mm² wires
- End cap included
- IP44 - protection from solids >1 mm and water splashing
- Black



Powerport 4

E614000 Power Pro


SHOWGEAR

Specifications:

Rated Current (A): 16 A
IP Rating: IP20 (indoor use only)

FEATURES:

- 4 Schuko Outlets
- Power Pro in and output
- Metal case
- IP20



Powerport 4

E614001 Power Pro True


SHOWGEAR

Specifications:

Rated Current (A): 16 A
IP Rating: IP20 (indoor use only)

FEATURES:

- 4 Schuko Outlets
- Power Pro True in and output
- Metal case
- IP20



Stages Stage Accessories



Mammoth-D Guard Rail Clamp

70644B Black

SHOWGEAR

Specifications:

Height (mm): 94 mm
Width (mm): 86 mm

Depth (mm): 135 mm
Weight: 0.54 kg
Material: Steel

FEATURES:

- Dedicated for Mammoth-D/Mammoth Dex
- Easy to install
- Fast locking and releasing of Guard Rails
- Solid steel construction



Crowd Control Stage Accessories



Sign Holder for Barrier Black Eco

90013 Outside sign dimensions - 32x22 cm

SHOWGEAR

Specifications:

Colour: Black

FEATURES:

- A4 Signage Holder
- Transparent Acrylic Panel
- Stainless Steel
- Black



Mobile DJ Truss Stand Extension

70090 50 cm

70091 100 cm


SHOWGEAR

Specifications:

Length (m): 0.5 m / 1 m
Weight: 1.7 kg / 2.6 kg

FEATURES:

- Extension piece
- Available in different lengths
- Aluminium with polish finish
- Dedicated for Mobile DJ Truss Stand



Rigging Accessories Rigging

Tree/Pole Mounting Bracket


E748000 Tree/pole mounting bracket with ø 48 mm tube

Specifications:

WLL (kg): 50 kg
Height (mm): 200 mm
Ø: 50 mm
Tensile Strength: 250/500 daN

FEATURES:

- Suitable for mounting objects with 50 mm (2") clamp
- Quick and easy to attach
- Safety cable can be attached
- Strong steel construction with loadable weight up to 50 kg
- Including two 2 m (6.6 ft) tension straps





Pipe & Drape Transport Trolley

89613 For 9 curtains plus support

WENTEX

Specifications:

Length (mm):	800 mm
Height (mm):	1933 mm
Width (mm):	600 mm
Colour:	Black

FEATURES:

- Up to 9 Pipe & Drape curtains plus support gear
- Up to 10x Upright, Drape Support, Base Plate, and Pin
- Truck pack friendly dimensions
- Two 100-mm swivel wheels with brakes and two fixed wheels
- Space saving



Eurotrack manual switch 2-way

89560 Switch between two types of drapes

WENTEX

Specifications:

Length (mm):	955 mm
Height (mm):	111 mm
Width (mm):	500 mm
Max. Load:	40 kg

FEATURES:

- Suitable for Wextex Eurotrack system
- Strong \varnothing 8 mm / 50 m rope
- Suitable for heights up to 20 m
- Steel black powder coated frame base
- Prepared to mount standard truss clamps



Eurotrack Ceiling Mount

89562 Fast Mount

WENTEX

Specifications:

Length (mm):	60 mm
Height (mm):	35 mm
Width (mm):	35 mm

FEATURES:

- Ceiling Mount for Eurotrack
- Quick, toolless installation
- Black
- Built to last and outperform



Eurotrack - Rope connector curved

895361 for Heavy Duty Runner, black

WENTEX

Specifications:

Length (mm): 34 mm
Height (mm): 133.8 mm
Width (mm): 84 mm



Eurotrack - Rope guide black

89564

WENTEX

Specifications:



Length (mm): 89 mm
Height (mm): 25 mm
Width (mm): 25 mm



Eurotrack - Rope 8 mm, per metre

89561 Black

WENTEX

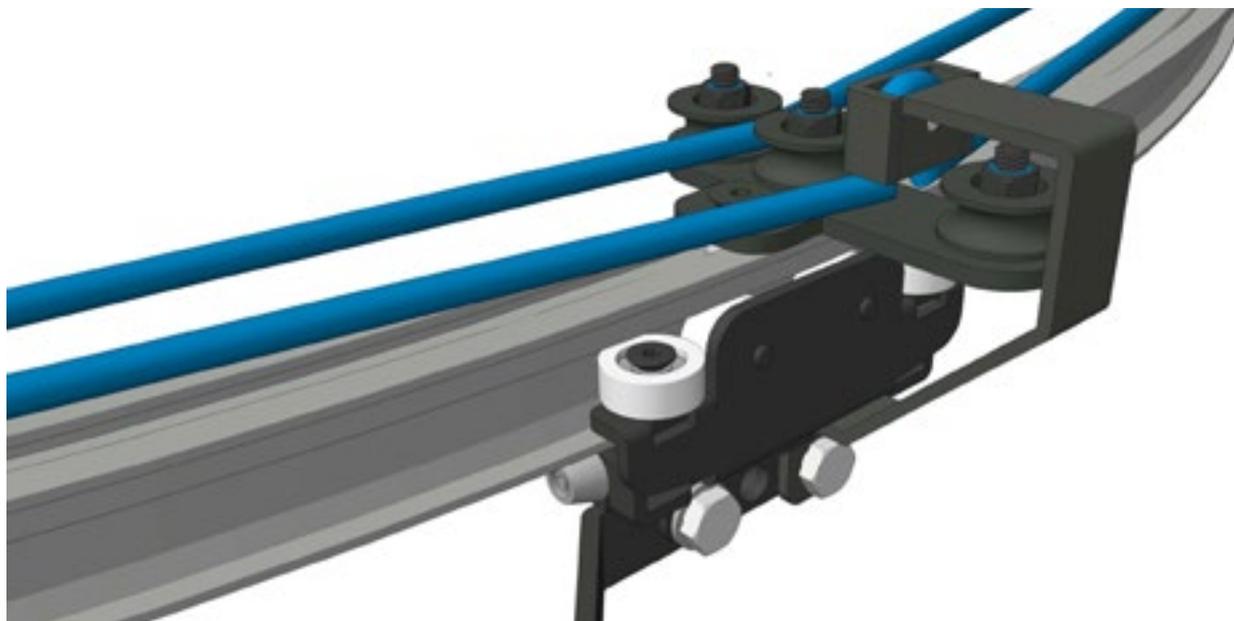

Wentex SET Frame solutions

“The Wentex SET Frame is an inventive, lightweight, aluminium textile frame system for quickly and easily creating exhibition or projection walls. You can use the modular system to build structures up to 6 metres high (~20 ft.) and as wide as you like. Frame modules come in different shapes and sizes. A built-in stacking system and clamps allow frames to link together securely and seamlessly.

Wentex Base Plates create a strong and stable base. You can use both front and rear effectively for projection. Creating an intermediate compartment for seamless LED screen installations is also very well possible. The Wentex SET Frame is an ideal framing solution for tendon/textile cloths (silicone-edge graphics) at conferences, exhibitions, trade fairs, seminars, and TV studios.“



SET Frame - A Module - 25 cm Wide

86004	25x25 cm (HxW)
86013	50x25 cm (HxW)
86023	75x25 cm (HxW)
86033	100x25 cm (HxW)

WENTEX

FEATURES:

- Lightweight aluminium frame
- Part of the modular Wentex SET Frame system
- Available in various sizes
- Suitable for tendon/textile clothes
- Built-in stacking system



SET Frame - A Module - 50 cm Wide

86000	25x50 cm (HxW)
86010	50x50 cm (HxW)
86020	75x50 cm (HxW)
86030	100x50 cm (HxW)

WENTEX

FEATURES:

- Lightweight aluminium frame
- Part of the modular Wentex SET Frame system
- Available in various sizes
- Suitable for tendon/textile clothes
- Built-in stacking system






SET Frame - A Module - 75 cm Wide

- 86001** 25x75 cm (HxW)
- 86011** 50x75 cm (HxW)
- 86021** 75x75 cm (HxW)
- 86031** 100x75 cm (HxW)

WENTEX

FEATURES:

- Lightweight aluminium frame
- Part of the modular Wentex SET Frame system
- Available in various sizes
- Suitable for tendon/textile clothes
- Built-in stacking system

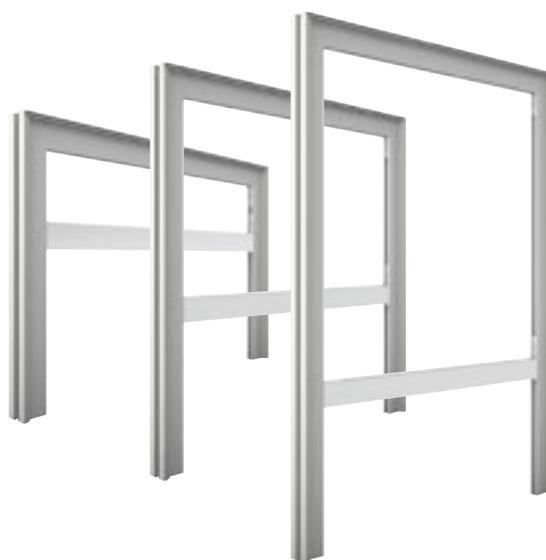

SET Frame - A Module - 100 cm Wide


- 86002** 25x100 cm (HxW)
- 86003** 38x100 cm (HxW)
- 86012** 50x100 cm (HxW)
- 86103** 69x100 cm (HxW)
- 86022** 75x100 cm (HxW)
- 86104** 81x100 cm (HxW)
- 86105** 94x100 cm (HxW)
- 86032** 100x100 cm (HxW)

WENTEX

FEATURES:

- Lightweight aluminium frame
- Part of the modular Wentex SET Frame system
- Available in various sizes
- Suitable for tendon/textile clothes
- Built-in stacking system



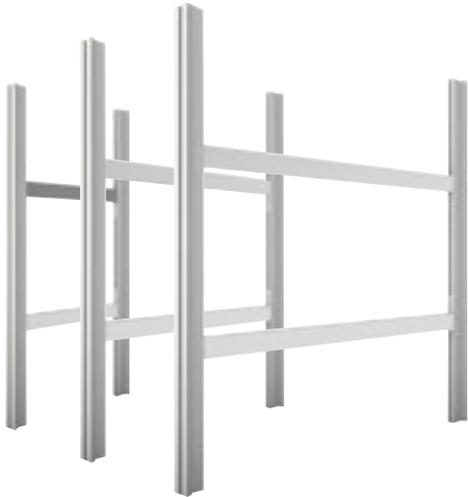

SET Frame - H Module - 100 cm in Height

- 86110** 100x25 cm (HxW) - extension piece
- 86100** 100x50 cm (HxW) - extension piece
- 86101** 100x75 cm (HxW) - extension piece
- 86102** 100x100 cm (HxW) - extension piece

WENTEX

FEATURES:

- Lightweight aluminium frame
- Part of the modular Wentex SET Frame system
- Available in various sizes
- Suitable for tendon/textile clothes
- Built-in stacking system



Connection Bracket for Set Frame

- 86200** For connecting modules along side





Fixed Upright

89325 100 cm (H), black

89324 100 cm (H), white

WENTEX

Specifications:

Height (m): 100 cm

FEATURES:

- Powder coated
- Suitable for Pipe & Drape
- Ideal height for FOH shielding
- 4-pin
- Ø 51 mm



Truss Stretch Cover

89237 30 m - black

89234 100 cm - black

89235 200 cm - black

89236 300 cm - black

SHOWGEAR

Specifications:

Washable: Yes
Fire Retardant: DIN 4102 B1

FEATURES:

- Designed to fit 4-point 290 mm trusses
- Fire retardant according to DIN 4102 B1
- Washable due to Polyester fabric
- Available different lengths (1–30 m)
- Available in black and white



TV Spigot

SHOWGEAR

E348000 115 mm, Ø 29 mm, M10

E348001 115 mm, Ø 29 mm, M12

Length (mm): 28 mm
Width (mm): 28 mm
Height (mm): 115 mm
Weight: 0.17 kg
Max. Load: 100 kg
Material: Aluminum



Gear Bags

Bags

Transport Bag for Media Panel 100

SHOWTEC

33311 Black Light Bag with accessory pocket

Length (mm): 500 mm
 Height (mm): 320 mm
 Width (mm): 80 mm
 Accessories Pocket: Yes



Transport Bag for Wentex Base Plate

SHOWGEAR

E840004 45x45 cm

Length (mm): 480 mm
 Height (mm): 25 mm
 Width (mm): 480 mm
 Inner Length: 450 mm
 Inner Height: 10 mm
 Inner Width: 450 mm
 Retractable Handle: Yes
 Accessories Pocket: Yes



Transport Bag for Square Base Plate 50x50 cm

SHOWGEAR

E840001 Suitable for D8602

Length (mm): 510 mm
 Height (mm): 25 mm
 Width (mm): 520 mm
 Retractable Handle: Yes
 Accessories Pocket: No



Transport Bag for Wentex Base Plate

SHOWGEAR

E840005 60x60 cm

Length (mm): 620 mm
 Height (mm): 25 mm
 Width (mm): 620 mm
 Inner Length: 600 mm
 Inner Height: 10 mm
 Inner Width: 600 mm
 Retractable Handle: Yes
 Accessories Pocket: Yes



Transport Bag for 2 Stands 1 m

SHOWGEAR

E840002 Suitable for 2 stands, distance poles or 100 cm LED bars

Length (mm): 1150 mm
 Height (mm): 90 mm
 Width (mm): 180 mm
 Retractable Handle: Yes




Transport Bag for Wentex Base Plate

SHOWGEAR

E840003 35x30 cm (LxW)

Length (mm): 380 mm
 Height (mm): 25 mm
 Width (mm): 320 mm
 Inner Length: 350 mm
 Inner Height: 10 mm
 Inner Width: 300 mm
 Retractable Handle: Yes
 Accessories Pocket: Yes

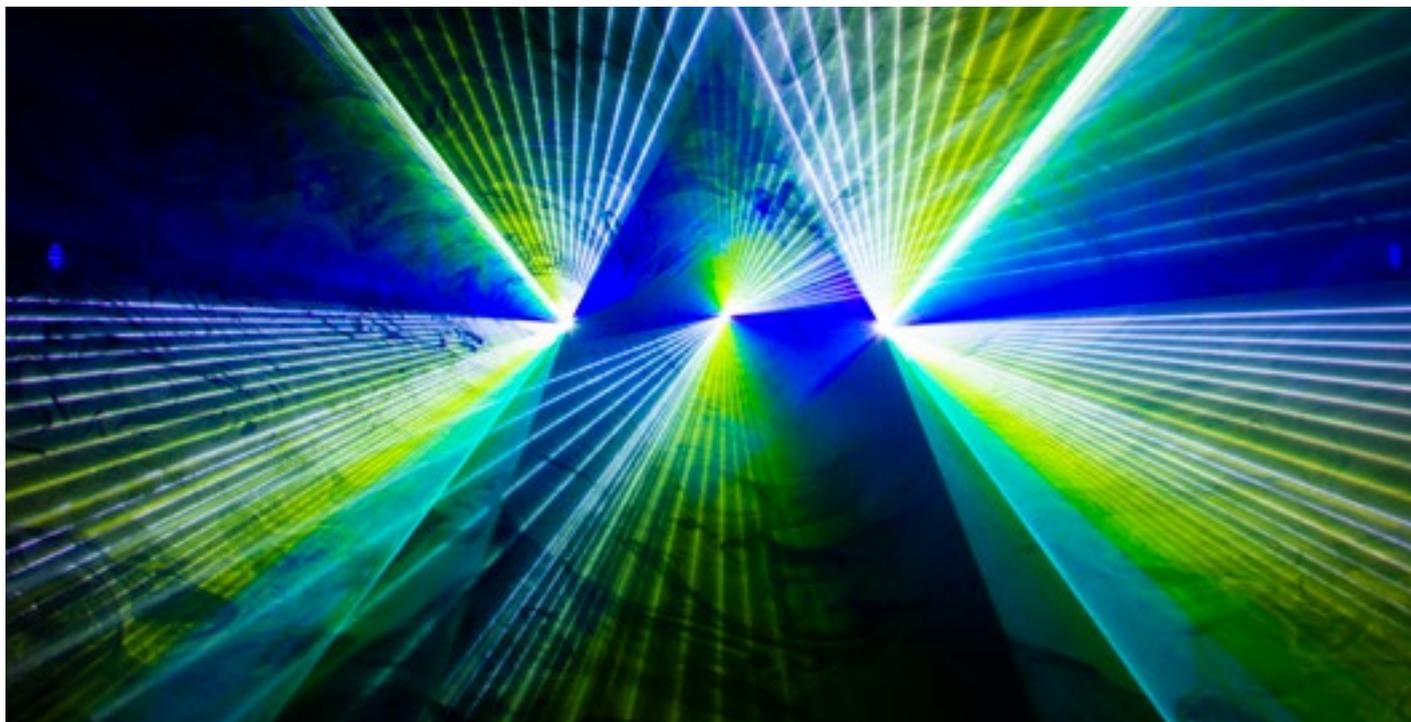

Vestastraat 2
6468 EX Kerkrade
The Netherlands

☎ +31 - (0)45 - 5667701

✉ sales@highlite.com

www.highlite.com



showtec

&infinity

DMM
DUTCH MEDIA TOOLS

DAP

ARTECTA

SHOW
GEAR