



# SOUND & LIGHT

SOLUTIONS

SYNQ  
AUDIOPHONY  
AUDIOPHONY-PA  
BRITEQ  
CONTEST  
CONTESTAGE  
JB-SYSTEMS  
HILEC  
JVCASE

2020 — EDITION

BEGLEC  
HITMUSIC



# EDITO

**We are pleased to present you our new 2020 catalogue.**

**It's already 3 years that BEGLEC and HITMUSIC have joined forces!**

**This alliance is positively reflected in our new global offer, you can see that each brand specializes and that our product lines are more and more clear.**

**Whether you are a shop, an installer, a service provider or a distributor, our brands bring you more and more solutions adapted to your needs.**

**The BEGLEC HITMUSIC group is a team of 65 people working together!**

**Enjoy your reading!**

**Luc de BAUW**

Director BEGLEC - Partner

**Pierre DENJEAN**

President HITMUSIC - Partner

**Marc de BAUW**

Associate



# WHERE ARE WE?



# 9

## EXCLUSIVE BRANDS

# 65

## PEOPLE AT YOUR SERVICE

# 1830

## PRODUCTS REFERENCED IN THIS CATALOGUE

### **HIT MUSIC SAS**

Parc d'Activités Cahors Sud  
En Teste  
46230 FONTANES  
France  
Tel. : +33 (0)5 65 21 50 00  
contact@hitmusic.eu

### **OPENING HOURS**

Monday → Friday  
9:00 to 12:00 & 13:15 to 17:15


### **BEGLEC NV**

't Hofveld 2c  
Industriezone "Gosset"  
B-1702 Groot-Bijgaarden  
Belgique  
Tel. : +32 (0)2 481 70 70  
orders@beglec.com


### **OPENING HOURS**

Monday → Friday  
8:30 to 12:15 & 13:00 to 17:00

# SUMMARY




**P6**  
SOUND



**P74**  
PORTABLE SOUND




**P82**  
COMMERCIAL AUDIO



**P112**  
LIGHT INTEGRATION




**P134**  
LIGHT




**P206**  
EFFECT MACHINES



**P216**  
FLIGHT-CASES



**P224**  
TRUSS



**P264**  
ACCESSORIES

09:49 Jeu. 16 janv.

**Audiophony**  
EQUIPEMENTS

DEVICE  
SCENES

OFFLINE/DEMO



HOME



SCENES

SETUP

REV OUTPUT

CH1 2.4

CH2 6.9

CH3 6.9

CH4 6.7

CH5/6 6.1

CH7/8 3.6

0 10 name

1 REV-PLATE

2 REV-PLATE2

3 REV-ROOM

4 REV-ROOM2

5 REV-HALL

6 REV-HALL2


7 CHROUS

8 FLANGE

-7.1dB


REV

MASTER

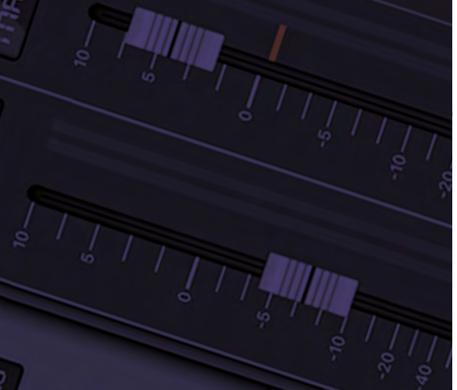

# SOUND

COLUMN ARRAY ILINE  
MOJO SOUND SYSTEM  
ACTIVE SPEAKERS  
PASSIVE SPEAKERS  
SUBWOOFERS  
AMPLIFIERS  
SOUND PROCESSING  
MIXING DESKS  
CD PLAYERS  
TURNTABLES  
MICROPHONES  
UHF410 RANGE  
GO RANGE  
HEADPHONES

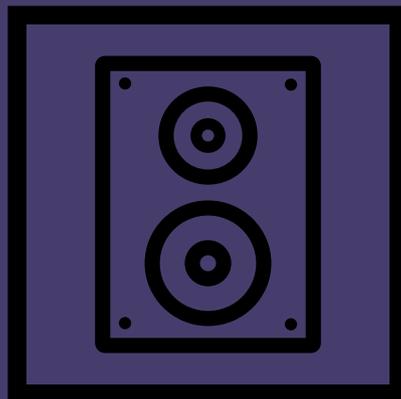

# ILINE COLUMN ARRAY

Complete iLINE COLUMN ARRAY set



## “Column Array” column systems

Aesthetically pleasing, the system comes with 2 families of columns. One for installation with columns iLINE23, iLINE43, iLINE83, and the other for stage performance with the iLINE83B model.

They are linked and powered by an active subwoofer, the iLINEsub12A which embeds a double amplification of 700W/5 Ohms in class D for the columns and 700W/4 Ohms for the lower part because we can also add the iLINEsub12A as a reinforcement, which is the passive version of the subwoofer.



Go to dedicated website :  
[iline-series.audiophony.com](http://iline-series.audiophony.com)


## Modulate your desires.

Whether for mobile or fixed use, the system answers all your problems.

The system offers multiple possible combinations, for example, 2 columns, 1 subwoofer or 2 subwoofers, 2 columns, etc.

Once controlled by an active subwoofer, the iLINEsub12P passive subwoofers can supply the satellites for numerous configurations.



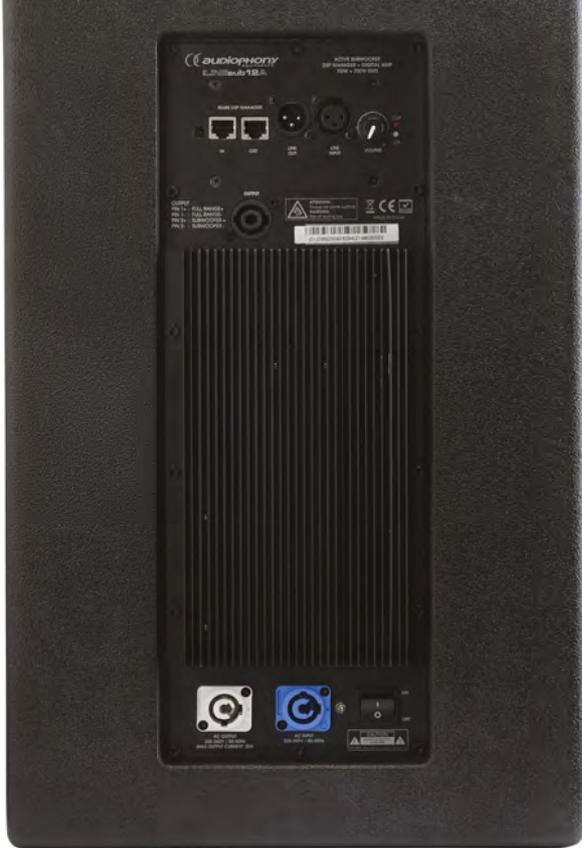

## A system that travels well.

Lightweight and robust, the subwoofers are made of a very resistant wood, Finnish birch multi-ply plywood with a protective polyurethane resin coating, which is very resistant to scratches.

You can transport your entire iLINE system anywhere.

## Touch the power, that's all!

If you want to touch the system's sound settings, an "iLINEbox" USB to RJ45 converter is sold separately. This box is needed if you want to adjust the built-in DSP.

The native DSP is preset to factory settings in order to ensure optimal system behaviour.



Only compatible with Windows

Available in black or white finish for service or installation.



# ILINE COLUMN ARRAY

Discover the different configurations available to purchase.



## iLINE

Stereo configuration 2.1 - 1020W RMS

Code : H10879



- 2x iLINE83 (H10756)
- 2x iLINEsub12A (zH10761)
- 1x iLINEbox (H10762)
- 2x CAB-200 (H8245)
- 2x CSP215/6 (H9841)



## iLINE

Mono configuration 510W RMS

Code : H10880



- 1x iLINE83B (H10758)
- 1x iLINEspace60 (H10759)
- 1x iLINEsub12A (H10761)
- 1x iLINEbox (H10762)



## iLINE

Stereo configuration 2040W RMS

Code : H10881



- 4x iLINE83B (H10758)
- 2x iLINEsub12P (H10763)
- 2x iLINEsub12A (H10761)
- 2x iLINEcord60 (H10764)
- 1x iLINEbox (H10762)



## iLINE

Mono configuration 1020W RMS

Code : H10882



- 2x iLINE83B (H10758)
- 1x iLINEspace60 (H10759)
- 1x iLINEbase (H10760)
- 1x iLINEsub12P (H10763)
- 1x iLINEsub12A (H10761)
- 1x iLINEcord60 (H10764)
- 1x iLINEbox (H10762)
- 1x CSP215/3 (H9840)

**The RJ45 cord that connects the iLINEbox to the iLINEsub12A is not supplied.**

See the LINK-RJ cords in accessories section  
Available in multiple lengths





### iLINE

Stereo installation combination - 2680W RMS

Code : H10883



- 8x iLINE83 (H10756)
- 8x iLINE83sup (H10757)
- 2x iLINEsub12P (H10763)
- 2x iLINEsub12A (H10761)
- 2x iLINEcord60 (H10764)
- 1x iLINEbox (H10762)
- 2x CSP215/3 (H9840)



### iLINE

Stereo installation combination - 940W RMS

Code : H10884



- 4x iLINE43 (H10754)
- 4x iLINE24sup (H10773)
- 2x iLINEsub12A (H10761)
- 1x iLINEbox (H10762)



### iLINE

Mono installation combination - 510W RMS

Code : H10885



- 4x iLINE23 (H10752)
- 4x iLINE23sup (H10753)
- 1x iLINEsub12A (H10761)
- 1x iLINEbox (H10762)



# ILINE COLUMN ARRAY



**iLINE83B**  
160W @ 16 Ohms column with 8 3-inch speakers - with stackable connector base

Code : H10758




**iLINE83**  
160W @ 16 Ohms column with 8 3-inch speakers for installation

Code : H10756




**iLINE83sup**  
Wall bracket for iLINE83 column

Code : H10757




**iLINE43**  
80W @ 8 Ohms column with 4 3-inch speakers for installation

Code : H10754




**iLINE43sup**  
Wall bracket for iLINE43 column

Code : H10755




**iLINE23**  
40W @ 16 Ohms column with 2 3-inch speakers for installation

Code : H10752




**iLINE23sup**  
Wall bracket for iLINE23 column

Code : H10753




**iLINE24sup**  
Adjustable wall bracket for iLINE23 and iLINE43

Code : H10773



	<b>iLINE23</b>	<b>iLINE43</b>	<b>iLINE83</b>	<b>iLINE83B</b>	<b>iLINEsub12A</b>	<b>iLINEsub12P</b>
Power	40W RMS / 80W Max	80W RMS / 160W Max	160W RMS / 320W Max	160W RMS / 320W Max	700+700 W RMS / 4Ω	400W RMS / 800W Max
Frequencies	135 Hz / 17 kHz	135 Hz / 17 kHz	135 Hz / 17 kHz	135 Hz / 17 kHz	50 Hz / 200 Hz	50 Hz / 200 Hz
Sensitivity	89 dB / 108 dB max	92 dB / 114 dB max	95 dB / 120 dB max	95 dB / 120 dB max	96 dB / 124 dB max	96 dB / 125 dB max
Impedance	16Ω	8Ω	16Ω	16Ω	8Ω	8Ω
Speakers	2x3"	4x3"	8x3"	8x3"	12"	12"
Dispersion HxV	115° / 20°	115° / 20°	115° / 20°	115° / 20°	-	-
Dimensions	110x180x148 mm	110x350x148 mm	110x690x148 mm	110x770x148 mm	350x515x490 mm	350x515x490 mm
Weight	2.2 Kg	4 Kg	7.6 Kg	7.6 Kg	23.5 Kg	22 Kg



**iLINEsub12P**  
12-inch passive subwoofer - 400W - 8 Ohms

Code : H10763



**iLINEsub12A**  
12-inch active subwoofer 700W + 700W with built-in DSP

Code : H10761



**iLINEspace60**  
Increase height by 60cm for iLINE83B with stackable connector base

Code : H10759



**iLINEbase**  
Floor bracket for iLINE83B and iLINESPACE60

Code : H10760



**iLINEcord60**  
Speakon cord/Speakon 60cm for iLINE series

Code : H10764



**iLINEbox**  
USB → RJ45 converter for DSP of iLINEsub12A

Code : H10762



**iLINEbag**  
Carrying bag for 2 iLINE 8 HP columns or 2 iLINEspace 60

Code : H10767



**iLINEcov**  
Protective cover for iLINE series subwoofers

Code : H10768



More information on  
[www.iline-series.audiophony.com](http://www.iline-series.audiophony.com)

# ILINE COLUMN ARRAY



**iLINE83Bw**  
160W @ 16 Ohms column with 8 3-inch speakers - with stackable connector base

---

Code : H10939

---




**iLINE83w**  
160W @ 16 Ohms column with 8 3-inch speakers for installation

---

Code : H10938

---




**iLINE83sup/w**  
Wall bracket for iLINE83 column

---

Code : H10940

---




**iLINE43w**  
80W @ 8 Ohms column with 4 3-inch speakers for installation

---

Code : H10936

---




**iLINE43supw**  
Wall bracket for iLINE43 column

---

Code : H10937

---




**iLINE23w**  
40W @ 16 Ohms column with 2 3-inch speakers for installation

---

Code : H10934

---




**iLINE23supw**  
Wall bracket for iLINE23 column

---

Code : H10935

---




**iLINE24supw**  
Adjustable wall bracket for iLINE23 and iLINE43

---

Code : H10945

---



	<b>iLINE23w</b>	<b>iLINE43w</b>	<b>iLINE83w</b>	<b>iLINE83Bw</b>	<b>iLINEsub12Aw</b>	<b>iLINEsub12Pw</b>
Power	40W RMS / 80W Max	80W RMS / 160W Max	160W RMS / 320W Max	160W RMS / 320W Max	700+700 W RMS / 4Ω	400W RMS / 800W Max
Frequencies	135 Hz / 17 kHz	135 Hz / 17 kHz	135 Hz / 17 kHz	135 Hz / 17 kHz	50 Hz / 200 Hz	50 Hz / 200 Hz
Sensitivity	89 dB / 108 dB max	92 dB / 114 dB max	95 dB / 120 dB max	95 dB / 120 dB max	96 dB / 124 dB max	96 dB / 125 dB max
Impedance	16Ω	8Ω	16Ω	16Ω	8Ω	8Ω
Speakers	2x3"	4x3"	8x3"	8x3"	12"	12"
Dispersion HxV	115° / 20°	115° / 20°	115° / 20°	115° / 20°	-	-
Dimensions	110x180x148 mm	110x350x148 mm	110x690x148 mm	110x770x148 mm	350x515x490 mm	350x515x490 mm
Weight	2.2 Kg	4 Kg	7.6 Kg	7.6 Kg	23.5 Kg	22 Kg



**iLINEsub12Pw**  
12-inch passive subwoofer - 400W - 8 Ohms

Code : H10944



**iLINEsub12Aw**  
12-inch active subwoofer 700W + 700W with built-in DSP

Code : H10943



**iLINEspace60w**  
Increase height by 60cm for iLINE83B with stackable connector base

Code : H10942



**iLINEbasew**  
Floor bracket for iLINE83B and iLINESPACE60

Code : H10941



**iLINEcord60**  
Speakon cord/Speakon 60cm for iLINE series

Code : H10764



**iLINEbox**  
USB → RJ45 converter for DSP of iLINEsub12A

Code : H10762



**iLINEbag**  
Carrying bag for 2 iLINE 8 HP columns or 2 iLINEspace 60

Code : H10767



**iLINEcov**  
Protective cover for iLINE series subwoofers

Code : H10768



More information on  
[www.iline-series.audiophony.com](http://www.iline-series.audiophony.com)

# MOJO1042APP

All in one active systems with mixer and app

## Compact, light, powerful.

The MOJO1042APP is a concentrate of technology and innovation. It is a modular triphonic system with a power of 1020 W for a weight of only 18 Kg. It is equipped with a complete 5-way control mixer, Bluetooth®. DSP multi-effect, integrated in the cabinet with all the standards of connectivity for professional and consumer use.

## Flexibility.

Our very smart system allows you to easily amplify and connect satellites directly onto the subwoofer, without any linking cable. This is only one of many possibilities to configure your MOJO1042APP sound system according to the location, audience, mono or stereo needs, and other parameters thanks to the supplied accessories.



View of the new mixer.





**NEW**

**MOJO1042APP**  
Syst actif 2.1 - 1020W + DSP + App

---

Code : H10982

---



**COV-MOJO1042APP**  
Travel bag + trolley for MOJO1042APP

---

Code : H10350

---

Power: 160 W max. (x2) the satellites + 700W max. the cabinet
Frequency response: 50Hz - 22KHz
SPL max. (@1m) : 120dB
Boomer: 4.75" for the satellite + 1 x 10" for the subwoofer
Tweeter: 1" compression
Dispersion : 90° x 45° (HxV)
Connectors : - CH1/4 : Combo XLR/Jack Micro/Guitar/Line - CH5/6 : Ligne Jack 6.35 L/R + RCA - CH7/8 : Jack 3.5 stéréo AUX + Bluetooth®
Settings : - Volume - DSP and contour per channel - Cabinet volume - Balance - Master
Multi-effects DSP: Reverb Plate/Plate2/Room/Room2/Hall/Hall2/Chorus/Flange.
IPAD app «MOJControl» level control, Parametric EQ, Multi-effects, and Compressor per channel, Graphic output EQ, Master, Balance, SUB Level.
Dimensions : (225 x 140 x 110 mm) x 2 for the satellites, 345 x 450 x 400 mm for the cabinet.
Net Weight: 3.8 Kg + 14.5 Kg

## Ergonomic and smart.

We reserved storage compartments in the back of the subwoofer for the two satellites, ensuring you a safe and very handy transport.



## MojoControl.

The MojoControl app for Apple iPad allows you to take control of the system's mixer.

You can set and customize each channel, adjust the curve with the parametric equalizer, choose the type of effect and record scenes.



# THE MOJO RANGE



## An incredible sound.

The 6 loudspeakers 3" and the 1" motor of the column allow a dispersion of 120° horizontally and 30° vertically.

This asymmetrical diffusion avoids reflection phenomena and therefore optimizes rendering even in difficult configurations

## Easy to use

Lightweight and robust, subwoofer is made of high-strength wood, plywood Finnish birch with a protective polyurea resin coating that is highly resistant to scratches. You can transport your entire MOJO1200Line system anywhere.

The columns are easy to assemble and disassemble thanks to their stacking system. In addition, to simplify your life, all the amplification is integrated into the MOJO1200Line housing and the connection of the amplification module is clear and precise.

## A setup for each configuration

The MOJO1200Line offers the possibility to adjust your sound to your desires. You can choose between 3 factory presets and 5 user presets. They are easy to set up and use.





## Feel the power with TWS Bluetooth®.


Discover the “True Wireless Stereo” technology. Send music from your mobile to the MOJO1200Line.

Thanks to the “True Wireless Stereo” technology, it will transmit the Bluetooth audio signal to a second MOJO and you will enjoy the Stereo mode!



### Comes with bags!

Protect your MOJO1200Line with Audiophony covers. They are made of high quality nylon and include carrying handles and a zipper system.

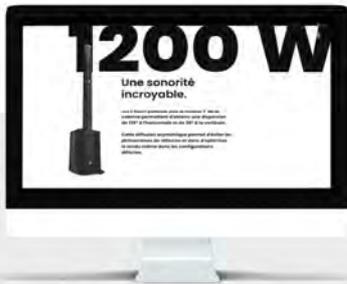

Go to dedicated website : [mojo1200line.audiophony.com](http://mojo1200line.audiophony.com)

Column	Subwoofer	Complete system	Amplifier
Power: 180W RMS - 360W max.	Power: 250W RMS - 500W max.	Frequency response: 38 - 18000 Hz	Power: 2 x 600W max
Nominal impedance: 6 Ohms	Nominal impedance: 4 Ohms	SPL max. (@1m): 122 dB	
Boomer: 6x3 inch	Boomer: 1x 10 inch		<b>Input:</b>
Tweeter: 1x1 inch	Dimensions: 366 x 625 x 541 mm		- CH1: 1 x XLR/Line Jack/Mic Combo
Dispersion: 120° x 30° (HxV)	Net weight: 21 kg		- CH2: 1 x XLR/Line Mic/Jack Combo
Connector: Insert in housing			- CH3: 1 x Line jack balanced
Dimensions: 108 x 835 x 98 mm x2			- CH4/5: 1 x RCA L/R line + Bluetooth® input
Net weight: 3.9 kg			
			<b>Output:</b>
			- 1 Insert on the top of the housing for the column
			- 1x XLR MIX OUT balanced for output to another system
			- 2x XLR LINE OUT symmetrical for the CH1 and 2 replicate
			<b>DSP :</b>
			24 bits (1 in 2 out)
			EQ / Presets / low cut / Delay / Bluetooth® TWS
			Level: Level adjustment on each channel + Master

# MOJO500LINE

Active subwoofer and column system + mixer with 1 Bluetooth® input

## The Almighty featherweight - 500 W

This sound system will amaze you by its presence. We calculated the position of each driver in the column so that everyone around can enjoy your music. Last but not least, the built-in compressor allows a best sound recording from your microphones and better performances. The whole system is easy to transport as it only weighs less than 15 kg!

- + 3-channel mixer with Bluetooth® input
- + Wide-angle column
- + Beautiful vocals and good bass rendering



### MOJO500LINE

Active system subwoofer and column + mixer with 1 Bluetooth® input

Code : H10529

 **audiophony**  
EQUIPMENT



### COV-MOJO500LINE

Protective cover for MOJO500LINE & MOJO500liberty

Code : H10867

 **audiophony**  
EQUIPMENT

 **Bluetooth™**



# MOJ0500LIBERTY

500W compact active audio system for all types of applications.

The MOJ0500LIBERTY is an evolution of the already famous MOJ0500LINE.

It retains the same power, the same diffusion technology, the same protections and the same dimensions.

One of the evolutions is found in a brand new ultra-complete mixing desk with reverb, Bluetooth® and all available connector formats. But the major evolution is the contribution of a Panasonic battery allowing an operating autonomy ranging from 5 to 15 hours depending on use.



Very complete 6-channel mixer with 2 microphone inputs, 3 line inputs, 1 Auxiliary and 1 Bluetooth®. Reverb effect adjustable on the microphone and instrument channels.



Battery Lithium PANASONIC®  
DC 28.8V / 5800mAh




**MOJ0500LIBERTY**  
Active system subwoofer and column + mixer  
+ battery + reverb with 1 Bluetooth® input

Code : H10899



Power rating: 200W max for the column + 300W max for subwoofer
Frequency response: 50Hz -22KHz
SPL max. (@1m) : 116 dB
Woofer: 6 x 2.75" for the column + 1x8" for the subwoofer
Dispersion : 120° x 20° (HxV)
Connectors: 2x Combo Mic/Line + 1x RCA Line et 1x 3.5 Jack Line
Bluetooth® receiver on channel 3
Adjustments: Volume by channel + general Treble/Bass
Dimensions: (80 x 80 x 830 mm) x2 for the column and support 340 x 430 x 400 mm for the subwoofer
Net weight: 3.65 kg + 10.8 kg (12,6 kg for MOJ0500Liberty)

# ATOM ACTIVE SPEAKERS



Go to dedicated website :  
[atom.audiophony.com](http://atom.audiophony.com)

The ATOM series is equipped with a simple DSP and is easy to use. It allows you to adjust and configure your speaker to the required use with the touch of a button. The internal processor's different presets adapt your speaker to the current use (front, backstage, etc.) but also the current sound application (DJ, Live, Speech, etc.) without forgetting the ability to correct bass and treble +/- 10dB in order to compensate for a room's acoustic problems, for example.

Each ATOM speaker offers two inputs and one output, a large choice of connectivity in order to connect all kinds of sources at Micro or Line level.



The design of this new series provides usage flexibility and exceptional installation thanks to M10 attachment points, backstage position and an ingenious 35mm double position base allowing the speaker to be used on a stand in a straight or inclined position of 7.5° downwards.






**ATOM15A**  
15-inch active speaker with DSP

---

Code : H10781

---




**ATOM12A**  
12-inch active speaker with DSP

---

Code : H10780

---




**ATOM10A**  
10-inch active speaker with DSP

---

Code : H10779

---




**COV-ATOM15A**  
Protective cover for ATOM15A

---

Code : H10786

---

**COV-ATOM12A**  
Protective cover for ATOM12A

---

Code : H10785

---

**COV-ATOM10A**  
Protective cover for ATOM10A

---

Code : H10784



**ATOM18ASUB**  
18-inch active subwoofers with DSP

---

Code : H10783

---




**ATOM15ASUB**  
15-inch active subwoofers with DSP

---

Code : H10782

---




**COV-ATOM18ASUB**  
Protective cover for ATOM18ASUB

---

Code : H10788

---

**COV-ATOM15ASUB**  
Protective cover for ATOM15ASUB

---

Code : H10787

	<b>ATOM15A</b>	<b>ATOM12A</b>	<b>ATOM10A</b>
CODE	H10781	H10780	H10779
Total power	400 W RMS - 1600 W DYNAMIC	400 W RMS - 1600 W DYNAMIC	300 W RMS - 1200 W DYNAMIC
Amplification class	D + AB	D + AB	D + AB
Power supply	SMPS switched-mode	SMPS switched-mode	SMPS switched-mode
Protection	Limiter, thermal and short-circuit	Limiter, thermal and short-circuit	Limiter, thermal and short-circuit
Frequency response	45 Hz to 20 kHz	50 Hz to 20 KHz	60 Hz to 20 kHz
Dispersion H x V	90° x 60°	90° x 60°	90° x 60°
SPL pressure	124 dB max	123 dB max	121 dB max
Woofer	15" of 3" coil	12" of 3" coil	10" of 2.5" coil
Tweeter	1.35"	1.35"	1"
Pre-amplification	1 MIC/LINE input on XLR/Jack Combo 1 LINE Input on RCA and 3.5 Jack	1 MIC/LINE input on XLR/Jack Combo 1 LINE Input on RCA and 3.5 Jack	1 MIC/LINE input on XLR/Jack Combo 1 LINE Input on RCA and 3.5 Jack
	Line output on XLR		
	Volume adjustment per channel		
DSP	Equalisation presets: Normal, Live, Club and Speech Position presets: feet, feedback, wall Treble and bass graphic equaliser		
Dimensions (H x W x D)	730 x 425 x 415 mm	628 x 365 x 355 mm	531 x 310 x 300 mm
Net weight	20.6 kg	17.3 kg	11.3 kg

# SÉRIE SR

Robustesse, Puissance, Excellence

Resistant, Powerful, Outstanding



# 2-way passive or active speakers



## Outstanding

No matter how hard you push it, the SR series will provide a balanced, dynamic output. These very powerful speakers have an outstanding sound quality, without any distortion even at full power.

## Powerful

The incredible SR speakers sound output comes from a D and AB bi-amplification up to 400W RMS, with an outstanding 124 dB SPL.



## Resistant

The SR speakers were designed and built for intensive live performances. They are light, robust, and very handy. The 7.5mm HPP housing guarantee an unrivaled solidity.

The SR Series settings meet two specific criteria: simplicity and efficiency. You can access the volume, equalization or operating controls from the dedicated rear panel.



# SR ACTIVE SPEAKERS

The SR series speakers have been designed for multi-purpose and intensive use. The four Presets offer effective protection and settings for all kinds of uses whether at the front, backstage, DJ set or Live.



**SR15A**  
Amplified 2-channel speaker - Bass reflex  
400 Watts RMS

---

Code : H10159

---




**SR12A**  
Amplified 2-channel speaker - Bass reflex  
400 Watts RMS

---

Code : H10158

---




**SR10A**  
Amplified 2-channel speaker - Bass reflex  
300 Watts RMS

---

Code : H10157

---




**COV-SR15**  
Cover for SR15A speaker

---

Code : H10169

---




**COV-SR12**  
Cover for SR12A speaker

---

Code : H10168

---




**COV-SR10**  
Cover for SR10A speaker

---

Code : H10167

---




	SR15A	SR12A	SR10A
CODE	H10159	H10158	H10157
Total power	400 W RMS - 800 W MAX	400 W RMS - 800 W MAX	300 W RMS - 600 W MAX
Amplification class	D + AB		
Power supply	SMPS switched-mode		
Protection	Limiter, thermal and short-circuit		
Frequency response	40 Hz to 20 kHz	45 Hz to 20 KHz	55 Hz to 20 kHz
Dispersion H x V	90° x 60°	90° x 60°	90° x 60°
SPL pressure	124 dB max	123 dB max	121 dB max
Woofer	15" of 3" coil	12" of 3" coil	10" of 2.5" coil
Tweeter	1.35"	1.35"	1"
Pre-amplification	1 MIC/LINE input on XLR/Jack Combo Line output on XLR General volume adjustment Flat, Live, DJ and Vocal equalisation presets		
Dimensions (H x W x D)	410 x 450 x 710 mm	360 x 400 x 630 mm	310 x 335 x 530 mm
Net weight	21.1 kg	19.2 kg	13.4 kg

# SX ACTIVE SPEAKERS

SX speakers are professional and multi-purpose. The choice of components combined with bi-amplification brings a rich and precise sound. The input connector is linked with an optional Bluetooth module that allows easy use with a smartphone or tablet.




**SX15A**  
300W 15-inch 2-channel active speaker

---

Code : H10778

---




**SX12A**  
300W 12-inch 2-channel active speaker

---

Code : H10777

---




**SX-BT**  
Bluetooth module for SX speaker

---

Code : H10886

---




**COV-SX15A**  
Protective cover for SX15A

---

Code : H10855

---




**COV-SX12A**  
Protective cover for SX12A

---

Code : H10854

---



	<b>SX15A</b>	<b>SX12A</b>
CODE	H10778	H10777
Total power	300 W RMS - 600 W MAX	300 W RMS - 600 W MAX
Amplification class	D	D
Power supply	SMPS switched-mode	SMPS switched-mode
Protection	Limiter, thermal and short-circuit	Limiter, thermal and short-circuit
Frequency response	62 Hz to 19 KHz	65 Hz to 19 KHz
Dispersion H x V	90° x 60°	90° x 60°
SPL pressure	121 dB max	120 dB max
Woofers	15" of 2" coil	12" of 2" coil
Tweeter	1.35"	
Pre-amplification	1 MIC/LINE Input on Combo and RCA Line output on XLR General volume adjustment "Contour" Preset	
Optional module	Bluetooth® receiver 4.0 Pairing, Play/Pause, Skip, Vol buttons	
Dimensions (H x W x D)	630 x 390 x 370 mm	600 x 380 x 340 mm
Net weight	14.5 kg	13.2 kg

# PSA ACTIVE SPEAKERS



- Bi-Amping technology with separate amplifiers
- Active two-channel filter
- 2 balanced MIC inputs + 1 LINE input with level adjustment
- Balanced LINE output
- Adjustment buttons for treble + bass + main volume



**PSA-15**  
15" active professional speaker

Code : B00617



**PSA-12**  
12" active professional speaker

Code : B00616



**PSA-10**  
10" active professional speaker

Code : B00629



**PSA-08**  
8" active professional speaker

Code : B00628



**TOURING BAG -  
PS-15/PSA-15**  
Cover for PS-15/PSA-15

Code : B00597



**TOURING BAG -  
PS-12/PSA-12**  
Cover for PS-12, PSA-12, PPA-121


Code : B00596



	PSA-15	PSA-12	PSA-10	PSA-08
Code	B00617	B00616	B00629	B00628
Total RMS power	245+55 W	165+35 W	130+30 W	120 W
Frequency response	40 Hz to 20 kHz	45 Hz to 20 KHz	60 Hz to 20 KHz	70 Hz to 20 KHz
Dispersion H x V	90° x 60°	90° x 60°	90° x 60°	90° x 60°
Woofer	15"	12"	10 inch	08 inch
Tweeter	1.75"	1.35"	1.35 inch	1 inch
Pre-amplification	1 MIC Input on XLR and RCA 1 LINE Input on RCA and XLR Line Output on XLR and JACK General volume and Mic and Line volume adjustment General Treble and Bass adjustment			
Dimensions (H x W x D)	680 x 470 x 400 mm	588 x 431 x 310 mm	500 x 355 x 270 mm	402 x 294 x 220 mm
Net weight	23.3 kg	17 kg	11.6 kg	8 kg



SC & SQ SERIES

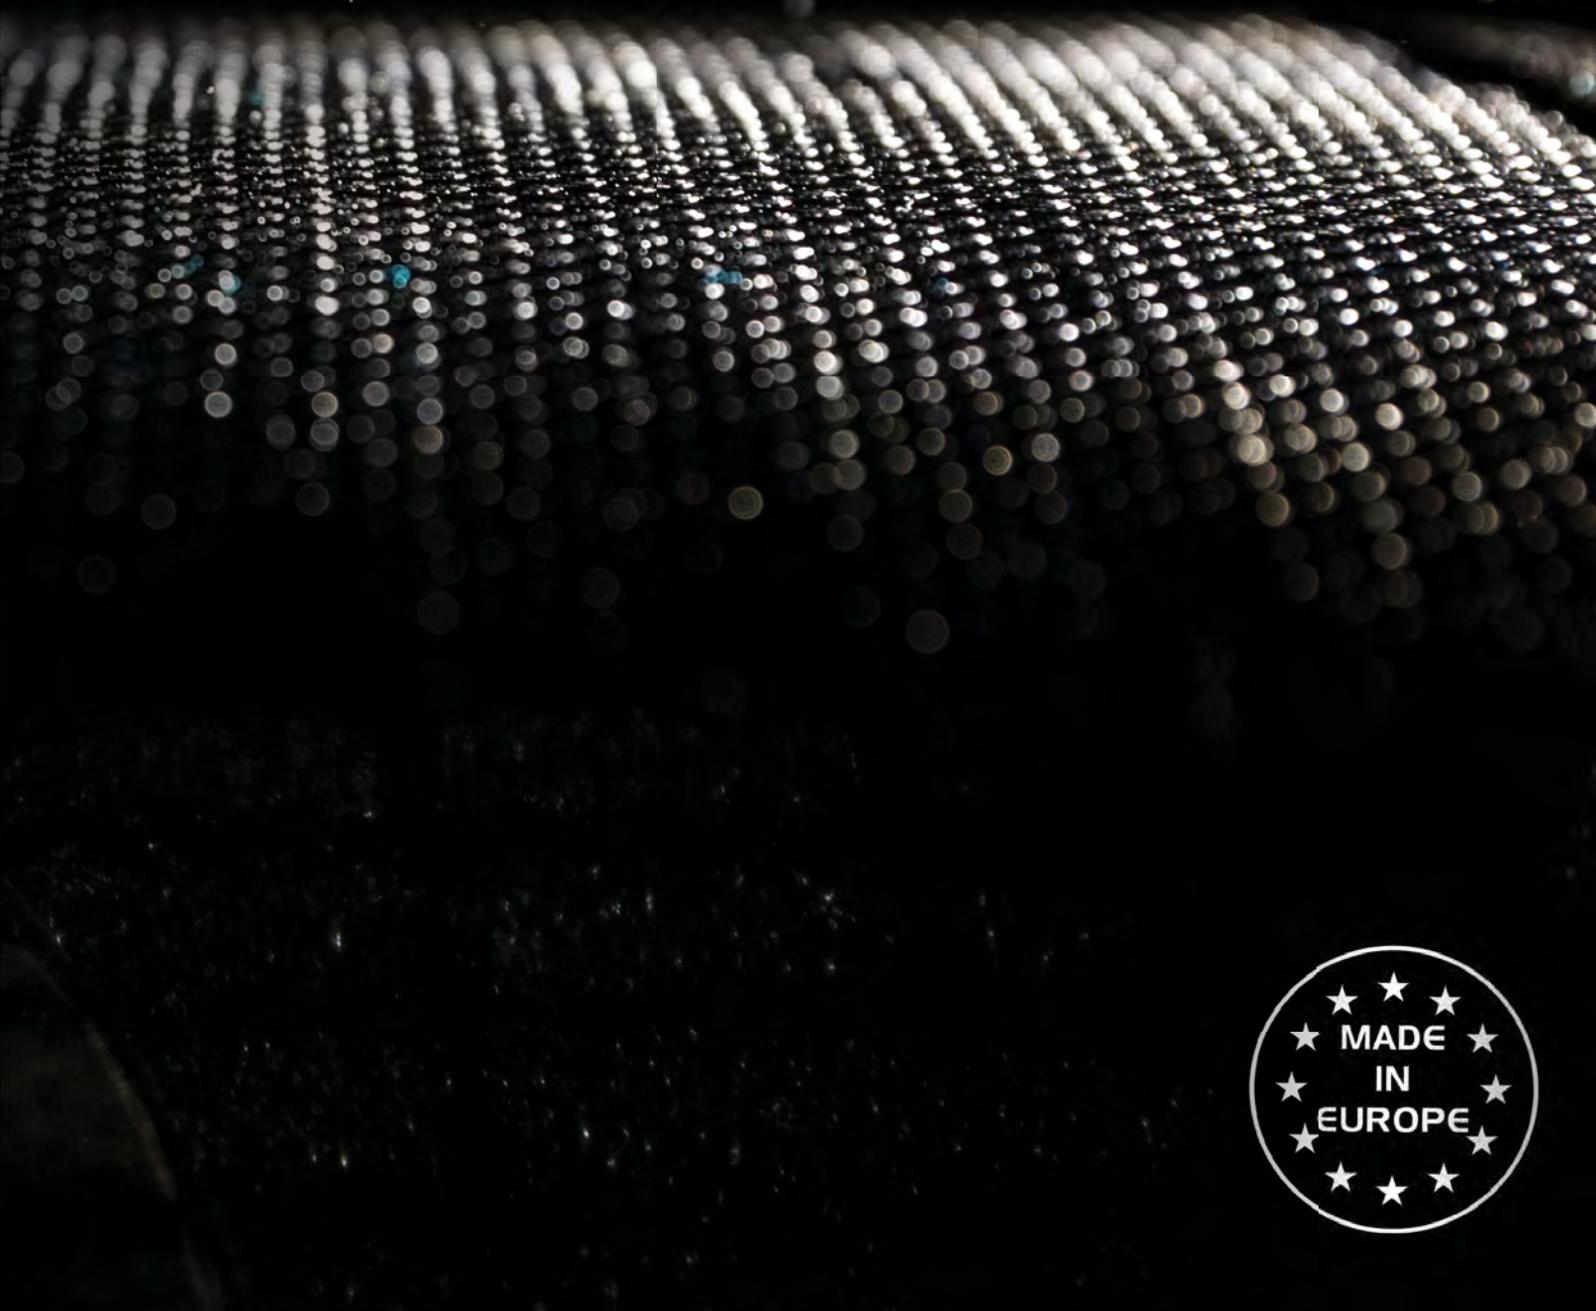

# SC PASSIVE SPEAKERS

- Passive speakers for “high-end” performance
- Designed, developed and manufactured in Europe
- European components assembled in Hi-end coaxial speakers
- High quality Baltic birch plywood and polyurethane with coating of “Chemline” (USA) anti-scratch paint
- Very powerful and excellent performance




**SC-15**  
15" 2-channel 400 W AES speaker

---

Code : B09183

---




**SC-12**  
12" 2-channel 400 W AES speaker

---

Code : B09182

---




**SC-08**  
8" 2-channel 300 W AES speaker

---

Code : B09181

---




**SC-05**  
**SC-05-WHITE**  
5" 2-channel 250 W AES speaker

---

Code : B09180  
Code : B08609 (white)

---




SC-15	SC-12	SC-08	SC-05
2-channel passive filter	2-channel passive filter	2-channel passive filter	2-channel passive filter
15" low frequency speaker with ferrite + 1.45" tweeter (1" coil)	12" low frequency speaker with ferrite + 1.45" tweeter (1" coil)	8" low frequency speaker with ferrite + 1.45" tweeter (1" coil)	5" low frequency speaker with ferrite + 1.75" tweeter (0.75" coil)
3 Speakons	3 Speakons	Speakon in/out 4-pin	Speakon in/out 4-pin + Euroblock 4-pin connector
Switch selection + -1 or + -2	Switch selection + -1 or + -2	Switch selection + -1 or + -2	Switch selection + -1 or + -2
Enclosure in multi-ply Finnish birch	Enclosure in multi-ply Finnish birch	Enclosure in multi-ply Finnish birch + omega fixing hooks	OMEGA® fastening hook
Resistant textured black paint	Resistant textured black paint	Resistant textured black paint	Can be attached to a microphone stand using the U-bracket
Max SPL: 128dB	Max SPL: 128dB	Max SPL: 123dB	Max SPL: 119dB
Bandwidth: 54-19.000Hz (-3dB)	Bandwidth: 60-20.000Hz (-3dB)	Bandwidth: 70-20.000Hz (-3dB)	Bandwidth: 120-21.000Hz (-3dB)
Polarity: 60° x 40°	Polarity: 60° x 40°	Polarity: 90° cone	Polarity: 70° cone
Power rating: 400 W AES (recommend amplifier: 800W RMS)	Power rating: 400 W AES (recommend amplifier: 800W RMS)	Power rating: 300 W AES (recommend amplifier: 600W RMS)	Power rating: 250 W AES (recommend amplifier: 500W RMS)
Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 16 Ω
Dimension : 368x580x447 mm	Size: 351x540x410 mm	Dimensions: 254x420x250 mm	Size: 165x165x165 mm
Weight: 19 kg	Weight: 16 kg	Weight: 8 kg	Weight: 4 kg

Accessories for attachments and flight cases available, see accessories section



# SC & SQ Series

Speakers for "high-end" performance  
Designed, developed and manufactured in Europe  
High quality Baltic birch plywood and polyurethane with coating of  
"Chemline" (USA) anti-scratch paint  
Very powerful and excellent performance

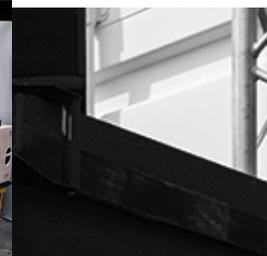

# VIBE PASSIVE SPEAKERS

- Ideal for fixed installations in bars, clubs
- Very solid MDF enclosure
- Covered with metal grid and with acoustic foam inside
- Fibreglass pavilion




**VIBE30 MK2**  
Pro. speaker : 2x 15" - 800 W RMS / 4 Ω

---

Code : B00693

---




**VIBE15 MK2**  
Pro. speaker : 15" - 350 W RMS / 8 Ω

---

Code : B00692

---




**VIBE12MK2**  
Pro. speaker : 12" - 250 W RMS / 8 Ω

---

Code : B00691

---




**VIBE10MK2**  
Pro. speaker : 8" - 200 W RMS / 8 Ω

---

Code : B00690

---




**VIBE8 MK2**  
Pro. speaker : 8" - 150W RMS

---

Code : B00689

---




**CLS-8 II**  
8" compact high power speaker

---

Code : B00630

---






**TOURING BAG**  
Travel bag for Vibe 30

---

Code : B00593

**TOURING BAG**  
Travel bag for Vibe 15

---

Code : B00592

**TOURING BAG**  
Travel bag for Vibe 12

---

Code : B00591

---



VIBE30 MK2	VIBE15 MK2	VIBE12 MK2	VIBE10 MK2	VIBE8 MK2	CLS-8 II
Power rating: 800WRMS	Power rating: 350W RMS	Power rating: 250W RMS	Power rating: 200W RMS	Power rating: 150W RMS	Power rating: 200 WRMS
Impedance: 4 Ω	Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω
Max performance (dB) : 131	Max performance (dB) : 125	Max performance (dB) : 122	Max performance (dB) : 120	Max performance (dB) : 120	Max performance (dB) : 125
Bandwidth (Hz) : 40-20000	Bandwidth (Hz) : 45-20000	Bandwidth (Hz) : 55-20000	Bandwidth (Hz) : 65-20000	Bandwidth (Hz) : 65-20000	Bandwidth (Hz) : 70-20,000
Dimensions (cm) : 116 x 49 x 50.3	Dimensions (cm) : 76 x 47 x 43.5	Dimensions (cm) : 62 x 38.2 x 34.5	Dimensions (cm) : 33 x 51 x 30.2	Dimensions (cm) : 46.5 x 27.7 x 27	Dimensions (cm) : 46.0 x 28.6 x 27.6
Weight (kg) : 50	Weight (kg) : 29	Weight (kg) : 20	Weight (kg) : 15	Weight (kg) : 12	Weight (kg) : 13

# SR PASSIVE SPEAKERS



SR range: excellence in passive solutions.

The SR series loudspeakers are now available in a passive version. They retain all the manufacturing and reproduction qualities of the series. The passive SR speakers are easy to use and very robust to cope with all your performances.

With a power range from 250 to 350W, the SR speakers deliver a powerful, clear and warm sound, suitable for both voice and live or recorded music.




**SR15P**  
15" 300W plastic moulded passive speaker  
- GOA series

---

Code : H10270

---




**SR12P**  
12" 300W plastic moulded passive speaker  
- GOA series

---

Code : H10269

---




**SR10P**  
10" 200W plastic moulded passive speaker  
- GOA series

---

Code : H10268

---




**COV-SR15**  
Cover for SR15A speaker

---

Code : H10169

---




**COV-SR12**  
Cover for SR12A speaker

---

Code : H10168

---




**COV-SR10**  
Cover for SR10A speaker

---

Code : H10167

---



SR15P	SR12P	SR10P
Output power: 300W RMS / 700W max.	Output power: 300W RMS / 700W max.	Output power: 250W RMS / 400W max.
Frequency response: 45 Hz - 20 KHz	Frequency response: 55 Hz - 20 KHz	Frequency response: 65 Hz - 20 KHz
Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω
SPL: 96 dB max.	SPL: 96 dB max.	SPL: 94 dB max.
Dimensions: 410 x 450 x 710 mm	Dimensions: 360 x 400 x 630 mm	Dimensions: 310 x 335 x 530 mm
Net weight: 19.2 Kg	Net weight: 17.8 Kg	Net weight: 11.8 Kg

# PS PASSIVE SPEAKERS



**PS-15**  
15" passive 300Wrms/8Ω speaker

---

Code : B00610

---




**PS-12**  
12" passive 200Wrms/8Ω speaker

---

Code : B00609

---




**PS-10**  
10" passive 160Wrms/8Ω speaker

---

Code : B00627

---




**PS-08**  
8" passive 120Wrms/8Ω speaker

---

Code : B00626

---




**TOURING BAG - PS-15/PSA-15**  
Cover for PS-15/PSA-15

---

Code : B00597

---




**TOURING BAG - PS-12/PSA-12**  
Cover for PS-12, PSA-12, PPA-121

---

Code : B00596

---



PS-15	PS-12	PS-10	PS-08
Output power: 300W RMS / 600W max.	Output power: 200W RMS / 400W max.	Output power: 160W RMS / 320W max.	Output power: 120 W RMS / 240W max.
Frequency response: 45 Hz - 20 KHz	Frequency response: 45 Hz - 20 KHz	Frequency response: 60 Hz - 20 KHz	Frequency response: 70 Hz - 20 KHz
Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω	Impedance: 8 Ω
Dimensions: 680 x 470 x 400 mm	Dimensions: 580 x 420 x 310 mm	Dimensions: 500 x 355 x 270 mm	Dimensions: 402 x 290 x 220 mm
Net weight: 19.8 Kg	Net weight: 13.2 Kg	Net weight: 10.3 Kg	Net weight: 6.6 kg

# ILINE PASSIVE SPEAKERS



**iLINE83**  
160W @ 16 Ohms column with 8 3-inch speakers for installation

Code : H10756



**iLINE83w**  
160W @ 16 Ohms column with 8 3-inch speakers for installation

Code : H10938



**iLINE83sup**  
**iLINE83supw**


Wall bracket for iLINE83 column

Code : H10757 (black)  
Code : H10940 (white)



**iLINE43**  
80W @ 8 Ohms column with 4 3-inch speakers for installation

Code : H10754

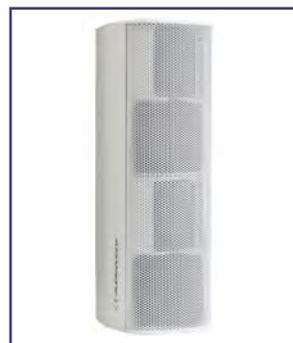

**vziLINE43w**  
80W @ 8 Ohms column with 4 3-inch speakers for installation

Code : H10936



**iLINE43sup**  
**iLINE43supw**

Wall bracket for iLINE43 column

Code : H10755 (black)  
Code : H10937 (white)



**iLINE24sup**  
**iLINE24supw**

Adjustable wall bracket for iLINE23 and iLINE43

Code : H10773 (black)  
Code : H10945 (white)



**iLINE23**  
40W @ 16 Ohms column with 2 3-inch speakers for installation

Code : H10752



**iLINE23w**  
40W @ 16 Ohms column with 2 3-inch speakers for installation

Code : H10934



**iLINE23sup**  
**iLINE23supw**

Wall bracket for iLINE23 column

Code : H10753 (black)  
Code : H10935 (white)



# S SERIES PASSIVE SPEAKERS



**S6**  
Passive 6.5P 80W RMS monitor - black

Code : H9689



**S6W**  
Passive 6.5P 80W RMS monitor - white

Code : H9690



**S8**  
Passive 8P 150W RMS monitor - black

Code : H9691



**S8W**  
Passive 8P 150W RMS monitor - white

Code : H9692



**S10**  
Passive 10P 250W RMS monitor - black

Code : H9693



**S10W**  
Passive 10P 250W RMS monitor - white

Code : H9694



**ISX-10 (pair)**  
Compact 2-channel trapezoidal speaker  
Price for the pair

Code : B00619



**ISX-5 (pair)**  
Compact 2-channel trapezoidal speaker  
Price for the pair

Code : B00618



## Hanging brackets:

SUPS6	Hanging bracket for S6 satellite - black	H9705
SUPS6w	Hanging bracket for S6 satellite	H9706
SUPS8	Hanging bracket for S8 satellite - black	H9707
SUPS8w	Hanging bracket for S8 satellite - white	H9708
SUPS10	Hanging bracket for S10 satellite - black	H9709
SUPS10w	Hanging bracket for S10 satellite - white	H9710

	S6	S8	S10	ISX-10 (UNIT)	ISX-5 (UNIT)
Power	100W RMS / 200W MAX	150W RMS / 300W MAX	250W RMS / 500W MAX	160 W RMS	80 W RMS
Frequency response	80 HZ / 20 KHZ	80 HZ / 19 KHZ	75 HZ / 19 KHZ	100 Hz - 20 Khz	120 Hz - 20 Khz
Sensitivity	93 DB / 118 DB MAX	94 DB / 121 DB MAX	96 DB / 126 DB MAX	116	110
Impedance	8Ω	8Ω	8Ω	8Ω	16Ω
Speakers	6.5"	8"	10"	2X5"	5 INCH
Dispersion HxV	90° / 60°	50-100° / 55°	50-100° / 55°	-	-
Dimensions	222 x 365 x 205 mm	280 x 420 x 233 mm	320 x 530 x 280 mm	400 X 200 X 180 mm	285 X 200 X 180 mm
Weight	6.5 kg	10 kg	14.5 kg	15.5 kg	10.5 kg

# K SERIES PASSIVE SPEAKERS

Tropicalized loudspeaker and aluminum grille for use in humid environments




**K-50/Black (pair)**  
Installation speaker 50 Watts  
2-way - 8 Ohms - Black

---

Code : B00668

---



Power rating: 50 W RMS  
Available power:  
50 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 5.25 inch  
Frequency response: 55 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 238 x 180 x 150 mm  
Net weight: 5 kg  
Price for the pair



**K-50/White (pair)**  
Installation speaker 50 Watts  
2-way - 8 Ohms - White

---

Code : B00669

---



Power rating: 50 W RMS  
Available power:  
50 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 5.25 inch  
Frequency response: 55 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 238 x 180 x 150 mm  
Net weight: 5 kg  
Price for the pair



**K-30/Black (pair)**  
Installation speaker 40 Watts  
2-way - 8 Ohms - Black

---

Code : B00672

---



Power rating: 40 W RMS  
Available power:  
40 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 3.5 inch  
Frequency response: 65 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 170 x 130 x 105 mm  
Net weight: 2.5 kg  
Price for the pair



**K-30/White (pair)**  
Installation speaker 40 Watts  
2-way - 8 Ohms - White

---

Code : B00673

---



Power rating: 40 W RMS  
Available power:  
40 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 3.5 inch  
Frequency response: 65 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 170 x 130 x 105 mm  
Net weight: 2.5 kg  
Price for the pair



**K-80/Black (pair)**  
Installation speaker 85 Watts  
2-way - 8 Ohms - Black

---

Code : B00670

---



Power rating: 85 W RMS  
Available power:  
85 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 8 inch  
Frequency response: 35 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 335 x 270 x 210 mm  
Net weight: 12.8 kg  
Price for the pair



**K-80/White (pair)**  
Installation speaker 85 Watts  
2-way - 8 Ohms - White

---

Code : B00671

---



Power rating: 85 W RMS  
Available power:  
85 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 8 inch  
Frequency response: 35 Hz - 20 kHz  
Attachment: swivel bracket  
Dimensions: 335 x 270 x 210 mm  
Net weight: 12.8 kg  
Price for the pair

# SUBWOOFERS



**ATOM18ASUB**  
600 W RMS - 18-inch active subwoofers with DSP

Code : H10783



**ATOM15ASUB**  
600 W RMS - 15-inch active subwoofers with DSP

Code : H10782



**COV-ATOM18ASUB**  
Protective cover for ATOM18ASUB

Code : H10788



**COV-ATOM15ASUB**  
Protective cover for ATOM15ASUB

Code : H10787



**iLINEsub12P**  
12" passive subwoofer- 400W - 8 Ω

Code : H10763



**iLINEsub12A**  
12" active subwoofer 700W + 700W with built-in DSP

Code : H10761



**iLINEsub12Pw**  
12" passive subwoofer- 400W - 8 Ω

Code : H10944



**iLINEsub12Aw**  
12" active subwoofer 700W + 700W with built-in DSP

Code : H10943



**iLINEbox**  
USB → RJ45 converter for DSP of iLINEsub12A

Code : H10762



**iLINEcov**  
Protective cover for iLINE series subwoofers

Code : H10768



**ATOM-WHEELS**  
4-wheel kit for ATOMSUB subwoofer


Code : H10875



# SUBWOOFERS



- Passive subwoofers for high-end performance
- Designed, developed and manufactured in Europe
- FAITAL brand components with Neodymium magnet, high quality Baltic birch plywood and coating of polyurethane "Chemline" (USA) anti-scratch paint
- 2400W AES

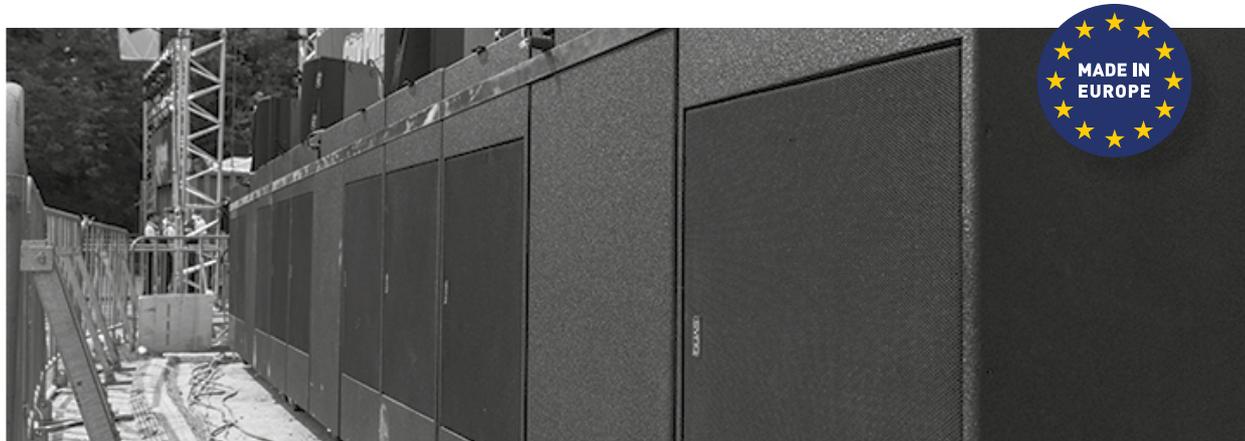


**SQ-218**  
2x 18" 2400W aes subwoofers

---

Code : B09189

---




**SQ-215**  
2x 15" 2400W aes subwoofers

---

Code : B09188

---




**SQ-212**  
2x 12" 2400W aes subwoofers

---

Code : B09187


---




	<b>SQ-218</b>	<b>SQ-215</b>	<b>SQ-212</b>
CODE	B09189	B09188	B09187
Total power	2400 W AES	2400 W AES	2400 W AES
Impedance	4 Ω	4 Ω	4 Ω
Bass frequency limit	25 Hz	30 Hz	35 Hz
SPL pressure	102 dB 1W/1m - 146 dB max	101 dB 1W/1m - 145 dB max	101 dB 1W/1m - 135 dB max
Woofer	2x18" Faital	2x15" Faital	2x12" Faital
Dimensions (H x W x D)	1180 x 800 x 560 mm	800 x 800 x 540 mm	600 x 600 x 400 mm
Net weight	80 kg	60 kg	38.2 kg

More information on: [www.synq-audio.com](http://www.synq-audio.com)

# SUBWOOFERS

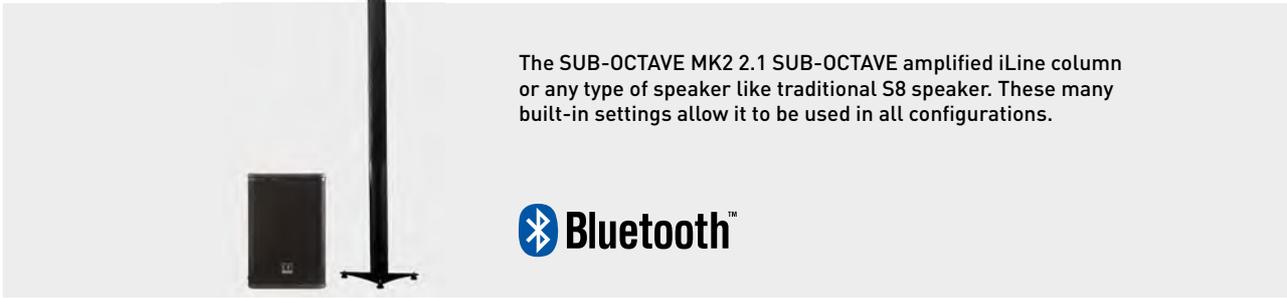

The SUB-OCTAVE MK2 2.1 SUB-OCTAVE amplified iLine column or any type of speaker like traditional S8 speaker. These many built-in settings allow it to be used in all configurations.

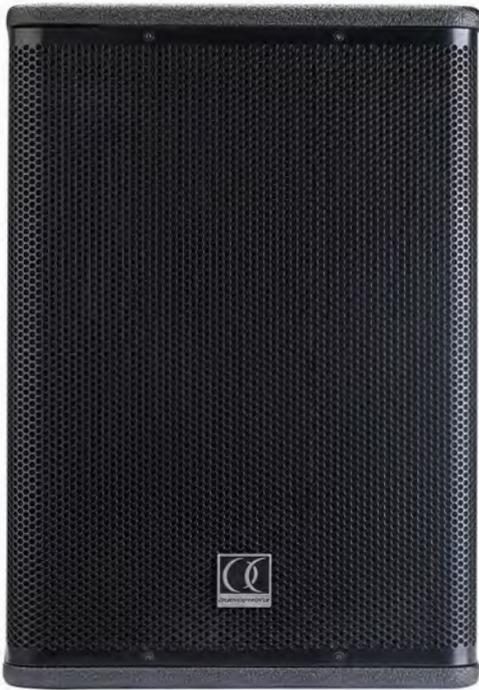

### SUB-OCTAVE MK2

Subwoofer 15" 1000W/80hms + 2x450W/4ohms

Code : H10980



Frequency response : 40 – 20 000 Hz  
Sensitivity (1 W@1m) : 99 dB  
SPL max (1m) : 130 dB  
Boomer : 15 inches 100 mm voice coil

#### AMPLIFIER :

Sub : 1 x 900 W RMS 8 Ohms  
Mid/high : 2 x 450 W RMS 4 Ohms  
2 x 250 W RMS 8 Ohms  
Inputs : 2 x XLR/Jack combo line in  
1 x Bluetooth®  
Outputs : 2 x XLR line level  
2 x Speakon powered Mid/High out  
Volumes : Master level

#### SUB LEVEL :

Sub filter : 40 to 200 Hz X-over with Invert switch  
Mid/High filter : Full range / 80 Hz / 120 Hz switch  
Equalizer : Low +/- 10dB @ 80 Hz  
Mid +/- 10dB @ 2,5 kHz  
High +/- 10dB @ 12 kHz  
Display : Limit / Signal / ON LEDs  
Dimensions : 580 x 405 x 550 mm  
Weight : 35 kg



### COV-SUBOCTAVEMKII

Bag for SUBOCTAVE MKII - Noir

Code : H11131



### RS-218B

Subwoofer equipped with two 18" high power and compact speakers.

Code : B00636



### VIBE18-SUB Mk2

Pro subwoofer: 18" - 600Wrms / 8Ω

Code : B00695



### VIBE15-SUB Mk2

Pro subwoofer: 15" - 400Wrms / 8Ω

Code : B00694



Nominal RMS power: 2x 600W  
Nominal PEAK power: 2x 1200W  
Nominal impedance: 2x 8Ω  
Parallel mode:  
Nominal RMS power: 1x 1200W  
Nominal PEAK power: 1x 2400W  
Nominal impedance: 1x 4Ω  
Frequency response: 35 - 300Hz  
Sensitivity (1W/1m): 104dB  
Max. SPL: 138dB  
Dimensions (WxDxH):  
1200 x 700 x 565 mm  
Weight (net): 84 kg

Power rating: 600W RMS  
Frequency response: 30Hz -250 Hz  
SPL max. (1m) : 131 dB  
Nominal impedance: 8 Ω  
Woofer: 18" aluminium  
Connectors: 2 speakon  
Dimensions: 590 x 736 x 756 mm  
Net weight: 57 kg

Power rating: 400W RMS  
Frequency response: 40Hz -300 Hz  
SPL max. (1m) : 124 dB  
Nominal impedance: 8 Ω  
Woofer: 15" aluminium  
Connectors: 2 speakon  
Dimensions: 440 x 595 x 605 mm  
Net weight: 32.5 kg

# SUBWOOFERS



## TOURING BAG -

### Vibe 15 SUB

Travel bag for Vibe 15 SUB

Code : B00594



## ISX-15S

Subwoofer 15: 2x350Wrms / 2x 4 ohms

Code : B00620



## I-SUB 210

SYNQ high power subwoofer 2 x 10" with very compact design.

Code : B00642



## TOURING BAG -

### Vibe 18 SUB

Travel bag for Vibe 18 SUB

Code : B00595



High-performance protective cover for Series Vibe models.

Power rating: 500 W RMS  
 Frequency response: 50Hz -200Hz  
 SPL 1w/1m : 98 dB  
 Nominal impedance: 8 Ω  
 Woofer: 2x10"  
 Connectors: 2 x speakon  
 Dimensions: 600 x 350 x 410 mm  
 Net weight: 26 kg

High-performance protective cover for Series Vibe models.



## SQ-218 DOLLY

Customised SYNQ trolley for fast and safe SQ subwoofer transport

Code : B09192



## SQ-212 DOLLY

Customised SYNQ trolley for fast and safe SQ subwoofer transport

Code : B09190



## SQ-215 DOLLY

Customised SYNQ trolley for fast and safe SQ subwoofer transport

Code : B09191



## WHEELSET

SYNQ set of wheels for subwoofer Synq (RS and CLS series)

Code : B00637



Custom trolley for fast and safe transportation of SQ subwoofers.  
 Thanks to a special robust mechanism, the trolley adapts easily to the front of the subwoofer to protect it.

# AMPLIFIERS

The heart of playback, performance and durability, exceptional sound quality. Professional and consumer solutions.



### DSPA-1500

2 x 440W @ 8Ω, 2 x 750W @ 4Ω,  
2 x 1200W @ 2Ω

Code : B00275



### DSPA-1000

2 x 300W @ 8Ω, 2 x 500W @ 4Ω,  
2 x 750W @ 2Ω

Code : B00274



### SMi1500

Amplifier with switched-mode power  
supply 2 x 750W @ 4Ω

Code : H9829



### SMi600

Amplifier with switched-mode power  
supply 2 x 300W @ 4Ω

Code : H9827



DSPA-1500



SMi1500

	DSPA-1500	DSPA-1000	SMi1500	SMi600
Power	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω: 2 x 750W</li> <li>4Ω: 2 x 440W</li> <li>2Ω: 2 x 1200W</li> </ul> <ul style="list-style-type: none"> <li>- Bridged mono</li> <li>8Ω: 1 x 1500W</li> <li>4Ω: 1 x 2400W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω: 2 x 500W</li> <li>8Ω: 2 x 300W</li> <li>2Ω: 2 x 750W</li> </ul> <ul style="list-style-type: none"> <li>- Bridged mono</li> <li>8Ω: 1 x 1000W</li> <li>4Ω: 1 x 1500W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω: 2 x 750W</li> <li>8Ω: 2 x 450W</li> <li>2Ω: 2 x 1000W</li> </ul> <ul style="list-style-type: none"> <li>- Bridged mono</li> <li>8Ω: 1 x 1500W</li> <li>4Ω: 1 x 2000W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω: 2 x 300W</li> <li>8Ω: 2 x 200W</li> <li>2Ω: 2 x 450W</li> </ul> <ul style="list-style-type: none"> <li>- Bridged mono</li> <li>8Ω: 1 x 600W</li> <li>4Ω: 1 x 900W</li> </ul>
Type of amplification	Class D	Class D	Class 2H	Class AB
Damping factor	200	200	200	100
Cooling	Front-to-back regulated ventilation			
Connectors	<ul style="list-style-type: none"> <li>- Input: Balanced combo (XLR + TRS jack) connector</li> <li>- Output: Screw-on terminals + 4-pole Speakon®</li> </ul>		<ul style="list-style-type: none"> <li>- Input: XLR + Jack + RCA connectors</li> <li>- Output: Screw-on terminals + 4-pole Speakon®</li> </ul>	
Protections	<ul style="list-style-type: none"> <li>- Against short-circuits</li> <li>- Signal and current limiter</li> <li>- Against voltage deviations</li> <li>- Thermal protection</li> </ul>		<ul style="list-style-type: none"> <li>- Against short-circuits</li> <li>- Current limiter</li> <li>- Against voltage deviations</li> <li>- Immunity to radio frequencies</li> <li>- Thermal protection and regulation</li> </ul>	
DSP	HPF, LPF, PEQ, Q, Limiter, Delays, filters.			
Dimensions (L x W x H)	19" x 2U (482 x 88 x 280mm)		19" x 2U: 483 x 89 x 395mm	
Weight	5.2kg	4.9 kg	9.2 kg	6 kg

# AMPLIFIERS



**DIGIT 3K6**  
2 x 1,800Wrms / 4Ω, class D

Code : B00267



**DIGIT 2K2**  
2 x 1,100Wrms / 4Ω, class D

Code : B00266



**DIGIT 1K0**  
2 x 540Wrms / 4Ω, class D

Code : B00268



DIGIT 1K0

	DIGIT 3K6	DIGIT 2K2	DIGIT 1K0
Power	- RMS stereo 4Ω: 2 x 1800 W 8 Ω : 2 x 1050 W  - Bridged mono 8 Ω : 1 x 3600W	- RMS stereo 4Ω: 2 x 1100 W 8 Ω : 2 x 650 W  - Bridged mono 8 Ω : 1 x 2200W	- RMS stereo 4Ω: 2 x 540 W 8 Ω : 2 x 300 W  - Bridged mono 8 Ω : 1 x 1080W
Type of amplification	Class D	Class D	Class D
Damping factor	300	300	280
Cooling	Front-to-back regulated ventilation		
Connectors	Input + Output : XLR		
Protections	- Against short-circuits - Signal + current limiter - Against overloads - Thermal protection - AC, VHF protection		
Dimensions (L x W x H)	19" x 1 U: 483 x 44 x 301 mm		19" x 1 U: 483 x 44 x 301 mm
Weight	5.6 kg	5.5 kg	3.3 kg

# AMPLIFIERS



## The perfect music of silence

When silence is a very important factor, you can rely on the Ti series which works as silently as possible.

That makes them perfect for studio, permanent installations and theatres.

These Class D amplifiers feature SMPS units and offer a perfect sound reproduction despite their ultra-compact size.

With every connection you need, they're perfectly adapted for any sound system, studio, and even HiFi applications.

They also feature thermal and electronic protections, so you can operate them safely and with great serenity.

		
<p><b>Ti500</b> Class D Amplifier 1 unit 2 x 250W @ 4Ω or 1 x 500W @ 8Ω</p>	<p><b>Ti300</b> Class D Amplifier 1 unit 2 x 150W @ 4Ω or 1 x 300W @ 8Ω</p>	<p><b>Ti154</b> Class D Amplifier 1 unit 4 x 150W @ 4Ω or 2 x 300W @ 8Ω</p>
Code : H9673	Code : H9672	Code : H10412
		

	Ti500	Ti300	Ti154
Power	<ul style="list-style-type: none"> <li>- RMS stereo 4Ω : 2 x 250 W 8 Ω : 2 x 130 W</li> <li>- Bridged mono 8 Ω : 1 x 500W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo 4Ω : 2 x 150 W 8 Ω : 2 x 80 W</li> <li>- Bridged mono 8 Ω : 1 x 300W</li> </ul>	<ul style="list-style-type: none"> <li>4Ω : 4 x 150 W RMS 8 Ω : 4 x 80 W RMS</li> </ul>
Type of amplification	Class D		
Cooling	Silent cooling - Non-ventilated		
Connectors	<ul style="list-style-type: none"> <li>- Input: XLR/Jack combo connectors</li> <li>- Output: 4-pole Speakon® + terminal blocks</li> </ul>		
Protections	<ul style="list-style-type: none"> <li>- Against short-circuits</li> <li>- Signal + current limiter</li> <li>- Against overloads</li> <li>- Thermal protection</li> </ul>		
Dimensions (L x W x H)	19 inches x 1U: 483 x 44 x 330 mm	19 inches x 1U: 483 x 44 x 330 mm	19 inches x 1U: 483 x 44 x 330 mm
Weight	4.7 kg	4.3 kg	4.5 kg



Ti-154

# AMPLIFIERS



## PE-2400

2 x 1,200Wrms / 4Ω, class H

Code : B00265



## PE-900

2 x 450Wrms / 4Ω, class H

Code : B00263



PE-2400



## WA-4X3

4 channel amplifier 4 x 300W RMS @ 4Ω

Code : H9066



WA-4X3

	PE-2400	PE-900	WA-4X3
Power	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω : 2 x 1200 W</li> <li>8 Ω : 2 x 800 W</li> <li>2 Ω : 2 x 1440 W</li> <li>- Bridged mono</li> <li>8 Ω : 1 x 2,400W</li> <li>4Ω : 1 x 2800 W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω : 2 x 450 W</li> <li>8 Ω : 2 x 300 W</li> <li>2 Ω : 2 x 540 W</li> <li>- Bridged mono</li> <li>8 Ω : 1 x 900 W</li> <li>4Ω : 1 x 1080 W</li> </ul>	<ul style="list-style-type: none"> <li>- RMS stereo</li> <li>4Ω : 4 x 300 W</li> <li>8 Ω : 4 x 200 W</li> <li>- Bridged stereo</li> <li>8 Ω : 2 x 600 W</li> <li>- 2.1 stereo</li> <li>8 Ω : 2 x 200 W</li> <li>+ 1 x 600W bridged</li> </ul>
Type of amplification	Class H	Class H	Class AB
Damping factor	450	450	200
Cooling	Front-to-back regulated ventilation		
Connectors	<ul style="list-style-type: none"> <li>- Input: XLR/Jack combo connectors</li> <li>- Output: 4-Pole Speakon®</li> </ul>		<ul style="list-style-type: none"> <li>- Input: XLR + jack + RCA connectors</li> <li>- Output: Screw-on terminals + 4-pole Speakon®</li> </ul>
Protections	<ul style="list-style-type: none"> <li>- Against short-circuits and overloads</li> <li>- Automatic current limiter</li> <li>- Against DC current</li> <li>- High-temperature protection</li> </ul>		<ul style="list-style-type: none"> <li>- Against short-circuits</li> <li>- Current limiter</li> <li>- Against voltage deviations</li> <li>- Immunity to radio frequencies</li> <li>- Thermal protection and regulation</li> </ul>
Dimensions (L x W x H)	19" x 2 U: 483 x 89 x 440 mm		19" x 2 U: 483 x 89 x 375 mm
Weight	25 kg	16,8 kg	16 kg

# AMPLIFIERS



## VX700 II

Professional amplifier 2 x 350Wrms / 4Ω.

Code : B00295



## VX400 II

Professional amplifier 2 x 200Wrms / 4Ω.

Code : B00294



## VX200 II

Professional amplifier 2 x 110Wrms / 4Ω.

Code : B00293



VX700 II

	VX700 II	VX400 II	VX200 II
Power	- RMS stereo 4Ω: 2 x 350 W 8 Ω : 2 x 200 W  - Bridged mono 8 Ω : 1 x 700 W	- RMS stereo 4Ω: 2 x 200 W 8 Ω : 2 x 135 W	- RMS stereo 4Ω: 2 x 110 W 8 Ω : 2 x 65 W  - Bridged mono 8 Ω : 1 x 220 W
Type of amplification	Class D	Class D	Class D
Damping factor	200	150	150
Cooling	Front-to-back regulated ventilation		
Connectors	- Input: XLR + jack connectors - Output: Screw-on terminals + 4-pole Speakon®		
Protections	- Against short-circuits - Current limiter - Thermal protection and regulation		
Dimensions (L x W x H)	19" x 2 U: 483 x 89 x 260 mm		19" x 1U 483 x 44 x 320 mm
Weight	13 kg	9 kg	9.5 kg

# AMPLIFIERS




**AVM-3**  
Class D amplifier module for VIBE18-SUB Mk2.

---

Code : B00242

---




**AVM-2**  
Class D amplifier module for VIBE15 Mk2, VIBE30 Mk2 and VIBE15-SUB Mk2.

---

Code : B00241

---




**AVM-1**  
Class D amplifier module for VIBE8 Mk2, VIBE10 Mk2 & VIBE12 Mk2

---

Code : B00240

---



	AVM-3	AVM-2	AVM-1
Power	4Ω: 1200W RMS 8 Ω : 800 W RMS	4Ω: 800 W RMS 8 Ω : 500 W RMS	4Ω: 500 W RMS 8 Ω : 300 W RMS
Type of amplification	Class D		
Damping factor	350	350	320
Cooling	Regulated ventilation		
Connectors	- Input: XLR+jack+RCA connectors - Output: Speakon® 1+/1-		
Protections	- Against short-circuits - Signal + current limiter - Against overloads - Thermal protection		
Dimensions (L x W x H)	320 x 160 x 87 mm	320 x 160 x 87 mm	275 x 145 x 72 mm
Weight	2,79 kg	2,79 kg	2,39 kg

More information on: [www.jb-systems.eu](http://www.jb-systems.eu)

# SOUND PROCESSING

**DANTE™ is the NEW STANDARD for “Audio over IP” !  
Just call it “Art-Net for audio” !**

**DANTE™ advantages:**

- Uncompressed multi-channel audio over standard Ethernet networks.
- No bulky snake cables !
- No more buzzing due to ground loops !
- Cheap CAT5E-cabling + standard Ethernet switches
- Plug & Play : auto discovery, no IP-addresses, no network knowledge required!
- Easy routing of audio signals ! (Free Dante™ Controller software)
- Extremely low latency: < 1 ms
- Virtual Sound Card: turns any Windows PC / MAC into a Dante™ audio device.
- Up to 512 audio channels per GIGABIT network!
- Automatic discovery of all Dante™ devices on the network
- 1 Universal protocol: no compatibility problems !



**DBI-04**  
Dante/analog audio bridge, 4out, INSTALL

---

Code : B08203

**DBI-44**  
Dante/analog audio bridge, 4in/4out, INSTALL

---

Code : B08204

**DBT-04**  
Dante/analog audio bridge, 4out, TOURING

---

Code : B08205

**DBT-44**  
Dante/analog audio bridge, 4in/4out, TOURING

---

Code : B08206

EUROBLOCK connector with 4 outputs GPI & GPO for extra functionality and control:  
4 General Purpose Inputs: can be used to connect an on/off switch, potentiometer (adjustable voltage), ...  
4 General Purpose Outputs: can be used to control other equipment (switch equipment or lamps on/off, trigger a Powerpoint presentation, ... )  
Power: +24Vdc, PoE (Power over Ethernet)  
Port 1+2 activity indication on front AUDIO DSP with webpage control for extra functionality: compressors, limiters, parametric EQ, ...  
8x8 MATRIX: local premix, routing, ...  
Optional half 19" mounting bracket: 2 units in 1U 19" rack

EUROBLOCK connector with 4 inputs EUROBLOCK connector with 4 outputs GPI & GPO for extra functionality and control:  
4 General Purpose Inputs: can be used to connect an on/off switch, potentiometer (adjustable voltage), ...  
Possibility to connect a potentiometer to adjust the volume of one or more inputs and/or outputs  
4 General Purpose Outputs: can be used to control other equipment (switch equipment or lamps on/off, trigger a Powerpoint presentation, ... )  
Power supply: +24VDC, PoE (Power over Ethernet)  
Port 1+2 activity indication on front AUDIO DSP with webpage control for extra functionality: compressors, limiters, parametric EQ, ...  
8x8 MATRIX: local premix, routing, ...  
Optional half 19" mounting bracket: 2 units in 1U 19" rack

4 Balanced male XLR-outputs  
2 RJ45 Gigabit Ethernet I/O ports with internal switch.  
Power: 100-240Vac PowerCON, PoE (Power over Ethernet)  
Audio DSP with webpage control for extra functionality:  
compressors, limiters, parametric EQ, ...  
8x8 MATRIX: local premix, routing, ...  
Optional half 19" mounting bracket: 2 units in 1U 19" rack  
Rubber corners: for use as stage box

4 Balanced Combo-inputs  
LINE + MIC (-24dB PAD & 48V Phantom)  
4 Balanced male XLR-outputs  
2 RJ45 Gigabit Ethernet I/O ports with internal switch.  
Power: 100-240Vac PowerCON, PoE (Power over Ethernet)  
Audio DSP with webpage control for extra functionality:  
compressors, limiters, parametric EQ, ...  
8x8 MATRIX: local premix, routing, ...  
Optional half 19" mounting bracket: 2 units in 1U 19" rack  
Rubber corners: for use as stage box

## DANTE™ requirements:


Currently not all audio equipment can talk Dante™ language. The new Synq Dante™ I/O interfaces translate analog audio to and from Network Audio (Dante™).

### Analog → Dante™:

- Connect your MIC to the Dante™ network
- Connect your Guitar, audio player, etc. to the Dante™ network

### Dante™ → Analog:

- Connect the Dante™ network to your analog amplifier/active speaker
- Connect the Dante™ network to Recorder with analog input

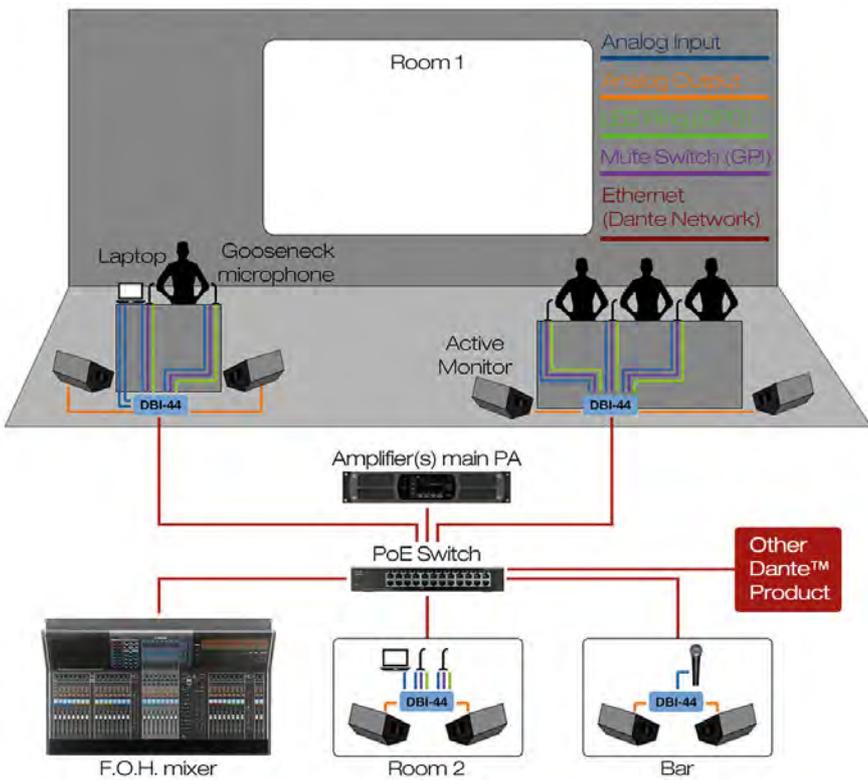

Multi-room install example using PoE

### Room 1:

- Easy cabling :  
1 single Cat5e network cable transports all audio signals in both directions. This makes it very easy to expand and modify the existing system.
- A single GPI trigger (here a potentiometer on the desk which is plugged into the DBI-44) sends a signal to the GPO connected devices (the gooseneck microphones and a LED light) to turn them on and off. GPIO can also be used to trigger or communicate with anything else on the network.
- Record and play audio from and to any room on the Dante™ network.


### Room 2:

- No need for a separate mixer:  
Mix all sources (2 microphones, one audio input from a computer, the audio from the main room) using the DBI-44 its integrated web browser and add EQ, compression, etc.
- If you need extra audio inputs just add an extra DBI-44 box. Thanks to the DBI-44 its integrated 8x8 matrix you can easily mix up to 8 separate inputs.
- GPIO allows you to control the gain of each microphone locally. Just connect a potentiometer to one of the GPI inputs.

### Bar:

- The DBI-44 box allows the playback of background music originating from any sound source in the Dante™ network.
- The DBI-44 box also allows to connect an extra microphone for announcements

## BUILT IN MATRIX AND AUDIO TREATMENT

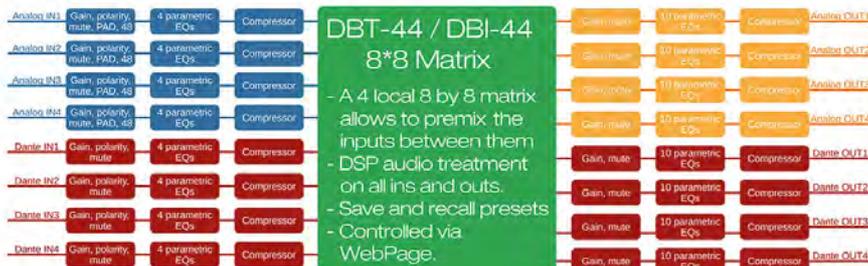

# SOUND PROCESSING



## SP26

2IN6OUT sound processor with software

Code : H10712



Inputs: 2 balanced inputs  
 Outputs: 6 balanced outputs  
 Sampling rate: 96kHz, 24-bit depth  
 Crossover / EQ Operational frequency range: 20Hz – 20kHz  
 Crossover filtering: Bessel, Butterworth (6, 12, 24 and 48dB/octave), Linkwitz-Riley (12 and 24dB/octave)  
 10-band equaliser: Bell, Notch, All Pass, Band Pass, Low/High Pass, Low/High Shelf  
 Equaliser gain : adjustable from -12dB to +12dB  
 Equaliser Q: Adjustable from 0.2 to 25  
 Phase inversion  
 Limiter attack time from 10 to 100  
 Limiter threshold from -48dB to 9dB  
 Password protection  
 50 presets available  
 Dimensions (mm): 483 x 127 x 45 (1U)  
 Weight: 3kg



## Q215

2x15-band equaliser +/- 12dB - 1U

Code : H9670



Stereo equaliser, 2/3 octaves from 31.5Hz to 16kHz  
 Adjustable output level: +12/-12 dB  
 20mm faders  
 Low-cut filter per channel (60Hz -3dB)  
 Balanced inputs: XLR, 6.35 TRS jack  
 Unbalanced inputs: RCA  
 Balanced outputs: XLR, 6.35 TRS jack  
 Unbalanced outputs: RCA  
 Recording output (REC OUT) on unbalanced RCA (output level -6 dB)  
 Signal level indicator: -10dB, 0dB, +10dB, +17dB  
 Low-cut and bypass indicator  
 Dimensions: 483 x 44 x 190 mm  
 Weight: 2.4kg



## BEQ-15

2x15-band stereo equaliser.


Code : B00288




2 x 15-band stereo equaliser 2/3 octaves from 25Hz to 16kHz  
 Adjustable output level: +/-6dB or +/- 12dB  
 20mm faders  
 Balanced inputs: XLR, 6.35 TRS jack  
 Unbalanced inputs: RCA  
 Balanced outputs: XLR, 6.35 TRS jack  
 Unbalanced outputs: RCA  
 Level switch: 6dB/12dB  
 Equaliser bypass switch  
 Subsonic filter switch  
 < 20Hz  
 Dimensions: 483 x 44 x 165 mm  
 Weight: 2.5 Kg

## SP26

- + Windows user interface software for unit configuration
- + Real-time monitoring
- + Sounding performance of any small or mid sized application

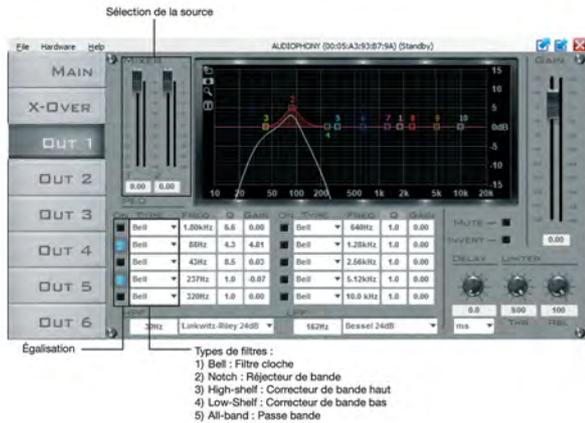

## 3. Interface X-OVER

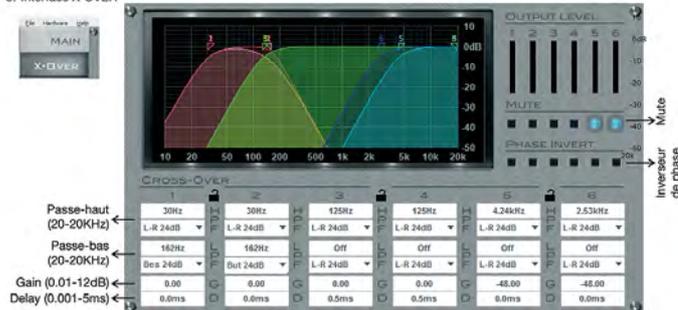

## ConvD2in

Converter Dante RJ45 - Analog in XLR3

Code : H11050



2 x XLR female  
 1 x RJ45  
 Input impedance: 20KΩ (balanced) / 10KΩ (unbalanced)  
 Frequency response: 20Hz - 20kHz±0.5 dBu  
 Sampling rate: 24 bit 44.1 kHz/48 kHz  
 Power supply: POE (Power over Ethernet)  
 Consumption: <-2W



## ConvD2out

Dante RJ45 - Analog Out XLR3 converter

Code : H11049



2 x XLR male  
 1 x RJ45  
 Impedance: 150Ω (balanced) / 75Ω (unbalanced)  
 Frequency response: 20Hz - 20kHz±0.5 dBu  
 Sampling rate: 24 bit 44.1 kHz/48 kHz  
 Power supply: POE (Power over Ethernet)  
 Consumption: <-2W

# SOUND PROCESSING



## X312

2-way stereo or 3-way mono active filter

Code : H9669



Inputs / outputs on balanced XLR + 4dB Stereo (2-way + subwoofer) or mono (3-way + subwoofer) operation  
LOW SUM mode to sum low frequencies from both inputs and output to mono  
Lows, mids and highs phase reversal possible  
In stereo mode:  
- Adjustment of cut-off frequency between highs and lows for each side (45 to 960Hz)  
In mono mode:  
- Adjustment of cut-off frequency between highs, mids and lows (45 to 960Hz and 450 to 9,600Hz)  
- Optional use of SUB output with adjustable level and cut-off frequency (20 to 200Hz)  
Dimensions: 483 x 175 x 44mm  
Weight: 2kg



## XO 2.4

Active filter: 2-way stereo or 3-way mono.

Code : B00287



Balanced XLR inputs and outputs  
Stereo or mono operation  
Phase reversal switch  
40Hz subsonic filter (with on/off switch)  
In stereo mode:  
- Adjustment of cut-off frequency between highs and lows for each side (45 to 960Hz)  
In mono mode:  
- Adjustment of cut-off frequency between highs, mids and lows (45 to 960Hz and 450 to 9,600Hz)  
Dimensions: 483 x 136 x 44mm  
Weight: 2kg



## ENH 2.3

Professional multi-band sound enhancer

Code : B00286



Adds harmonics to sound, increasing definition, presence and transparency. Considerably enhances low frequencies (more punch)  
Balanced XLR inputs and outputs  
Separate subwoofer output with adjustable output level and cut-off frequency from 100 to 250Hz.  
Low Mix adjustment for lows HPF from 1 to 8kHz for cut-off frequency  
High Mix adjustment for high-mids  
Phase reversal switch  
CLIP indicator  
Level indicator -40/-20/-6/-2dB  
Dimensions: 483 x 154 x 44mm  
Weight: 1 kg



## SDI-1

Stereo DI-box. Converts unbalanced audio signals into balanced signals

Code : B00279



This stereo DI-box is the perfect solution for various applications!  
It allows conversion of unbalanced audio signals into balanced signals for transport through long cables.  
The "ground lift" switch allows separation of the inputs/outputs to avoid ground loops.  
Solid anodised aluminium black housing  
1 RCA and XLR/6.35 jack combo input  
1 XLR output  
Max. input level: +21dBu  
Dimensions: 105 x 110 x 44 mm  
Weight: 0.440 Kg



## BDA-100

Active direct box

Code : H7678



1 unbalanced 6.35 jack input  
1 balanced XLR input  
1 XLR output  
Max. input level: 0/+20/+40dB  
Dimensions: 135 x 55 x 130 mm  
Weight: 0.700 Kg  
9V battery not included



## CONVERTER

USB/LINE converter and PHONO with Soft

Code : H9077



Provided with Audacity, the French audio processing software  
Comprehensive and efficient tools to optimise the quality of your recording  
Simple user interface, allowing to record vinyl records at high speed.  
Plug-and-play and driverless operation with most audio software on the market.  
2 RCA inputs (L and R), line/phono switch  
2 RCA outputs (L and R), line level  
Cable length: 1.5m



## BT10ER2

Bluetooth® 4.2 transmitter-receiver

Code : H10981



Bluetooth® 4.2  
Supported Bluetooth® Profiles: A2DP and AVRCP  
Apt-x® CSR™ Low Latency decoder for HD audio quality and low latency  
Operating distance: 10 meters on average - Class 2  
Autonomy up to 20 hours on average  
Battery: Lithium polymer 270mAh rechargeable battery  
Optical digital SPDIF and 3.5» jack digital optical connector  
Volume control with touch-sensitive keys



## BT-20R

Bluetooth® receiver HD  
3.5 jack output + USB charger

Code : H10305



Bluetooth® 4.2  
Supported Bluetooth® profiles: apt-X, A2DP and AVRCP  
Apt-x® decoder Low Latency 32ms  
Operating distance: 10 metres on average - Class 2  
Power supply: AC100-240V 50/60Hz  
USB output current: 5V / 1A / 5W  
3.5mm jack and RCA cable included

# MIXERS



- 1/2" microphone inputs via XLR plugs
- 1/2" Jack 6.35 balanced line input.
- 1/2" unbalanced stereo inputs on RCA and 3.5 jack
- 2-band equalizer on mic/line and stereo channels
- Gain control for each channel
- AUX level setting on each channel (Mi4U et Mi6U)
- Balanced MAIN output on 6.35 Jack
- Unbalanced Record output via RCA plugs
- Balanced AUX output on 6.35 Jack (Mi4U et Mi6U)
- Monitoring output via stereo Jack 6.35
- 1 USB port for connecting a computer (Mi4U et Mi6U)
- LED vu-meter for MAIN output



## Mi3

Mix 3 channels 2 Mic and 1 stereo

Code : H10909

**audiophony**  
EQUIPEMENTS



## Mi4U

Mixer 4 channels 2 Mic + 2 stereo and 1 Aux + USB port

Code : H10910

**audiophony**  
EQUIPEMENTS



## Mi6U

Mixer 6 channels 4 Mic + 2 stereo and 1 Aux + USB port

Code : H10911

**audiophony**  
EQUIPEMENTS

# MIXERS



**NEW**



**Mi46U-STAND**  
Microphone stand adapter for Mi4U, Mi6U and MIXtouch8 mix

Code : H10987




## Mi46U-STAND

Microphone stand adapter for Mi4U, Mi6U and MIXtouch8 mix

	Mi3	Mi4U	Mi6U
Mic Input	2	2	4
Stereo Input	1	2	2
Aux	-	1	1
Stereo L/R Output	1	2	2
USB port full duplex	-	1	1
Phantom power	+48V DC		
Gain	65dB(MIC main output)		
MIC CH. EQ±15dB	HI: 12kHz, LO:80Hz		
LINE CH. EQ±15dB	HI: 12kHz, LO:80Hz		
Frequency response	[20-20kHz]±1dB		
Maximum Output Level	+20dBu		
Meter	4 segments [-20dB to CLIP]		
Distortion	≲ 0.08%{20-20kHz}		
Power supply	DC 12V external adaptor		
Weight (kg)	0.54	0.78	0.98
Dimension[W*D*H]mm	190x140x68	220x160x68	220x220x68

# MIXERS



Mixing consoles for live mixing with 16 effects DSP plus compressors on microphone channels.

The integrated USB/SD/BT device avoids the need for additional peripherals for background music.



MPX16



**Bluetooth™**

**MPX6**  
Mixer 6 CH + compressor + Effects + USB/SD/BT player

---

Code : H10905

---





**Bluetooth™**

**MPX8**  
Mixer 8 CH + compressor + Effects + USB/SD/BT player

---

Code : H10906

---





**Bluetooth™**

**MPX12**  
12CH Mixer + Compressor + Effects + USB/SD/BT Player

---

Code : H10907

---





**Bluetooth™**

**MPX16**  
16CH Mixer + Compressor + Effects + USB/SD/BT Player

---

Code : H10908

---





Rack brackets for  
MPX mixers  
(the pair)



**NEW**

**MPX12-RACK**  
Racking brackets for MPX12

---

Code : H10986

---

**NEW**

**MPX8-RACK**  
Rack brackets for MPX8

---

Code : H10985

---

**NEW**

**MPX6-RACK**  
Rack brackets for MPX6

---

Code : H10984

---

	MPX6	MPX8	MPX12	MPX16
Inputs	6	8	12	16
Mic Input channels	2	4	8	12
Stereo Input channels	2	2	2	2
Gain	MIN - MAX	MIN - MAX	MIN - MAX	MIN - MAX
Mic	+6dB - +50dB	+6dB - +50dB	+6dB - +50dB	+6dB - +50dB
Line	+10dB - -34dB	+10dB - -34dB	+10dB - -34dB	+10dB - -34dB
EIN	-100dB	-100dB	-100dB	-100dB
Frequency response	-	-	-	-
Mic Channel	10Hz - 20kHz +1/-3			
THD Mic Channel	≤0.03%	≤0.03%	≤0.03%	≤0.03%
Signal to noise ratio	80dB	80dB	80dB	80dB
Output Levels	MAX +27(BAL)	MAX +27(BAL)	MAX +27(BAL)	MAX +27(BAL)
	MAX +22(UNBAL)	MAX +22(UNBAL)	MAX +22(UNBAL)	MAX +22(UNBAL)
Hi	2.5kHz	2.5kHz	2.5kHz	2.5kHz
Mid	2.5kHz	2.5kHz	2.5kHz	2.5kHz
Low	45Hz	45Hz	45Hz	45Hz
Low Cut	80Hz	80Hz	80Hz	80Hz
Compressor	YES	YES	YES	YES
+ 48V Phantom power	YES	YES	YES	YES
MP3/USB/SD Media Player	YES	YES	YES	YES
DSP Effects 16 programs	YES	YES	YES	YES
Bluetooth player	YES	YES	YES	YES
Dimensions (W x H x D)	227x70x359[mm]	283x70x359[mm]	395x70x359[mm]	395x70x359[mm]

# MIXERS



## LIVEtouch20

LIVEtouch20 - 20 channel digital mixing console

Code : H10901



## LIVEtouch-RACK

Rack for LIVEtouch20

Code : H10959



## CASE FOR LIVEtouch20

Flight case for LiveTouch20 mixer

Code : B03292



### FEATURES

- 12 microphone inputs + 2 stereo inputs
- 1 S/PDIF input/output and 1 AES/EBU output
- 4 mono busses / 5 stereo busses / 1 monitor bus
- 8 assignable XLR outputs
- 1 stereo monitor output and 1 headphone output
- 1 x 7" touch screen
- 8 effect modules
- 2 USB plugs for song recording, song playback and scene backups

### TECHNICAL DATA

- Inputs : 12 microphones (4 Combo), 2 stereo, S/PDIF and USB
- Input channel functions : Phase, Delay, high pass filter, 4 band parametric equalizer, noise gate, compressor, pan, effects
- Outputs : 8 assignable XLR, AES/EBU, S/PDIF and headphone
- Internal signal generator : White, sinusoidal and white noise

- Phantom power : 48V independently activatable on each channel
- USB Features : Play and record songs, system update, scene backup and external network card
- Screen : 7-inch, 1024 x 600 pixel, high definition touchscreen
- AD/DA : 192 KHz/24 bits max.
- Sampling frequency : 48 KHz / 44.1 KHz
- DSP : SHARC ADI 40-bit floating point processor, 4th generation, 450M
- Effects : 8 modules: 2 Reverbs, 2 Modulation, 2 Delay and 2 x15 bands graphic equalizers
- Système : Custom Android
- Network : Via 1 external USB module (supplied)
- Remote control : Via 1 iPad application
- Power supply : 100-240V 50/60Hz → DC12V
- Size : 445 x 325 x 100 mm
- Weight : 5.3 Kg

The LiveTouch20 is a 20 channels motorized faders digital mixer with large touch screen and USB ports. Full control is also available remotely via WIFI dongle provided to mix anywhere with your iPad. There are 12 Mic/Line inputs, 2 stereo inputs all routable via 4 mono busses, 4 stereo busses and master L/R.

The 1024x600 touch screen makes navigation simple and intuitive for studio or live applications.



App available for Apple iPad or 10" Android tablet

# MIXERS



## An amazing performer.

The MIXtouch8 is an 8-channel digital mixer. It offers physical or virtual control through its embedded software (HTML5).

- Direct access on each inputs in autonomy
- Integrated reader
- mp3 recorder on USB key
- Limited volume control in standalone mode
- Stereo recorder



**NEW**



**MIXtouch8**  
8-channel digital interface with web control interface

Code : H10991




**NEW**



**MIXtouch8-Rack**  
brackets for MIXtouch8

Code : H11016
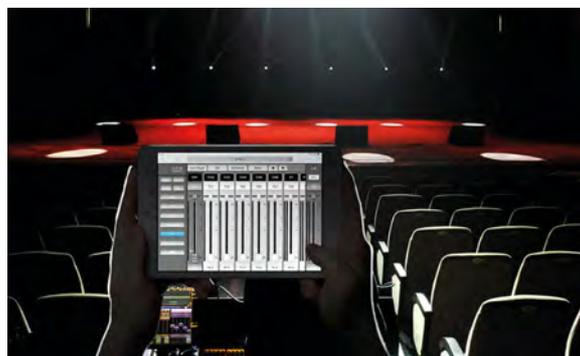
## No more mobile app. Your web browser is enough.

Connect to the MIXtouch8 with its «Hotspot» function or use your local network. There is no need for an application, just use a web browser.

The MIXtouch8 is compatible with all computers, tablets or smartphones. Several people can connect to it and use its internal software.



### CONNECTIVITY

- Mic inputs: 4 on XLR chassis + 2 on combo chassis
- Line input: 1 sur 2 châssis Jack 6.35 et mini Jack 3.5
- Master output: 1 on 2 XLR chassis
- AUX output: 2 on 2 6.35 Jack chassis
- Footswitch: 2 on 2 6.35 Jack 6.35
- Pre-listening: 1 on Jack 6.35

### TECHNICAL SPECIFICATIONS

- LINE INPUT IMPEDANCE: 3KΩ
- LINE INPUT IMPEDANCE: 20KΩ
- OUTPUT IMPEDANCE: 470Ω
- IMPEDANCE OF THE HEADPHONE OUTPUT: 100Ω
- RESIDUAL BUS NOISE: -90DBU
- MAXIMUM BUS POWER: +18DBU
- MAXIMUM VOLTAGE GAIN: 80DB INPUT TO OUTPUT
- DYNAMIC RANGE: 106DBU (20HZ-20KHZ)

- AD / DA: 24 BITS MAX / 192KHZ
- Signal processing: 40-bit floating-point processor
- Signal latency: <-1.8msec input to output
- Phantom power supply: 48V, each channel can be switched individually
- Crosstalk(@1KHz): -85 dB
- USB interface: 2 USB2.0 interface, maximum 32G supported, can be used for USB disk playback and recording, support WAV, MP3 format
- Network: WIFI connecting to USB wireless module, 1 LAN interface
- Effects: 2 Reverb and 2 Delay
- Power supply: 12V via adaptateur secteur (AC 100-240V, 50/60Hz)

### CONTENTS OF THE PACKAGE

- The MIXtouch8 console
- 1 External power supply
- 1 IEC power cord
- 1 WiFi dongle
- The user guide

# MIXERS

## B4.2 MEDIAMIX : Perfect all-in-one solution

- + Audio mixer mixes up to 4 sources:
  - Internal media player / FM-radio + 2 external line inputs (one with 3,5mm jack for iPod, ... )
  - MIC input with high/low EQ and Talkover (adjustable damping/threshold)
  - PFL monitoring with headphones output on front panel
  - Record output via RCA/cinch
- + 2 balanced zone outputs with separate volume and max. level trimmer to control different zones.
- + Zone 2 has an additional mono switch and 100Hz high pass filter for use with small speakers.



**NEW**



**B4.2 MEDIAMIX**  
Compact media player / mixer with integrated Bluetooth receiver

---

Code : B08400

---




**MIX 5.2**  
Mixer with 5 channels and 2 independent zones.

---

Code : B00119

---




The internal USB-media player supports MP3, WMA and WAV files.  
 RDS FM-radio with presets  
 Integrated Bluetooth receiver  
 IR Remote: controls media player, Radio presets, volume/mute.  
 Playback of up to 3 different commercials (manual & scheduled playback) with automatic interruption of media player / tuner playback.  
 Audio mixer mixes up to 4 sources:  
 Internal media player / FM-radio + 2 external line inputs (one with 3,5mm jack for iPod, ... )  
 MIC input with high/low EQ and Talkover (adjustable damping/threshold)  
 PFL monitoring with headphones output on front panel  
 Record output via RCA/cinch  
 2 balanced zone outputs with separate volume and max. level trimmer to control different zones.  
 Designed in Europe

**Inputs**  
 1 microphone with Talkover on front panel  
 5 microphones on back  
 4 line  
 2 phono

**Adjustments**  
 3-band equaliser on each output  
 3-band equaliser on microphone channel 1  
 Gain adjustment for each channel  
 Talkover level adjustment  
 Choice of zone A or B per channel

**Outputs**  
 Master A balanced and unbalanced  
 Master B balanced and unbalanced  
 Separate records A and B

LED VU-meters with 10 sections  
 Power supply: AC 230V ~ 50Hz  
 Dimensions: 483 x 134 x 130 mm  
 Weight: 2 Kg

# MIXERS



**USB**



## The perfect mixing console

Mixing console with 4 zones

- 2 USB ports
- 6 lines through RCA
- 2 phono
- 2 microphones with Talkover
- 1 Aux on front panel

2 USB ports allowing playback and recording via a computer



### MIX6usb

A compact and robust 19" mixer with stylish black design (white and blue LEDs).

Code : B00122



**Inputs**  
 1 USB port on channel 1 for playing and recording audio files  
 2 microphones with Talkover  
 5 lines,  
 2 phono or 2 line,  
 1 USB  
 Aux on front panel

**Adjustments**  
 3-band equaliser on each channel  
 Gain adjustment for each channel  
 Talkover level adjustment

**Outputs**  
 Balanced Master  
 Separate Booth and Record  
 1 USB port

LED VU-meters with 10 sections  
 Power supply: AC 230V ~ 50Hz  
 Dimensions: 483 x 179 x 104 mm  
 Weight: 5.1 Kg



### SMI-84

An ideal mixer for any pub, bar, hotel, restaurant, etc.

Code : B00123



Mixing console with 4 zones  
 - 2 USB ports  
 - 6 lines through RCA  
 - 2 phono  
 - 2 microphones with Talkover  
 - 1 Aux on front panel

Level adjustment on front panel  
 Microphone equaliser on front panel  
 Output equaliser on back

**Outputs**  
 Zone A, B, C through XLR mono  
 Stereo Master through XLR and RCA  
 All outputs are also Euroblock connectors  
 Mute key on Euroblock  
 Priority input on Euroblock  
 2 USB ports allowing playback and recording via a computer

Power supply: AC 230V ~ 50Hz  
 Dimensions: 483 x 134 x 184 mm  
 Weight: 4.2 Kg



# MIXERS



13 inputs on 7 channels (3 mics, 5 line, 2 phonos or 2 USB, 1 AUX)

2 USB connections (USB1 is Bidirectional) for connection to PC/Mac.

Internal WMA, WAV and MP3 mediaplayer for USB memory sticks and SD card (Max 16GB / 18 folders / 2000 audio files)

3 separate balanced microphone inputs with talkover function

Treble, mid, bass controls on all channels

Assignable crossfader

1 Master output and 1 Booth output with individual level control.

Master with balanced XLR outputs

LED VU-meters on input channels and Master

Pre-fade listening with cue mix option





**CLUB7-usb**  
DJ Mixer, 13 inputs over 7 channels  
(3 microphones, 5 line, 2 phono or 2 USB,  
1 auxiliary)

Code : B00125



**Inputs**  
2 USB ports on channels 2 and 3 allowing playback and recording of audio files  
3 microphones with Talkover  
5 lines,  
2 phono or 2 USB,  
1 auxiliary or Player

Integrated USB/SD reader for mp3, WAV or WMA files

**Adjustments**  
3-band equaliser on each channel  
Gain adjustment for each channel  
Talkover level adjustment

**Outputs**  
Balanced Master  
Separate Booth and Record  
2 USB ports

LED VU-meters for channels 1-4  
Power supply: AC 230V ~ 50Hz  
Dimensions: 483 x 222 x 78 mm  
Weight: 4.5 Kg

# MIXERS



**BATTLE4-usb**  
DJ Mixer, 9 inputs on 4 channels (3 line inputs, 2 phono, 2 microphones, 2 USB)

Code : B00126



**Inputs**  
2 USB ports on channels 2 and 3 allowing playback and recording of audio files  
3 line inputs  
2 phono  
2 microphones

**Adjustments**  
3-band equaliser on each channel  
2-band equaliser on microphone channel  
Gain adjustment for each channel

**Outputs**  
Balanced Master  
Separate Booth and Record  
2 USB ports

Master LED VU-meters per channel  
Power supply: AC 230V – 50Hz  
Dimensions: 237 x 315 x 105 mm  
Weight: 3.3 Kg



**DIGITAL-3**  
3-channel mixer with 1 microphone and 2 USB

Code : H9254



**Inputs**  
2 USB ports on channels 1 and 3 allowing playback and recording of audio files  
3 phono through RCA  
3 line through RCA  
1 microphone through jack with Talkover

**Adjustments**  
3-band equaliser on each channel  
2-band equaliser on microphone channel  
Gain adjustment for each channel

**Outputs**  
Master output, high level  
2 USB ports

On/off switch  
LED VU-meter for Master  
External power supply  
Dimensions: 254 x 308 x 82.5 mm  
Weight: 3.4 kg



**DIGITAL-2**  
2-channel DJ Mixer with 1 microphone and 2 USB

Code : H8682




**Inputs**  
2 USB ports allowing playback and recording of audio files  
2 PHONO inputs with switchable RCA connectors  
2 LINE inputs with switchable RCA connectors  
1 DJ mic input with jack connector and TALKOVER

**Adjustments**  
Low/mid correction -12/+12 dB through DJmic channel  
Gain and lows/mids/highs correction -15/+15 on stereo channels

**Outputs**  
Unbalanced Master output through RCA  
Headphone output  
2 USB ports

General LED VU-meter with 10 sections  
External power supply  
Dimensions: 178 x 270 x 85 mm  
Weight: 1.9 Kg

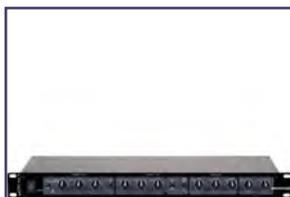

**KM 4.1**  
Echo unit combined with a small mixer, perfect for karaoke.

Code : B00289



**Inputs**  
2 mic with Talkover on back  
2 line

**Adjustments**  
General 3-band equaliser  
Level adjustment for each input  
General level adjustment  
Echo chamber adjustment (delay, repeat, echo)

**Output**  
Unbalanced mix output

Power supply: AC 230V – 50Hz  
Dimensions: 483 x 44 x 180 mm  
Weight: 2 Kg

# CD PLAYERS

CD/USB/SD players. Rack-mountable CD, USB or SD players for live applications in sound booth, with DJ, theatre, or entertainment-oriented functions, you will certainly find a model that suits your needs among our players.




**USB 1.1 REC**  
CD/USB player + recorder

---

Code : B00365



CD Mp3, Wave and CDA player  
USB player with double USB mass-storage input (on front and back)

Lossless recording from an external source in WAV or MP3 files (bitrate: 64, 128, 192, 256 and 320kbit/s), even during playback of CD tracks or USB devices.  
Auto or manual recording processor: for a simple recording process without distortion

Variable pitch with Master Tone  
Auto and manual BPM, perfect loop (IN/OUT/RELOOP)  
AVM: Anti Vibration Memory  
Auto CUE

Large screen with VFD display  
ID3Tag visualisation of artists, titles and genres  
Tree structure mp3 file search system.

Infrared remote control included for playback, recording, looping, search, pitch, and volume functions.

Right/left output through XLR and RCA

Dimensions: 482 x 89 x 270 mm  
Weight: 4.35 kg



**Mpu320**  
Double CD player with two USB mass-storage ports and touch-sensitive jog wheels

---

Code : H9681



Double CD player, Mp3, Wave and CDA  
USB player with double USB mass-storage input (on front and back)

Jog wheel with two modes: Jog scratch and pitch bend  
Variable pitch with Master Tone  
Auto and manual BPM, perfect loop (IN/OUT/RELOOP)  
AVM: Anti Vibration Memory  
Auto CUE

Large screen with VFD display  
ID3Tag visualisation of artists, titles and genres  
Tree structure mp3 file search system.

Xstart for cue start with crossfader on equipped mixers, Relay for continuous playback

Player dimensions 482 x 89 x 263 mm  
Remote dimensions 482 x 91 x 94 mm  
Weight: 5.1kg [player] 1.9kg [remote]

## Mpu320

Access all your music in seconds with this DJ media player.

The dual media player Mpu320 opens the doors to a world without limits. You can now store all your tracks on hard disk while enjoying its two CD/Mp3 players and two USB ports.

Since each USB port is accessible simultaneously by both controllers, you can keep track of your tracks without changing media.

Its touch-sensitive wheels work in classic or vinyl mode and offer a feel comparable to that of a flat-panel player.

Its pitch can be adjusted from 4% to 16% (100% for audio CDs) and is equipped with a Master Tone function to vary the speed while maintaining the initial tone.

In addition, the Mpu320 offers a perfect loop with instantaneous responsiveness to the controls.

Two simultaneously accessible USB ports

No USB storage limit

Instant reactivity to orders

# VINYL TURNTABLES



Back to the source. Listen to your favourite albums on high-quality vinyl, protect your collection with easy-to-use solutions offering unmatched sound quality thanks to our vinyl-dedicated range of products.



## XTRM-1

Direct Super High torque motor + line out

Code : B00322



## TT-CASE

High-quality modern flight-case for DJ turntables (T2, T3, X-TRM1, SL1200, etc.).

Code : B03206



Direct Drive 3-phase Super High Torque motor with extreme torque of 4.5kg/cm  
Adjustable start and stop time from 0.2 to 6 seconds  
3 speeds: 33, 45, 78 rpm with quartz lock and optical sensors  
Pitch at  $\pm 10\%$   $\pm 20\%$   $\pm 50\%$   
Standard or reverse playback  
2 Start/Stop buttons  
White LED lighting on cartridge  
Phono or Line output on back  
High-quality S-shaped metal tonearm with adjustable height.  
Special anti-resonant frame  
Tall adjustable support legs  
Dimensions: 450 x 353 x 86 mm  
Weight: 12 kg  
Comes with cartridge holder, felt mat and 45 rpm adapter

High-quality modern flight-case for DJ turntables (T2, T3, X-TRM1, SL1200, ...).  
2 butterfly latches, solid handle, interior finish in shock-absorbing foam rubber



# MICROPHONES

## RP1 : Cardioid dynamic microphone

Taking its place among the very best

We put so much efforts into the RP1 that we created a microphone beyond all our expectations.

Its unidirectional membrane was handpicked among hundreds for its dynamism and source fidelity. Designed for singers, it will transcend your voice on any stage.

- + Designed for live singing performances
- + Powerful, crystal-clear output
- + Very resistant metal housing
- + Supplied with a pouch bag and a clip




**RP1**  
Dynamic cardioid microphone for voice

---

Code : H9654

---



Use: Vocals  
Type: Dynamic cardioid  
Finish: Moulded aluminium body, reinforced anti-shock grill and pop filter  
Connection: XLR  
Impedance: 600Ω +/-30% @ 1KHz  
Frequency response: 70Hz - 16kHz  
Sensitivity: -53dB +/-3dB  
Weight: 360 g  
Dimensions: 180 x 53mm



**RS1**  
Dynamic microphone for voice

---

Code : H9653

---



Use: Vocals  
Type: Dynamic cardioid  
Finish: Moulded aluminium body, reinforced anti-shock grill and pop filter  
Connection: XLR  
Impedance: 600Ω +/-30% @ 1KHz  
Frequency response: 40Hz - 16kHz  
Sensitivity: -52dB +/-3dB  
Weight: 355 g  
Dimensions: 185 x 50 mm



**JB27**  
Professional microphone

---

Code : B00410

---



Use: Vocals  
Type: Dynamic cardioid  
Finish: Moulded aluminium body, reinforced anti-shock grill and pop filter with ON/OFF  
Connection: XLR  
Impedance: 250Ω  
Frequency response: 50Hz - 18kHz  
Sensitivity: -72dB  
Comes with case, clamp and 6m XLR to mono jack cable



**JB10**  
Professional dynamic microphone

---

Code : B00402

---



Use: Dynamic microphone for entertainment and speech  
Type: Dynamic cardioid  
Finish: Metal body and solid build with ON/OFF button  
Connection: XLR  
Impedance: 500 Ω  
Frequency response: 70Hz - 14kHz  
Sensitivity: -75dB  
Comes with case, clamp and 6m XLR to mono jack cable

# MICROPHONES



## RS1 : Dynamic cardioid microphone

Outstanding in any case

The RS1 is a very versatile and intuitive microphone, giving its best in any situation.

Its membrane was built to absorb the movements and hands noises while its aluminium housing and steel grille make it perfect for stages.

- + Very resistant
- + Movement interferences canceller
- + Supplied with a pouch bag and a clip




**DMC62**  
Dynamic microphone for entertainment and speech

---

Code : H9652

---



Use: Dynamic microphone for entertainment and speech  
 Type: Dynamic cardioid  
 Finish: Metal body and solid build with ON/OFF button  
 Connection: XLR  
 Impedance: 500 Ω  
 Frequency response: 80Hz - 15kHz  
 Sensitivity: -54dB  
 Comes with case, clamp and 6m XLR to mono jack cable



**JB5**  
Semi-professional dynamic microphone for DJ, voice or music

---

Code : B00408

---



Use: Dynamic microphone for entertainment and speech  
 Type: Dynamic cardioid  
 Finish: Metal body and solid build with ON/OFF button  
 Connection: moulded cable with jack connector  
 Impedance: 600 Ω  
 Frequency response: 100Hz - 12kHz  
 Sensitivity: -74dB  
 Comes with 2m mono jack cable



**JB30**  
Gooseneck microphone

---

Code : B00411

---



Use: Dynamic gooseneck microphone for speech  
 Type: Unidirectional microphone  
 Finish: 30cm metal gooseneck with ON/OFF button  
 Connection: XLR  
 Impedance: 500 Ω  
 Frequency response: 80Hz - 14kHz  
 Sensitivity: -74dB



**JB33**  
Suitable for conferences, etc.

---

Code : B00406

---



Use: Conference gooseneck microphone  
 Type: Condenser Electret 1.5V  
 Finish: 23cm metal gooseneck with ON/Standby/OFF button  
 Connection: 3.5 and 6.35 jack  
 Impedance: 1000 Ω  
 Frequency response: 70Hz - 16kHz  
 Sensitivity: -66dB

# UHF410 RANGE

The UHF410 range benefits from the latest technological developments for optimal transmission quality. This range meets European requirements.

It is now available in two frequency ranges:

- F5 for the 500MHz range
- F8 for the 800 MHz range

Please check the authorized frequency bands in your area.

More information on [www.audiophony.com](http://www.audiophony.com)



NEW

500  
MHz  
range



**UHF410-Base-F5**  
UHF true diversity receiver with auto scan and sync function

---

Code : H11026



NEW

500  
MHz  
range



**UHF410-Hand-F5**  
Dynamic handheld microphone transmitter

---

Code : H11027



NEW

500  
MHz  
range



**UHF410-Body-F5**  
UHF diversity waistband transmitters

---

Code : H11028



True Diversity receiver  
**Frequency ranges UHF 514-564 MHz**  
**4G compatible**  
 Programmed frequencies with auto-scan function  
 Presets for 8 groups, 16 channels  
 Total channels: 997  
 LCD display: frequency, group, channel, RF & AF  
 Balanced and unbalanced audio output through XLR and 6.35 mono jack  
 Line or Mic level  
 Volume level adjusted through rotary switch on front  
 Detachable BNC antennae, multiple accessories available  
 Power supply: 12V DC (adapter provided)  
 Dimensions: 200 x 42 x 183mm (rack-mountable 19 inch by two)

Dynamic handheld microphone transmitter  
**Frequency ranges UHF 514-564 MHz**  
**4G compatible**  
 Output power: 35mW (max.)  
 40 programmed frequencies with SYNC function  
 LCD display: channel, battery level  
 Power supply: 2 AA 1.5V batteries (not included)  
 Average battery life: 10 hours  
 Dimensions: 260 x 54mm diameter

**Frequency ranges UHF 514-564 MHz**  
**4G compatible**  
 Output power: 35mW (max.)  
 40 channels with auto-scan function  
 LCD display: channel, battery level  
 Mic input through mini XLR  
 Gain level -20/-10/0 dB  
 Power supply: 2x AA type 1.5V batteries (not included)  
 Battery life: 10 hours on average  
 Dimensions: 98 x 65 x 25mm (+ 75mm for antenna)

# UHF410 RANGE



**800 MHz range**

## UHF410-Base-F8

UHF true diversity receiver with auto scan and sync function

Code : H10271



True Diversity receiver  
Frequency ranges UHF 823 – 832 and 863 – 865 MHz,  
Programmed frequencies with auto-scan function  
Presets for 8 groups, 12 channels  
Total channels : 442  
LCD display: frequency, group, channel, RF & AF  
Balanced and unbalanced audio output through XLR and 6.35 mono jack  
Line or Mic level  
Volume level adjusted through rotary switch on front  
Detachable BNC antennae, multiple accessories available  
Power supply: 12V DC (adapter provided)  
Dimensions: 200 x 42 x 183mm (rack-mountable 19 inch by two)



**800 MHz range**

## UHF410-Hand-F8

Dynamic handheld microphone transmitter

Code : H10272



Dynamic handheld microphone transmitter  
True Diversity transmitter  
Frequency ranges UHF 823 – 832 and 863 – 865 MHz  
Output power: 10mW (max.)  
40 programmed frequencies with SYNC function  
LCD display: channel, battery level  
Power supply: 2 AA 1.5V batteries (not included)  
Average battery life: 10 hours  
Dimensions: 260 x 54mm diameter



**800 MHz range**

## UHF410-Body-F8

UHF diversity waistband transmitters

Code : H10273



True Diversity Transmitter  
Frequency ranges UHF 823 – 832 and 863 – 865 MHz  
Output power: 10mW (max.)  
40 channels with auto-scan function  
LCD display: channel, battery level  
Mic input through mini XLR  
Gain level -10/0/+10dB  
Power supply: 2x AA type 1.5V batteries (not included)  
Battery life: 10 hours on average  
Dimensions: 98 x 65 x 25mm (+ 75mm for antenna)



## UHF410-Head

Sweatproof headset microphone

Code : H10274



Sweatproof headset electret condenser microphone, ideal for sport clubs  
Sensitivity: -47 ±4dB  
Polarity: Unidirectional cardioid  
Frequency response: 100Hz - 10KHz  
Operating voltage: 1.5V  
Power consumption: 0.5mA max.  
Signal to noise ratio: Higher than 60dB  
Accessories included: Windscreen  
Connectivity: Mini XLR



## BODYPOCKET

Neoprene waistband for UHF-BODY transmitter

Code : H10484



Compatible with most transmitters on the market  
Ideal for sports clubs



## WHS-20

Mini XLR condenser headset microphone

Code : B00442



Headset microphone for musicians, teachers and fitness clubs  
Must be paired with a WBP-20 transmitter  
Mini XLR connector  
Comes with windscreen and adjustable headband  
Unidirectional condenser capsule  
Frequency response: 100Hz to 16kHz  
S/N: > 60dB  
Impedance: 2.2 kOhms



## UHF410-Lava

Discrete lavalier condenser microphone

Code : H10275



Miniature lavalier electret condenser microphone  
Sensitivity: -47 ±4dB  
Polarity: Omnidirectional cardioid  
Frequency response: 50Hz - 10KHz  
Operating voltage: 1.5V  
Power consumption: 0.5mA max.  
Signal to noise ratio: Higher than 58dB  
Accessories included: Windscreen and fastening pin  
Connectivity: Mini XLR  
Dimensions: 37 x 5,5mm diameter



## RW2

Micro headband, condensing cell, light color

Code : H10946



Type: Condenser Omni-directional  
Connection: Mini XLR  
Imp.dance : 2.2K Ohms @ 1KHz  
Frequency response: 70Hz - 16kHz  
Sensitivity: -42dB +/-3dB  
Weight: 21 g

# ANTENNA UHF410



**UHF-410-Boost**  
Booster antenna with BNC connector

Code : H10276



Gain from 9 dB +/-1dB  
Frequency range: 500 - 950 MHz  
Operating voltage: 8V  
Impedance 50Ω



**UHF410-Hold**  
Antenna support with BNC connector

Code : H10277



5/8" threading for microphone stand and male/male BNC connector



**UHF410-Split**  
2-in-1 Splitter IN/OUT with BNC connector

Code : H10278



Frequency range: 500 - 1000 MHz  
Stationary wave report (VSWR): < 2  
Input impedance: 50 Ω  
Isolation: 18dB  
Loss: < 3dB  
Connectors: BNC  
Dimensions: 77 x 64 x 26 mm



**UHF410-BNC1**  
BNC/BNC connector for extension

Code : H10641



**UHF410-Rall1m**  
BNC/BNC 1 metre antenna extension cable

Code : H10280



**UHF410-Rall10m**  
BNC/BNC 10 metre antenna extension cable

Code : H10281



**UHF410-BNC2**  
BNC/BNC connector for bracket

Code : H10639



**UHF410-Rack**  
Long bracket for receiver

Code : H10640



**UHF410-Ant**  
Long range directional antenna with BNC connector

Code : H10279



Frequency range: 500 - 1000 MHz  
Beam width:  
80° E-plane, 140° H-plane  
Impedance: 50 Ω  
Connector: BNC  
Dimensions: 295 x 210 x 31 mm

# UHF410 PACK



**800 MHz range**

**PACK-UHF410-Lava-F8**

---

Code : H10284

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Body waistband transmitter  
 1 UHF410-Lava lavalier microphone  
 1 carrying case

**800 MHz range**

**PACK-UHF410-Hand-F8**

---

Code : H10282

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Hand handheld microphone  
 1 carrying case

**800 MHz range**

**PACK-UHF410-Head-F8**

---

Code : H10283

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Body waistband transmitter  
 1 UHF410-Head headset microphone  
 1 carrying case

**500 MHz range**

**PACK-UHF410-Lava-F5**

---

Code : H11144

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Body waistband transmitter  
 1 UHF410-Lava lavalier microphone  
 1 carrying case

**500 MHz range**

**PACK-UHF410-Hand-F5**

---

Code : H11142

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Hand handheld microphone  
 1 carrying case

**500 MHz range**

**PACK-UHF410-Head-F5**

---

Code : H11143

---

Pack including:  
 1 UHF410-Base receiver  
 1 UHF410-Body waistband transmitter  
 1 UHF410-Head headset microphone  
 1 carrying case

# GO RANGE

The GO UHF microphone range is equipped with the latest technological developments for optimal transmission quality.

Equipped with high quality electronics, transmitters and receivers now allow the use of 4 microphones simultaneously with optimal reception quality.

Now available in two frequency ranges:

→F5 for the 500MHz range

→F8 for the 800 MHz range

Please check the authorized frequency bands in your area.

More information on [www.audiophony.com](http://www.audiophony.com)



NEW

500 MHz range



### GO-Mono-F5

UHF diversity receiver, 16 frequencies for 1 transmitter

Code : H11029

**audiophony**  
EQUIPMENT

UHF 16-frequency receiver  
**Frequency ranges UHF 514-542 MHz, 4G compatible**  
 Diversity system for reception free of micro-cuts.  
 Adjustable squelch for parasite absorption  
 Simultaneous operation of 4 receivers (4 mics)  
 Adjustable antennae on front  
 Average range 70m in ideal conditions  
 Balanced XLR and unbalanced jack outputs  
 Rack-mountable by two via FREE-RACK (optional)  
 Dimensions: 130 x 36 x 92 mm

NEW

500 MHz range



### GO-Hand-F5

UHF transmitter handheld condenser microphone

Code : H11030

**audiophony**  
EQUIPMENT

Handheld microphone only  
 Must be paired with a GO-MONO receiver  
**Frequency ranges UHF 514-542 MHz, 4G compatible**  
 High-end Electret condenser capsule  
 Distortion rate lower than 1% @ 1kHz  
 Works with AA-type 1.5V batteries  
 Dimensions: 237 x 58 mm

NEW

500 MHz range



### GO-Body-F5

Waist transmitter housing for lavalier or headset microphone

Code : H11031

**audiophony**  
EQUIPMENT

Pocket UHF transmitter 16 frequencies  
**Frequency ranges UHF 514-542 MHz, 4G compatible**  
 Mini XLR connector  
 Adjustable impedance on either Line or Mic position  
 Works with AA-type 1.5V batteries  
 Dimensions: 65 x 100 x 27 mm



### RW2

Micro headband, condensing cell, flesh colour

Code : H10946

**audiophony**  
EQUIPMENT

Type: Condenser Omni-directional  
 Connection: Mini XLR  
 Impedance: 2.2K Ohms @ 1kHz  
 Frequency response: 70Hz - 16kHz  
 Sensitivity: -42dB +/-3dB  
 Weight: 21 g

# GO RANGE



800 MHz range



### GO-Mono-F8

UHF diversity receiver, 16 frequencies for 1 transmitter

Code : H9988



UHF 16-frequency receiver  
 Frequency ranges UHF 823 - 832 and 863 - 865 MHz  
 Diversity system for reception free of micro-cuts.  
 Adjustable squelch for parasite absorption  
 Simultaneous operation of 4 receivers (4 mics)  
 Adjustable antennae on front  
 Average range 70m in ideal conditions  
 Balanced XLR and unbalanced jack outputs  
 Rack-mountable by two via FREE-RACK (optional)  
 Dimensions: 130 x 36 x 92 mm

800 MHz range



### GO-Hand-F8

UHF transmitter handheld condenser microphone

Code : H9989



Handheld microphone only  
 Frequency ranges UHF 823 - 832 and 863 - 865 MHz  
 Must be paired with a GO-MONO receiver  
 High-end Electret condenser capsule  
 Distortion rate lower than 1% @ 1kHz  
 Works with AA-type 1.5V batteries  
 Dimensions: 237 x 58 mm

800 MHz range



### GO-Body-F8

Waist transmitter housing for lavalier or headset microphone

Code : H9990



Pocket UHF transmitter 16 frequencies  
 Frequency ranges UHF 823 - 832 and 863 - 865 MHz  
 Mini XLR connector  
 Adjustable impedance on either Line or Mic position  
 Works with AA-type 1.5V batteries  
 Dimensions: 65 x 100 x 27 mm



### GOHead

Headband electret microphone - mini XLR

Code : H9991



Headband microphone only  
 Must be combined with a GO-BODY transmitter and a GO-MONO receiver  
 Mini XLR connector  
 Supplied with a microphone windshield and an adjustable headband  
 Unidirectional electret  
 Frequency response : 100 Hz at 16 kHz  
 S/N : → 60 dB



### GOLava

Lavalier microphone - mini XLR

Code : H9992



Tie-clip microphone only  
 Must be combined with a GO-BODY transmitter and a GO-MONO receiver  
 Mini XLR connector  
 Supplied with a microphone windshield and a tie clip  
 Unidirectional electret  
 Frequency response : 100 Hz at 16 kHz  
 S/N : → 60 dB



### RP-WMIC

19" adapter for 1 or 2 receivers Go

Code : B00437



19" adapter for 1 or 2 receivers (WMS-1 or WBS-2 set).



### FREE-RACK

19 inch rack bracket for 2 GO receivers

Code : H9374



Material: Steel  
 Finish: Black paint



### MICRO CASE 3U

Rack 19" 3U 230mm/300mm

Code : B03221



Flight case for 19-inch HF microphone receiver.  
 Depth 230mm (300mm with cover)

# GO PACK

800  
MHz  
range



## PACK GO-LAVA-F8

Code : H10000

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-MONO waist transmitter  
1 GO-Lava lavalier mic

800  
MHz  
range



## PACK GO-HEAD-F8

Code : H10001

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-Body waist transmitter  
1 GO-Head headset microphone

800  
MHz  
range



## PACK GO-HAND-F8

Code : H9999

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-Hand handheld microphone

500  
MHz  
range



## PACK GO-LAVA-F5

Code : H11147

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-MONO waist transmitter  
1 GO-Lava lavalier mic

500  
MHz  
range



## PACK GO-HEAD-F5

Code : H11146

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-Body waist transmitter  
1 GO-Head headset microphone

500  
MHz  
range



## PACK GO-HAND-F5

Code : H11145

 **audiophony**  
EQUIPMENTS

Pack including:  
1 GO-MONO receiver  
1 GO-Hand handheld microphone

# AUDIO HEADPHONES



**HPS-2**  
Professional DJ headphones

Code : B00508



**HP2000 PRO**  
Professional high-performance earphones for DJ.

Code : B00505



**HEADZ ONE**  
The ultimate multimedia headphone

Code : B08300



**HeadZ Fuchsia**  
The best of light earphones + mic with outstanding sound quality for your smartphone, tablet, laptop, etc.

Code : B00512



Transducer type: Dynamic  
Speaker diameter: 50 mm  
Impedance: 29 Ω  
Sensitivity: 101 dB +/-3 dB  
Admissible power: 1000 mW  
Frequency response: 15 Hz - 22 kHz  
Cable: 3m twisted cable and smartphone cable with integrated microphone  
Connections: 3.5 mm with 6.35 mm adapter supplied  
Weight: 280 g

Driver diameter: 57 mm  
Impedance: 64 Ω  
Sensitivity: 107 dB  
Maximum power: 3500 mW  
Frequency response: 5 - 30kHz  
Cable: 3m coiled cable with 3.5/6.35 jack adapter and right-angled 6.35  
Carrying case and replacement ear pads included  
Weight: 290 g

Specifications Headphones:  
Frequency Response: 10 - 20.000Hz  
SPL: 97dB ± 3dB at 1mW  
Impedance: 32Ω  
Weight: 200g (without cable)  
Specifications Microphone:  
Type: Omnidirectional Condenser Microphone  
Frequency Response: 50Hz - 18KHz  
Sensitivity: -62dB ± 3dB at 1 KHz  
Impedance: 8.2KΩ  
Link output

Headphones for smartphone, tablet or laptop  
Driver diameter: 38 mm  
Impedance: 64 Ω  
Sensitivity: 98 dB  
Frequency response: 10 - 20 kHz  
Cable: with integrated microphone and computer adapter  
Weight: 160 g  
Link output  
Fuchsia pink colour



HEADZ ONE and HEADZ FUCHSIA offer a rather unique function . It is the LINK output that allows you to connect a second headphone to the first one. So 2 people can listen to the same source.





**GOA**  
GEARS OF ART  
**CR80A-COMBO MK2**

# PORTABLE SOUND SYSTEMS



# PORTABLE SOUND SYSTEMS

## CR25A-COMBO

12" 250W portable speaker Bluetooth® compatible, with a USB player and 2 UHF microphone

- + Performance
- + Power
- + Robustness

The CR25A-COMBO is a powerful all-in-one sound system producing a high-quality sound output, adapted to any mobile installation.

It features a USB/SD reader, a Bluetooth® receiver, two UHF handheld microphone and a mixer allowing you to plug two extra microphones and an external source. In brief: it is complete, powerful, and easy to use.

But it is also easy to carry, thanks to its built-in trolley. The icing on the cake: its built-in storage compartment has enough room for two mic and remains discreet.

### Key points :

- Battery level display by LED display
- Simultaneous charging and use
- Automatic shutdown in case of too low battery level
- Storage compartment for two microphones and cables
- Retractable handle and wheels
- supplied with two UHF hand mic
- Optional headset microphone available



Available in two frequency ranges :

- F5 for the 500MHz range
- F8 for the 800 MHz range

Please check the authorized frequency bands in your area.

More information on  
[www.audiophony.com](http://www.audiophony.com)





**800 MHz range**

**CR25A-COMBO-F8**  
Battery-powered portable sound system, 250 W RMS with BT, USB reader and two UHF microphones

Code : H10789




**NEW**

**500 MHz range**

**CR25A-COMBO-F5**  
Battery-powered portable sound system, 250 W RMS with BT, USB reader and two UHF microphones

Code : H11025




**COV-CR25A**  
Protective cover for CR25A-COMBO

Code : H10791



Power rating: 250 W (2 channels)  
Loudspeaker: 12" loudspeaker + 1.35" driver  
Microphones supplied : Two hand-held UHF microphones, 16 selectable frequencies  
Frequency ranges: UHF 823 to 832 MHz and 863 to 865 MHz  
Free UHF microphone slot: No  
Source: USB/SD reader + Bluetooth®  
Free music player slot: No  
Inputs: Two LINE inputs on 3.5 mm stereo jack or RCA, two MIC/LINE inputs on combined XLR/Jack  
Echo chamber with adjustable delay  
Outputs: One LINE level on 6.35 mm TRS jack  
Battery: 2 x 18 V / 7 Ah NP  
Battery life: 5 hours (average)  
Weight: 24.5 kg  
Dimensions: 615 x 350 x 395mm  
Accessories supplied: Built-in trolley, infrared remote control

Power rating: 250 W (2 channels)  
Loudspeaker: 12" loudspeaker + 1.35" driver  
Microphones supplied : Two hand-held UHF microphones, 16 selectable frequencies  
Frequency ranges: UHF 514-542 MHz  
4G-compatible  
Free UHF microphone slot: No  
Source: USB/SD reader + Bluetooth®  
Free music player slot: No  
Inputs: Two LINE inputs on 3.5 mm stereo jack or RCA, two MIC/LINE inputs on combined XLR/Jack  
Echo chamber with adjustable delay  
Outputs: One LINE level on 6.35 mm TRS jack  
Battery: 2 x 18 V / 7 Ah NP  
Battery life: 5 hours (average)  
Weight: 24.5 kg  
Dimensions: 615 x 350 x 395mm  
Accessories supplied: Built-in trolley, infrared remote control



**NEW**

**Recept F5**  
UHF receiver 514-542 MHz

Code : H11019



16 selectable frequencies UHF 514-542 MHz.  
Compatible CR25A-COMBO-F5, CR12A-COMBO-F5



**NEW**

**Emet-Hand F5**  
UHF Handheld Microphone 514-542 MHz

Code : H11020



Dynamic hand-held UHF microphone  
16 selectable frequencies (UHF 514-542 MHz) - 35 mW  
Uses two 1.5 V AA batteries (not supplied)  
Compatible CR25A-COMBO-F5, CR12A-COMBO-F5



**NEW**

**Emet-Body F5**  
UHF Headset Transmitter 514-542 MHz

Code : H11021



16 selectable frequencies UHF 514-542 MHz - 35 mW  
Uses two 1.5 V AA batteries (not supplied)  
Compatible CR25A-COMBO-F5, CR12A-COMBO-F5



**NEW**

**Ant F5**  
TNC antenna 514-542 MHz

Code : H11022




# CR12A-COMBO

Le renouveau de la sonorisation tout-terrain  
An off-road system



Available in two frequency ranges :

→F5 for the 500MHz range

→F8 for the 800 MHz range

Please check the authorized frequency bands in your area.

More information on [www.audiophony.com](http://www.audiophony.com)



**800 MHz range**



**CR12A-COMBO-F8**

Battery-powered portable sound system, 120 W RMS with BT, USB reader and two UHF microphones

Code : H10209



**NEW**

**500 MHz range**



**CR12A-COMBO-F5**

Battery-powered portable sound system, 120 W RMS with BT, USB reader and two UHF microphones

Code : H11024



**800 MHz range**



**CR-12AHEADset**

Transmitter + headset microphone for CR12A-COMBO

Code : H10210



**COV-CR12A**

Case for CR12A-COMBO loudspeaker

Code : H10210



Power rating: 120 W (2 channels)  
Loudspeaker: 10" loudspeaker + 1" driver  
Microphones supplied : Two hand-held UHF microphones, 16 selectable frequencies  
Frequency ranges: UHF 823 to 832 MHz and 863 to 865 MHz  
Free UHF microphone slot: No  
Source: USB/SD reader + Bluetooth®  
Free music player slot: No  
Inputs: Two LINE inputs on 3.5 mm stereo jack or RCA, two MIC/LINE inputs on combined XLR/Jack  
Outputs: One LINE level on 6.35 mm TRS jack  
Battery: 2 x 12 V / 5 Ah NP  
Battery life: 6 hours (average)  
Weight: 17.3 kg  
Dimensions: 550 x 340 x 300 mm  
Accessories supplied: Built-in trolley, infrared remote control

Options:  
COV-CR12A (protective cover)  
CR12A-HEADSET (pocket UHF transmitter and headset microphone)

Power rating: 120 W (2 channels)  
Loudspeaker: 10" loudspeaker + 1" driver  
Microphones supplied : Two hand-held UHF microphones, 16 selectable frequencies  
4G-compatible frequency ranges: UHF 514-542 MHz  
Free UHF microphone slot: No  
Source: USB/SD reader + Bluetooth®  
Free music player slot: No  
Inputs: Two LINE inputs on 3.5 mm stereo jack or RCA, two MIC/LINE inputs on combined XLR/Jack  
Outputs: One LINE level on 6.35 mm TRS jack  
Battery: 2 x 12 V / 5 Ah NP  
Battery life: 6 hours (average)  
Weight: 17.3 kg  
Dimensions: 550 x 340 x 300 mm  
Accessories supplied: Built-in trolley, infrared remote control

Options:  
COV-CR12A (protective cover)  
CR12A-HEADSET (pocket UHF transmitter and headset microphone)

Compatible with the CR12A-COMBO portable sound system  
16 selectable frequencies (823-832 and 863-865 MHz) - 10 mW  
Type: Cardioid condenser microphone  
Frequency response: 70 - 18 kHz

# PORTABLE SOUND SYSTEMS



Equipped with an 8-frequency handheld microphone on 823-832/863-865 MHz (MK2 version) equipped with a HF receiver compatible with the 4G telephone network.



**800 MHz range**



## CR80A-COMBO MK2

Bluetooth® portable sound system with USB reader and HF microphone

Code : H10983



Loudspeaker: 6.5" loudspeaker + 1" titanium driver, total impedance: 4 Ohms  
 Power: 80W RMS / 160 max Class D amplifier  
 Frequency response: 80 - 20k Hz  
 Sound pressure level: 113 dB SPL max  
 Microphone:  
 - HF microphone 8 channel UHF  
 - Handheld cardioid-dynamic microphone  
 - Frequency range UHF 823-832 / 863-865 Mhz - 10 mW

Reader Built-in USB key reader and Bluetooth® receiver  
 Supplied with an infrared remote control Bluetooth®:  
 - The player features a Bluetooth® receiver - Type V4.2 AVRCP, with an excellent, close-to-digital audio transmission

Finish:  
 - Polypropylene housing, metal mesh grill.  
 - C36 mounting plate for speaker stands

Dimensions (in mm) 375 x 240 x 210  
 Net weight (incl. batteries) 5,9 kg  
 Internal battery:  
 - Battery 1x DC22,2V 2,2AH Li-ion  
 - Autonomy 5 hours depending on the volume  
 - Charging time 6 hours to recharge the two batteries

Power management:  
 - LED display to indicate the charge level.  
 - Charge it and use it at the same time.  
 - Automatic shutdown if the battery level is too low



MADE IN CHINA  
 Distributed by: BETHOVEN S.A.S  
 Jean Colson - Sot  
 91238 EVRYVILLE - FRANCE



### PPA-121

Powerful professional portable speaker with USB/SD reader, FM, one LINE and two MIC inputs

Code : B00191



Power rating: 250 W (2-way)  
Loudspeaker: 12" loudspeaker + 1.35" driver  
Microphone supplied: No  
Source: USB/SDHC reader + FM tuner  
Inputs: One LINE input on RCA/XLR, two MIC inputs on XLR/jack  
Outputs: 1 LINE level on XL  
Battery: No  
Weight: 15 kg  
Dimensions: 580 x 372 x 315 mm  
Accessories included: Infrared remote control



### PPA-101

Portable sound system, 50 W, with BT, FM, USB/SD reader and two UHF microphones; supplied without battery

Code : B00195



Power rating: 50 W (2-way)  
Loudspeaker: 10" loudspeaker + 1" driver  
Microphones supplied: One hand-held UHF microphone (864,80 MHz) + one headset microphone with Pocket UHF transmitter (864,80MHz)  
Source: USB/SD reader + Bluetooth®+ FM tuner  
Inputs: One LINE input on 3,5 mm stereo jack, RCA or XLR, one MIC input on combined XLR/jack  
Outputs: 1 LINE level on XLR  
Battery: 1x 12 V 7 Ah (optional - code B00198)  
Battery life: 6 hours (average)  
Weight: 15.5 kg without battery  
Dimensions: 550 x 325 x 280 mm  
Accessories supplied: Built-in trolley, 12V car power cable, infrared remote control

Options:  
TOURING BAG-PPA-101 (protective cover)



### Hand-held UHF microphone for PPA-101 (864,80 MHz)

Code : B00197



### Battery for PPA-101

12 V, 7 Ah lead-acid battery

Code : B00198




### TOURING BAG - PPA-101

Protective bag for PPA-101


Code : B00598



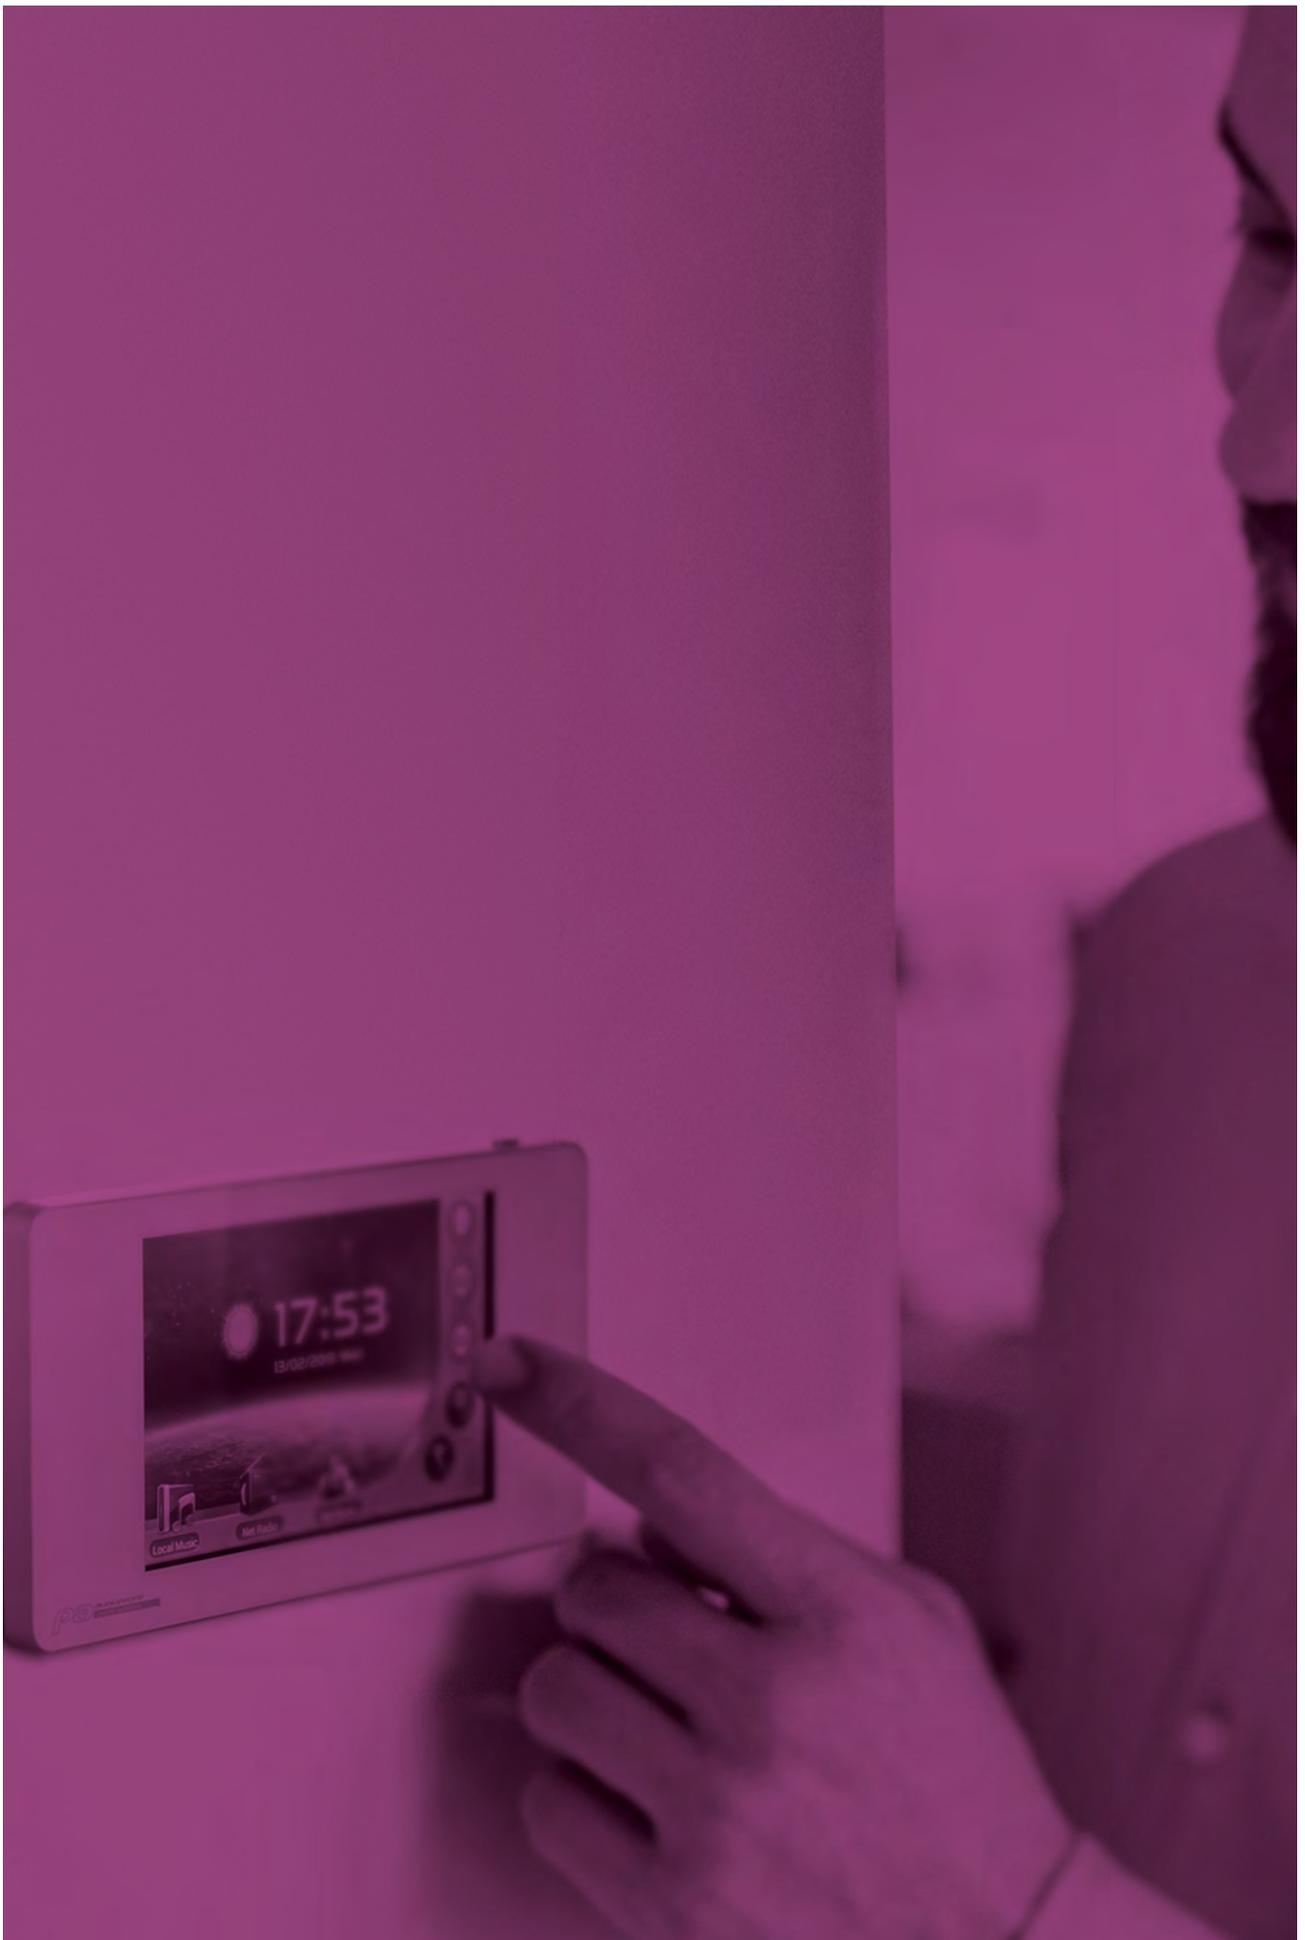

# COMMERCIAL AUDIO

DISTRIBUTION  
AMPLIFIERS  
SOURCES  
MIXERS  
MATRICES  
WEBRADIO  
HEARING LOOP SYSTEMS

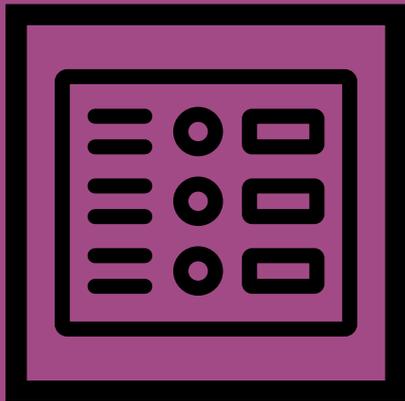

# BROADCASTING



## KIOSK45

Discrete speaker with IP66 45W terminal  
6.5inch 100V- green

Code : H10966



Power outputs : 45W  
Voltage : 100 V  
Components : 1 x 6,5" + 1 x 3"  
Sensitivity (1W/1m): 86 dB, +/-2dB  
Frequency response : 80-10 000 Hz  
Material : Aluminium (Heavy damage proof finish)  
Waterproof level : IP66  
Dimensions : 240 mm (diam) x 440 mm  
Weight : 6 Kg



## STONE45

Discrete rock speaker IP66 45W 6.5inch  
100V- grey

Code : H10967



Power outputs : 45W  
Voltage : 100 V  
Components : 6,5" + 1"  
Sensitivity (1W/1m): 88 dB, +/-3dB  
Frequency response : 80-16 000 Hz  
Material : Aluminium (Heavy damage proof finish)  
Waterproof level : IP66  
Dimensions : 250x360x420 mm  
Weight : 7 Kg



The JAVA, EHP-IP and BORNEO speakers are particularly suitable for their sound qualities which make them ideal tools for diffusing ambient music. The tropicalized finish allows them to be used on terraces as long as they are protected from direct exposure to rain.



## JAVA315b (1 pair)

Tropicalized speaker 6' 100V 7.5-60W/8  
Ohms-white

Code : H10921



Power outputs : 7,5 / 15 W  
Voltage : 100 V 16 Ohms  
Components : 3" + 1"  
Sensitivity (1W/1m): 90 dB, +/-3dB  
Frequency response : 90 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 15W 16Ω // 7,5 / 15 W 100V  
Dimensions : 112x 158 x 160 (H) mm  
Weight : 0,9 Kg



## JAVA315w (1 pair)

Tropicalized speaker 100V 7.5/15W/16  
Ohms - white

Code : H10922



Power outputs : 7,5 / 15 W  
Voltage : 100 V 16 Ohms  
Components : 3" + 1"  
Sensitivity (1W/1m): 90 dB, +/-3dB  
Frequency response : 90 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 15W 16Ω // 7,5 / 15 W 100V  
Dimensions : 112x 158 x 160 (H) mm  
Weight : 0,9 Kg



## JAVA530b (1 pair)

Tropicalized speaker 100V 15-30W/16  
Ohms - black

Code : H10923



Power outputs : 15 / 30 W  
Voltage : 100 V 16 Ohms  
Components : 5" + 1"  
Sensitivity (1W/1m): 88 dB, +/-3dB  
Frequency response : 60 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 30W 16Ω // 15 / 30 W 100V  
Dimensions : 178x 236 x 255 (H) mm  
Weight : 2,38 Kg



## JAVA530w (1 pair)

Tropicalized speaker 100V 15-30W/16  
Ohms - white

Code : H10924



Power outputs : 15 / 30 W  
Voltage : 100 V 16 Ohms  
Components : 5" + 1"  
Sensitivity (1W/1m): 88 dB, +/-3dB  
Frequency response : 60 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 30W 16Ω // 15 / 30 W 100V  
Dimensions : 178x 236 x 255 (H) mm  
Weight : 2,38 Kg

# BROADCASTING



## Borneo660b

Tropicalised installation speaker 60 Watts  
2-way - 8 Ohms/100 V - Black

Code : H9920



Power rating: 60 W RMS  
Available power:  
60 W/20 W/15 W/10 W/5 W  
8 Ohms/100 V  
Tweeter: 1 inch  
Woofer: 6.5 inch  
Frequency response: 45 Hz – 20 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Humidity-resistant tropicalised speaker.  
Dimensions: 340 x 220 x 200 mm  
Net weight: 3.8 kg  
Unit price – Sold by 2pcs




## Borneo660w

Tropicalised installation speaker 60 Watts  
2-way - 8 Ohms/100 V - White

Code : H9911



Power rating: 60 W RMS  
Available power:  
60 W/20 W/15 W/10 W/5 W  
8 Ohms/100 V  
Tweeter: 1 inch  
Woofer: 6.5 inch  
Frequency response: 45 Hz – 20 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Humidity-resistant tropicalised speaker.  
Dimensions: 340 x 220 x 200 mm  
Net weight: 3.8 kg  
Unit price – Sold by 2pcs

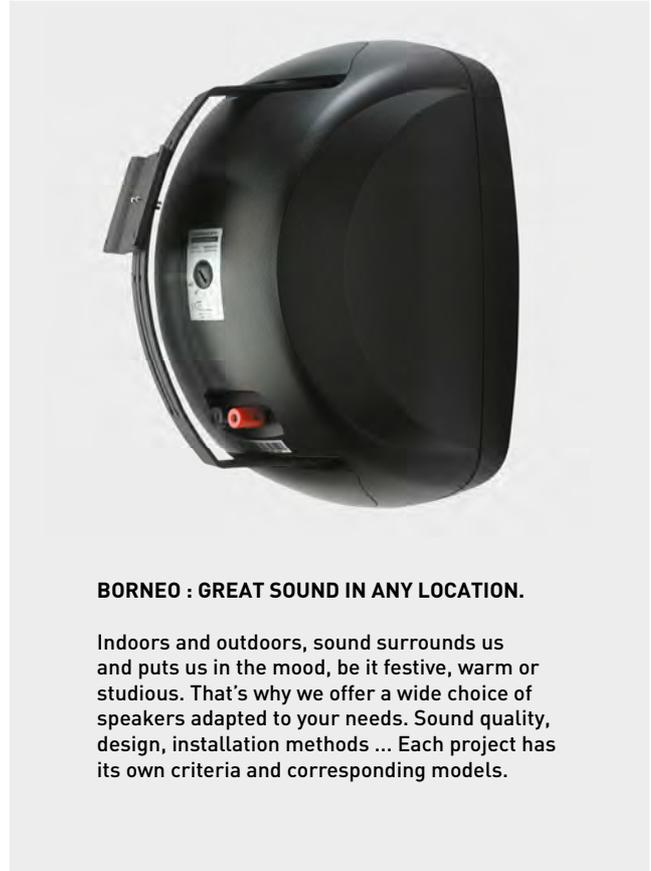

## BORNEO : GREAT SOUND IN ANY LOCATION.

Indoors and outdoors, sound surrounds us and puts us in the mood, be it festive, warm or studious. That's why we offer a wide choice of speakers adapted to your needs. Sound quality, design, installation methods ... Each project has its own criteria and corresponding models.



## EHP660IPb (1 pair)

Tropicalized speaker 6' 100V 7.5-60W/8 Ohms-black

Code : H10919



Power outputs : 7,5 / 15 / 30 / 60 W  
Voltage : 100 V 8 Ohms  
Components : 6,5" + 1"  
Sensitivity (1W/1m): 90 dB, +/-3dB  
Frequency response : 70 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 60W 8Ω // 7,5 / 15 / 30 / 60 W 100V  
Dimensions : 214x178 x 329 (H) mm  
Weight : 4,7 Kg



## EHP660IPw (1 pair)

Tropicalized speaker 6' 100V 7.5-60W/8 Ohms-white

Code : H10920



Power outputs : 7,5 / 15 / 30 / 60 W  
Voltage : 100 V 8 Ohms  
Components : 6,5" + 1"  
Sensitivity (1W/1m): 90 dB, +/-3dB  
Frequency response : 70 - 20 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Wallmount bracket  
Connectors : Waterproof cable on gland IP55  
Power rotary knob : 60W 8Ω // 7,5 / 15 / 30 / 60 W 100V  
Dimensions : 214x178 x 329 (H) mm  
Weight : 4,7 Kg



## EHP420IPb

Tropicalized speaker 4' 100V 2-20W/8 Ohms-black

Code : H10917



Power outputs : 2,5 / 5 / 10 / 20 W  
Voltage : 100 V 8 Ohms  
Components : 4" + 1"  
Sensitivity (1W/1m): 88 dB, +/-3dB  
Frequency response : 90-18 000 Hz  
Material : Plastic enclosure and aluminium grille  
Holding : Lyre d'accroche murale  
Connectors : Câble sur presse étoupe étanche IP55  
Power rotary knob : 20W 8Ω // 2,5 / 5 / 10 / 20 W 100V  
Dimensions : 158x129 x 238 (H) mm  
Weight : 2,4 Kg



## EHP420IPw

Tropicalized speaker 4' 100V 2-20W/8 Ohms-white

Code : H10918



Power output: 2.5/5/10/20W  
Power supply: 100V 8 ohms  
Components: 4 + 1  
Sensitivity (1W/1m): 88dB, +/-3dB  
Frequency response: 90 - 18,000Hz  
Material: white ABS enclosure and metallic grille  
Mounting: wall-mount yoke  
Connectors: waterproof cable on gland IP55  
Power selector: 20W 8Ω // 2.5/5/10/20W 100V  
Dimensions: 158x129 x 238 (H) mm  
Weight: 2.4kg

# BROADCASTING



## EHP880B

Installation speaker 80 Watts  
2-way - 8 Ohms/70 V/100 V - Black

Code : H10212



Power rating: 80 W RMS  
Available power: 80 W/40 W/20 W at 100 V - 40 W/20 W/10 W at 70 V  
80 W at 8 Ohms  
Tweeter: 1"  
Woofer: 8"  
Frequency response: 70 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 92 dB  
Attachment: swivel bracket  
Dimensions: 410 x 290 x 240 mm  
Net weight: 8 kg  
Unit price - Sold by 2pcs



## EHP880W

Installation speaker 80 Watts  
2-way - 8 Ohms/70 V/100 V - White

Code : H10213



Power rating: 80 W RMS  
Available power: 80 W/40 W/20 W at 100 V - 40 W/20 W/10 W at 70 V  
80 W at 8 Ohms  
Tweeter: 1"  
Woofer: 8"  
Frequency response: 70 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 92 dB  
Attachment: swivel bracket  
Dimensions: 410 x 290 x 240 mm  
Net weight: 8 kg  
Unit price - Sold by 2pcs



## EHP520b

Installation speaker 40 Watts  
2-way - 8 Ohms/70 V/100 V - Black

Code : H9763



Power rating: 40 W RMS  
Available power: 40 W/20 W/10 W at 100 V - 20 W/10 W/5 W at 70 V  
40 W at 8 Ohms  
Tweeter: 1 inch  
Woofer: 5 inch  
Frequency response: 80 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Dimensions: 270 x 187 x 165 mm  
Net weight: 3.4 kg  
Unit price - Sold by 2pcs



## EHP520w

Installation speaker 40 Watts  
2-way - 8 Ohms/70 V/100 V - White

Code : H9762



Power rating: 40 W RMS  
Available power: 40 W/20 W/10 W at 100 V - 20 W/10 W/5 W at 70 V  
40 W at 8 Ohms  
Tweeter: 1"  
Woofer: 5"  
Frequency response: 80 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Dimensions: 270 x 187 x 165 mm  
Net weight: 3.4 kg  
Unit price - Sold by 2pcs



## EHP410b

Installation speaker 20 Watts  
2-way - 8 Ohms/70V/100V - Black

Code : H9761



Power rating: 20 W RMS  
Available power: 20 W/10 W/5 W at 100 V - 10 W/5 W/2.5 W at 70 V  
20 W at 8 Ohms  
Tweeter: 1"  
Woofer: 4"  
Frequency response: 80 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Dimensions: 240 x 170 x 160 mm  
Net weight: 1.45 kg  
Unit price - Sold by 2pcs



## EHP410w

Installation speaker 20 Watts  
2-way - 8 Ohms/70 V/100 V - White

Code : H9760



Power rating: 20 W RMS  
Available power: 20 W/10 W/5 W at 100 V - 10 W/5 W/2.5 W at 70 V  
20 W at 8 Ohms  
Tweeter: 1"  
Woofer: 4"  
Frequency response: 80 Hz - 18 kHz  
Sensitivity (1 W @ 1 m): 89 dB  
Attachment: swivel bracket  
Dimensions: 240 x 170 x 160 mm  
Net weight: 1.45 kg  
Unit price - Sold by 2pcs



## ROT45b

Black swivel ball mount for speakers  
EHP410b and EHP520b - 1 piece

Code : H9824



## ROT45w

White swivel ball mount for speakers  
EHP410w and EHP520w - 1 piece

Code : H9825



# BROADCASTING



## SpeakUP

Active lectern 40 W + MP3 / record + HF microphone

Code : H10830



Amplified column lectern with VHF mic.  
Built-in amplifier 40 W RMS.  
Comes with 1 gooseneck microphone and 1 VHF hand-held microphone with in-built receiver.  
1 MP3 reader/recorder module: USB/SD/MMC  
1 XLR microphone input.  
1 RCA auxiliary input.  
3 full-range loudspeakers.  
Frequency response: 100 Hz – 16 kHz  
1 recording output or 0dB line (6.35 mm jack).  
Power: 240 V 50/60 Hz  
Dimensions: 1140 x 580 x 420 mm  
Weight: 17.2 kg



Equipped with a USB/SD reader/recorder, the Speakup allows you to animate meetings and debates with its VHF microphone and to take advantage of digital media thanks to its USB charger.



## OHO-350b (pair)

Spherical satellite speaker 50 W RMS  
2-way - Black

Code : H10125



Power rating: 50 W RMS  
Frequency response: 100 Hz - 25 KHz  
Sensitivity (1 W @ 1 m): 89 dB  
Nominal impedance: 8 Ohms  
Tweeter: 1 inch  
Woofer: 3 inch  
Connector: Terminal block integrated in the magneticbracke  
Dimensions: 99 mm diameter  
Weight: 0.7 kg  
Price for the pair



## OHO-350w (pair)

Spherical satellite speaker 50 W RMS  
2-way - White

Code : H10124



Power rating: 50 W RMS  
Frequency response: 100 Hz - 25 KHz  
Sensitivity (1 W @ 1 m): 89 dB  
Nominal impedance: 8 Ohms  
Tweeter: 1 inch  
Woofer: 3 inch  
Connector: Terminal block integrated in the magneticbracke  
Dimensions: 99 mm diameter  
Weight: 0.7 kg  
Price for the pair




## MIO-Sat225b (pair)

Wall speaker on adjustable mount, Hi-Fi speaker - 8 Ohms - 25 W

Code : H10150



Power rating: 25 W RMS  
Frequency response: 200 Hz - 15 KHz  
Maximum SPL (@ 1 m): 110 dB  
Nominal impedance: 8 Ohms  
Speaker: 2 x 2.75 inches  
Connector: Terminal block integrated in bracket  
Dimensions: 90 x 136 x 180 mm  
Weight: 0.950 kg  
Price for the pair

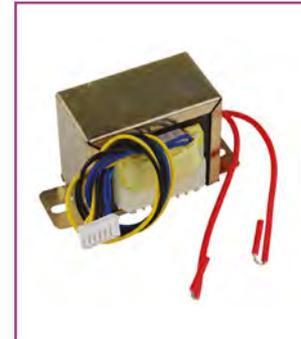

## TFS60

60W Transformer Input 7.5/15/30/60w in  
100v out 80hms

Code : H10976

## TFS20

Transformer 20W Input 2.5/5/10/20w in  
100v out 80hms

Code : H10975

# BROADCASTING



## CHPsub

Ceiling recessed subwoofer  
60 W / 8 Ohms – 60 W / 100 V

Code : H10533



Power rating: 60 W RMS  
Available power:  
60 W at 8 Ohms  
60 W / 40 W / 20 W at 100 V  
Frequency response: 80 Hz - 200 Hz  
Woofer: 8 inch  
Sensitivity (1 W @ 1 m): 95 dB  
Enclosed metal box  
Integrated passive filter  
External dimensions (diameter and depth):  
295 x 215 mm  
Drilling diameter: 265 mm  
Net weight: 5 kg



## CHF860

Hi-Fi ceiling recessed speaker 60 Watts  
2-way - 8 Ohms

Code : H9909



2-way speaker  
Power rating: 60 W RMS  
Impedance: 8 Ohms  
Tweeter: 1 inch  
Woofer: 6.5 inch  
Frequency response: 40 Hz - 20 kHz  
Sensitivity (1W/1m)  
External dimensions (diameter and depth):  
280 x 180 mm 90 dB  
Drilling diameter: 247 mm  
Net weight: 2.48 kg



## CHF835

2-way ceiling light 35W 8inch 80hms  
80hms

Code : H10965



Power outputs : 35W RMS  
Impedance: 8 Ohms  
Components : 8" + 1"  
Sensitivity (1W/1m): 86 dB, +/-3dB  
Frequency response : 55-20 000 Hz  
Material : white plastic enclosure and magnetic grille  
Holding : 4 mouting clamp  
Dimensions : 260(diam) x 100 (H) mm  
Weight : 1,40 Kg



## CHP6A-Bset

Ceiling lights 6.5 inches active 2x10w  
BT 4.0

Code : H10933



Power outputs : 10W  
Impedance: 8 Ohms  
Components : 6.5"  
Sensitivity (1W/1m): 90 dB, +/-2dB  
Frequency response : 110-15 000 Hz  
Material : White plastic enclosure  
Holding : 2 string grip  
Connectors: Euro block  
Bluetooth: 4.0  
Dimensions : 190 mm (diam) x 105 mm  
Weight : 1 Kg  
Set of two ceiling speakers, one of which is active (with Bluetooth® receiver) and powers the other (passive).

## HIGH-QUALITY VOICE AND MUSIC

The CHP835 ceiling speaker features a 2-way coaxial speaker producing a very pure sound even at low volume.

The tweeter is incredibly efficient at transmitting a clear vocal reproduction.



## CHP660

Ceiling recessed speaker  
2-way - 60 W / 8 Ohms - 10 W / 100 V

Code : H9910



Power rating: 60 W RMS  
Available power:  
60 W at 8 Ohms  
10 W / 5 W / 2.5 W / 1.25 W at 100 V  
Tweeter: 1 inch  
Woofer: 6.5 inch  
Frequency response: 56 Hz - 20 kHz  
Sensitivity (1 W @ 1 m): 90 dB  
External dimensions (diameter and depth):  
240 x 140 mm  
Drilling diameter: 208 mm  
Net weight: 1.75 kg



## CHP630

Ceiling speaker 2-way 6" ABS white

Code : H10915



Power: 30W  
Available power: 100 V 8 Ohms  
Components: 6.5" + 3/4"  
Sensitivity (1W/1m): 89 dB, +/- 3dB  
Frequency response: 90-20 000 Hz  
Construction: White ABS body  
Hook: 4 screwed tabs  
Dimensions: 220 x 220 x 220 x 95 mm  
Weight: 980 g



## CHP630GB

Black ceiling grille for CHP630

Code : H10989





### CHP630SQ

Square ceiling speaker 2-way 6" ABS white

Code : H10974



Power: 30W RMS  
 Available power: 100 V 8 Ohms  
 Components: 5" + 0.5" + 0.5"  
 Sensitivity (1W/1m): 89 dB, +/- 3dB  
 Frequency response: 90-20 000 Hz  
 Construction: White ABS body  
 Hook: 4 screwed tabs  
 Dimensions: 220 x 220 x 220 x 95 mm  
 Weight: 980 g



### CHP620

Ceiling recessed speaker  
 2-way 20 W / 100 V

Code : H9757



Power rating: 20 W RMS  
 Available power:  
 20 W / 10 W at 100 V  
 Tweeter: 1.5 inch  
 Woofer: 6.5 inch  
 Frequency response: 85 Hz - 18 kHz  
 Sensitivity (1 W @ 1 m): 98 dB  
 External dimensions (diameter and depth):  
 233 x 118 mm  
 Drilling diameter: 200 mm  
 Net weight: 1.7 kg



### CHP610

Ceiling recessed speaker  
 2-way 10 W / 100 V

Code : H9756



Power rating: 10 W RMS  
 Available power:  
 10 W / 5 W / 2.5 W at 100 V  
 Tweeter: 1.5 inch  
 Woofer: 6.5 inch  
 Frequency response: 56 Hz - 20 kHz  
 Sensitivity (1 W @ 1 m): 93 dB  
 External dimensions (diameter and depth):  
 230 x 90 mm  
 Drilling diameter: 200 mm  
 Net weight: 1.4 kg



### CHP606

Ceiling recessed double cone speaker  
 6 W / 100 V

Code : H9755



Power rating: 6 W RMS  
 Available power:  
 6 W / 3 W at 100 V  
 Speaker: double cone 6.5 inches  
 Frequency response: 110 Hz - 13 kHz  
 Sensitivity (1 W @ 1 m): 90 dB  
 External dimensions (diameter and depth):  
 230 x 90 mm  
 Drilling diameter: 200 mm  
 Net weight: 0.9 kg



### CHP520SQ

2-way square ceiling speaker 5" ABS white  
 100V 5/10/20W

Code : H10916



Power outputs: 5 / 10 / 20 W  
 Voltage: 100 V / 8 ohms  
 Components: 4" + 1/2"  
 Sensitivity (1W/1m): 89 dB, +/-3dB  
 Frequency response: 90-18 000 Hz  
 Material: White plastic enclosure and metallic grille  
 Holding: 4 mouting clamp  
 Connectors: 4 contacts connector  
 Drill hole dimensions: 156 x 156 mm  
 Dimensions: 190 x 190 x 80 (H) mm  
 Weight: 1,3 Kg



### CHP520

2-way ceiling speaker 5" 100V 5/10/20W

Code : H10914



Power outputs: 5 / 10 / 20 W  
 Voltage: 100 V / 8 ohms  
 Components: 5" + 3/4"  
 Sensitivity (1W/1m): 88 dB, +/-3dB  
 Frequency response: 100-20 000 Hz  
 Material: Black plastic enclosure and white magnetic grille  
 Holding: 3 mouting clamp  
 Connectors: 4 contacts connector  
 Drill hole diameter: 180mm  
 Dimensions: 203(diam) x 85 (H) mm  
 Weight: 1.5 Kg



### CHP520GB

Black ceiling grille for CHP520

Code : H10988



### CHP506

Ceiling speaker 5" double speaker cone  
 ABS white 100V 3/6W

Code : H10912



Power outputs: 3 / 6 W  
 Voltage: 100 V  
 Components 5" loud-speaker  
 Sensitivity (1W/1m): 93 dB, +/-3dB  
 Frequency response: 100-15 000 Hz  
 Material: Metallic grille and plastic enclosure  
 Holding: 2 string grip  
 Connectors: 3 contacts connector  
 Drill hole diameter: 145mm  
 Dimensions: 160(diam) x 54 (H) mm  
 Weight: 500 g

# BROADCASTING



## SHP510

Suspended aluminium speaker IP55  
10 W / 100 V

Code : H9758



Power rating: 10 W RMS  
Available power:  
10 W / 5 W / 2.5 W at 100 V  
Frequency response: 150 Hz – 15 kHz  
Speaker: 5 inch  
Sensitivity (1 W @ 1 m): 90 dB  
White aluminium body,  
Ingress protection: IP55 (weather-resistant)  
Dimensions (Ø x D): 138 x 205 mm  
Weight: 2.2 kg



## SHP820w

Suspended 2-way 8' diff. 360°-100V 5-20W

Code : H10925



Power outputs : 5 / 10 / 20 W  
Voltage : 100 V  
Components : 8" + 1"  
Sensitivity (1W/1m): 88 dB, +/-3dB  
Frequency response : 130-15 000 Hz  
Material : White plastic enclosure  
Holding : 5 m slung cable  
Connectors : Cable on gland  
Dimensions : 254 mm (diam)  
Weight : 2,2 kg



## PHP510

Aluminium sound projector IP55  
10 W / 100 V

Code : H9759



Power rating: 10 W RMS  
Available power:  
10 W / 5 W / 2.5 W at 100 V  
Frequency response: 150 Hz – 14 kHz  
Speaker: 5 inch  
Sensitivity (1 W @ 1 m): 90 dB  
White aluminium body,  
Ingress protection: IP55 (weather-resistant)  
Dimensions (Ø x D): 138 x 205 mm  
Weight: 2.1 kg



## PHP650

Sound projector IP55  
50 W / 100 V

Code : H10211



Power rating: 50 W RMS  
Available power:  
50 W/25/12.5/9/4.5/2.6 at 100 V  
Frequency response: 90 Hz – 20 kHz  
Speaker: 6.5 inches and 1-inch  
compression  
Sensitivity (1 W @ 1 m): 99 dB  
ABS body,  
Ingress protection: IP55 (weather-resistant)  
Dimensions: 363 x 253 x 310 mm  
Weight: 3.9 kg




## INTERIOR / EXTERIOR

High power and wide roof to cover a large area. The PHP650 sound projector offers a very good reproduction of voice and music. Robust and weatherproof.

# BROADCASTING

The columns are delivered with wall mounting brackets.

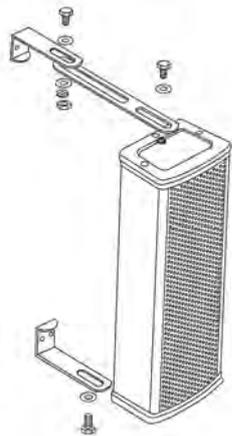

Aluminium speakers are designed to resist humidity. The wiring is mounted on a cable gland to ensure the waterproofing.

The multi-speaker system columns allows a diffusion very wide while reducing the vertical angle. This prevents echoes. The column is therefore the ideal tool for speeches in big spaces.



**CLS220**  
2-speakers column  
100 V - 10/20 W

---

Code : H10514

---



Power rating: 20 W RMS  
Available power:  
20 W / 10 W at 100 V  
Speaker: 2 x 2.5 inches  
Frequency response: 250 Hz -15 KHz  
Sensitivity (1 W @ 1 m): 94 dB  
Aluminium body and grill,  
Ingress protection: IP44 (weather-resistant)  
Dimensions: 104 x 73 x 262 mm  
Weight: 1.4 kg



**CLS440**  
4-speakers column  
100 V - 20/40 W

---

Code : H10515

---



Power rating: 40 W RMS  
Available power:  
40 W / 20 W at 100 V  
Speaker: 4 x 2.5 inches  
Frequency response: 250 Hz -15 KHz  
Sensitivity (1 W @ 1 m): 95 dB  
Aluminium body and grill,  
Ingress protection: IP44 (weather-resistant)  
Dimensions: 104 x 73 x 402 mm  
Weight: 1.94 kg



**CLS660**  
6-speakers column  
100 V - 30/60 W

---

Code : H10516

---



Power rating: 60 W RMS  
Available power:  
60 W / 30 W at 100 V  
Speaker: 6 x 2.5 inches  
Frequency response: 250 Hz -15 KHz  
Sensitivity (1 W @ 1 m): 96 dB  
Aluminium body and grill,  
Ingress protection: IP44 (weather-resistant)  
Dimensions: 104 x 73 x 550 mm  
Weight: 2.6 kg



**CLS880**  
8-speakers column  
100 V - 40/80 W

---

Code : H10517

---



Power rating: 80 W RMS  
Available power:  
80 W / 40 W at 100 V  
Speaker: 8 x 2.5 inches  
Frequency response: 250 Hz -15 KHz  
Sensitivity (1 W @ 1 m): 97 dB  
Aluminium body and grill,  
Ingress protection: IP44 (weather-resistant)  
Dimensions: 104 x 73 x 690 mm  
Weight: 3.34 kg

# AMPLIFIERS



★★★★★



★★★★★



## AMP120

Amplifier 120W – 8 Ohms/70/100 V

Code : H9903



RMS power: 120 W  
 Output levels / Impedance:  
 - 100 V [83 Ohms]  
 - 70 V [42 Ohms]  
 - 4 Ohms [21.9 V]  
 Balanced XLR input/output  
 Power output on Phoenix plug  
 Frequency response: 70 Hz – 18 KHz  
 T.H.D (1 KHz): <1%  
 400 Hz High-pass filter  
 Power supply: 230 V 50/60 Hz  
 - DC24V (safe power)  
 Dimensions: 482 x 88 x 330 mm  
 19-inch rackable, Height: 2 units  
 Net weight: 11.6 Kg

## AMP240

Amplifier 240 W – 8 Ohms/70/100 V

Code : H9904



RMS power: 240 W  
 Output levels / Impedance:  
 - 100 V [42 Ohms]  
 - 70 V [21 Ohms]  
 - 4 Ohms [31 V]  
 Balanced XLR input/output  
 Power output on Phoenix plug  
 Frequency response: 70 Hz – 18 KHz  
 T.H.D (1 KHz): <1%  
 400 Hz High-pass filter  
 Power supply: 230 V 50/60 Hz  
 - DC24V (safe power)  
 Dimensions: 482 x 88 x 330 mm  
 19-inch rackable, Height: 2 units  
 Net weight: 13.8 Kg



★★★★★



★★★★★



## AMP480

1-way amplifier  
 1 x 480 W at 100 V

Code : H10512



1 mono input via Phoenix plug  
 1 100V output via Phoenix plug  
 1 line level link output via Phoenix plug  
 Channel volume adjustment  
 Flat/HPF channel switch  
 Output level display via 4 LED VU meters  
 Access to installer settings (via screwdriver)  
 Power supply: 230 V 50/60 Hz  
 Frequency response: 50 Hz - 15 kHz  
 T.H.D (1 kHz nominal power): 0.1%  
 Dimensions: 380 x 088 x 482 mm  
 19-inch rackable, Height: 2 units  
 Weight: 6.6 kg



## REG60

Remote volume adjuster in wall box – 60 W

Code : H9753



Power: 60 W / 100 V  
 24 V Priority input  
 Settings: Off/-17 dB/-11 dB/-4.5 dB/0 dB  
 Frequency response: 20 Hz - 20 kHz  
 White ABS body  
 Fixing: REG-BOX (optional)  
 Connection: 6-pin connector  
 (IN+ IN- / OUT+ OUT- / 0 V 24 V)  
 Dimensions: 86 x 86 x 70 mm  
 Weight: 0.250 kg.



## REG-BOX

Recessed box for wall adjuster REG60

Code : H9754



# AMPLIFIERS



NEW



<p><b>AMP4120MKII</b> 4-way amplifier 4 x 120 W at 100 V</p> <p>Code : H11070</p> 	<p><b>AMP4240MKII</b> 4-way amplifier 4 x 240 W at 100 V</p> <p>Code : H11071</p> 
---	---

4 mono inputs via Phoenix plug  
4 100 V outputs via Phoenix plug  
4 line level link outputs via Phoenix plug  
Volume adjustment for each channel,  
Flat/HPF switch for each channel  
Output level display for each channel via  
4 LED VU meters  
Access to installer settings  
Power supply: 230 V 50/60 Hz  
Frequency response: 50 Hz - 15 kHz  
T.H.D (1 kHz nominal power): 0.1%  
Dimensions: 390 x 088 x 482 mm  
19-inch rackable, Height: 2 units  
Weight: 7.2kg

4 mono inputs via Phoenix plug  
4 100 V outputs via Phoenix plug  
4 line level link outputs via Phoenix plug  
Volume adjustment for each channel,  
Flat/HPF switch for each channel  
Output level display for each channel via  
4 LED VU meters  
Access to installer settings  
Power supply: 230 V 50/60 Hz  
Frequency response: 50 Hz - 15 kHz  
T.H.D (1 kHz nominal power): 0.1%  
Dimensions: 390 x 088 x 482 mm  
19-inch rackable, Height: 2 units  
Weight: 7.5 kg

## 4-CHANNEL PROFESSIONAL AMPLIFIER

- + Compact and lightweight design
- + Technician settings at the rear



**WIDE-OPEN SPACES**



**IN THE SHOP**



# AMPLIFIERS

WICASTamp is an amplified audio transmitter capable of transforming your passive speakers into a multi-room sound system thanks to your WI-FI network.

## Great sound in every room

For multi-room use, you must have one WICASTamp per room with one passive speaker (or a pair of passive speakers).

Send sound from streaming services from your computer or your phone.

The MUZO PLAYER application allows you to control everything.



NEW



### WICASTPLAY

Multiroom audio system

Code : H10996



NEW



### WICASTAMP

Amplified multi-room audio system

Code : H10995



1x mini-jack output 3.5 mm analog  
Powered by a 5 V Micro USB connector  
300mA of consumption only  
Compatible with AirPlay and major streaming service  
USB & SD drive  
Alarm clock function  
Programmed stop function

Impedance 8 Ohms  
2 x 15 W RMS (amplification included)  
1x mini-jack input 3.5 mm analog  
External powered 15 V DC - 2 A  
Compatible with AirPlay and major streaming services  
USB and SD drive  
Alarm clock function  
Programmed stop function

## COMPATIBLE WITH MUSIC STREAMING SERVICE

TIDAL

Spotify

napster

qobuz

# AMPLIFIERS



Bluetooth™

## WALLAMPtouch

Touch screen 2x10W touch screen SD/BT/ Radio/AUX

Code : H10931



Power ratings: 2x10W  
Impedance: 8 Ohms  
Power supply: 240 V  
Frequency response: 20 - 20 000 kHz  
Output: Line output for external amplifier  
Port: SD, USB  
Audio format: MP3, WMA, WAV, AAC, FLAC  
Infrared remote control  
Bluetooth®: 4.1  
Dimensions: 86 x 86 x 86 x 38 mm



Bluetooth™

## WALLAMPpad

Touch screen 2x20W tactile SD/BT/AUX/ DLNA/Airplay&App

Code : H10932



Power : 2X20W  
Impedance: 8 Ohms  
240V power supplies  
Frequency response: 20 - 20 000 Hz  
Aux output for an external amplifier  
Port: SD/ RJ45  
Sources: Bluetooth® 4.0 / DLNA / Airplay / WIFI / Webradio / Network music / Application / Aux in  
Dimensions: 172 x 86 x 45 mm



Bluetooth™

## WALLKIT

WALLAMPmedia + ceiling lights set

Code : H10964



Wall amplifier set  
WALLAMPmedia 2 x 10W with 2x 2-way ceiling speakers  
240V power supply  
Frequency response: 20 - 20 000 Hz  
Impedance: 8 Ohms  
Components: 6.5" + 0.75" + 6.5  
Sensitivity. (1W/1m) : 103 dB, +/-2dB  
Frequency response: 90-18 000 Hz  
Construction: Black ABS body and white magnetic metal grid  
Hook: 2 legs. spring  
Dimensions: 190 mm (diameter) x 105 mm  
Weight: 1 Kg



Bluetooth™

## WALLAMPmedia

Wall amplifier 2x10W USB/SD/BT/Radio/ AUX

Code : H10930



Power outputs: 2x10W  
Impedance: 8 Ohms  
Power supply: 240 V  
Signal-to-noise ratio: 81 dB →81 dB  
Output: Line output for external amplifier  
Memory card capacity: 128 MB - 32GB  
Audio format: MP3, WMA, WAV, AAC, FLAC  
Bluetooth: 2.1+EDR  
Dimensions: 86 x 86 x 86 x 38 mm  
Infrared remote control

Bluetooth™



## SIMPLE AND INTUITIVE MUSICAL CONTROL

Broadcast music with just a few taps. Play a song from any audio source through the USB/SD/BT/FM/AUX. Thanks to its line output for an external amplifier, you can broadcast music in several rooms.



Flush-mounted box compatible with WALLAMPtouch and WALLAMPmedia

H10637 - PILOTBOX - Square back box 47 mm steel  
H10638 - PILOTSCREW - Steel screw size M3.5x20 - 1 piece

# AMPLIFIERS



## COMBO240

Multi-zone combined mixer amplifier line  
100V combo 5 zones 6 inputs - 240W

Code : H9751



All-in-one 240W system with multimedia option  
6-input mixer  
5 independent simultaneous zones  
7-band graphic equalizer  
Paging, siren and chime control  
Priority mode and Phantom power on channels 1 and 2  
5-pin DIN input microphone  
XLR line or microphone input on channels 2 to 5  
RCA input on channel 6  
Paging input on Phoenix plug  
AMP IN and PRE-AMP OUT connections  
LINK IN and LINK OUT connections  
100 V / 8 to 4 Ohms outputs on the terminal block  
Dimensions: 420 x 320 x 88 mm  
19-inch rackable  
Weight: 10.8 kg

Optional:

### MOD1

USB/SD reader module and AM/FM  
Tuner receiver for COMBO240



### MOD1

USB/SD reader module and AM/FM Tuner  
receiver for COMBO240

Code : H9752



Tuner receiver: AM / FM  
Autoscan, Manual scan  
FM frequencies: 87.5 MHz - 108 MHz  
AM frequencies: 522 kHz - 1620 kHz  
USB reader: mp3 files  
Functions: read, search, programming  
Recognition of more than 2000 files and  
200 folders.  
Equalisation: Classic / Pop / Jazz / Rock  
with the LOUD function  
Technical characteristics:  
Signal-to-noise ratio: Less than 70 dB  
Frequency response: 20 Hz - 20 kHz  
THD: Less than 0.1%  
Maximum consumption: 500 mA



- All-in-one system with multimedia option
- 6-input mixer
- 5 Switchable zones
- 7-band graphic equaliser
- Paging and chime control
- 19-inch rackable
- Removable brackets



★★★★★



★★★★★



### MOD1

USB/SD reader module and AM/FM Tuner  
receiver for COMBO240

Code : H9752



Tuner receiver: AM / FM  
Autoscan, Manual scan  
FM frequencies: 87.5 MHz - 108 MHz  
AM frequencies: 522 kHz - 1620 kHz  
USB reader: mp3 files  
Functions: read, search, programming  
Recognition of more than 2000 files and  
200 folders.  
Equalisation: Classic / Pop / Jazz / Rock  
with the LOUD function  
Technical characteristics:  
Signal-to-noise ratio: Less than 70 dB  
Frequency response: 20 Hz - 20 kHz  
THD: Less than 0.1%  
Maximum consumption: 500 mA



## MIC-DESK

Announcement microphone fitted with  
'push to talk' system

Code : H9748



Dynamic capsule  
Frequency response: 40 Hz to 16 kHz  
Sensitivity: -43 dB  
Impedance: 200 Ohms  
Comes with:  
1 XLR 5-pin female / DIN 5-pin male  
5 m cable.  
1 XLR 5-pin female / 6.35 mm mono  
Jack male 3 m cable.  
Dimensions: 430 x 200 x 75 mm  
Weight: 1.05 kg

# AMPLIFIERS



## COMBO60

Multimedia combined mixer/amplifier/reader line 100V 60W Tuner and USB reader

Code : H9749



60W compact all-in-one system  
 3-input mixer:  
 2-way microphone - Aux1/MP3/TUNER  
 Low, mid and high settings  
 Mp3 and Tuner player controls  
 Output level VU meter  
 6.35 input jack for microphones  
 AUX input and CD on RCA  
 Waiting music input on Phoenix plug  
 Paging input on Phoenix plug  
 Connections for FM and AM antennas  
 100 V / 16 / 8 / 4 Ohms outputs on the terminal block  
 Tuner receiver: AM / FM  
 Autoscan, Manual scan  
 FM frequencies: 87,5 MHz - 108 MHz  
 AM frequencies: 522 kHz - 1620 kHz  
 USB reader: mp3 files  
 Functions: read, search, programming time setting  
 Power: 220 V 50-60 Hz  
 Consumption: 175 W  
 Dimensions: 90 x 270 x 260 mm  
 Net weight: 5 kg



- Compact all-in-one system
- Integrated USB reader and tuner
- Microphone input and 2 line inputs
- Paging and waiting music compatible
- Priority safety output
- 3-band equalizer



## COMBO130

Multimedia combined mixer/amplifier/reader line 200V 130W Tuner and USB reader

Code : H9750



130W all-in-one system  
 5-input mixer:  
 3-way microphone - Aux1/MP3/TUNER -Aux2  
 Low and high settings  
 Mp3 and Tuner player controls  
 Chime activation  
 Output level VU meter  
 6.35 input jack for microphones 1 and 2  
 RCA input for AUX1 and AUX2  
 OUT output on RCA  
 Connections for FM and AM antennas  
 100 V / 16 to 4 Ohms outputs on the terminal block  
 Tuner receiver: AM / FM  
 Autoscan, Manual scan  
 FM frequencies: 87,5 MHz - 108 MHz  
 AM frequencies: 522 kHz - 1620 kHz  
 USB reader: mp3 files  
 Functions: read, search, programming time setting  
 Power: 220 V 50-60 Hz  
 Consumption: 175 W  
 Dimensions: 483 x 89 x 366 mm  
 Net weight: 11.36 kg



- All-in-one system
- 5-input mixer
- Push-button chimer
- 19-inch rackable
- 70 V/100 V amplified output or low impedance
- 1 front-panel microphone input



# AMPLIFIERS

## MULTI-ZONE MIXER/AMPLIFIER BY EXCELLENCE

Resolutely focused on professional installations, the ZONEAMP4120 system offers 4 mono mic/line inputs and 4 stereo inputs. Each input can be independently routed to the zone of your choice. Compatible with WP1 wall controller and MIC-DESK4 desk.



### ZONEAMP4120

8 channels and 4 120W outputs at 100V  
Amplified mixer

Code : H10513



- 4 Mic/Line inputs on XLR/6.35 Jack (TRS)
- 4 stereo inputs on RCA or 6.35 Mono Jack
- 4 link out outputs per zone on Phoenix plug
- 4 120W at 100V outputs on Phoenix plug
- Microphone priority on input 1
- Phantom power on inputs 1 to 4
- Gain and tone control (3 bands) on channels 1 to 4
- Gain control on all inputs
- Tone control (2 bands) per zone
- 5 RJ45 connectors to connect 1x WP-1 per zone and to connect 1x MIC-DESK4
- General Mute key
- Zone allocation 1 to 4 on each input
- Signal / Peak display on each input
- 5 LED VU meters per zone
- AFL / PFL front panel HP monitoring
- Power supply: 230 V 50/60 Hz
- Frequency response: 20 Hz - 20 kHz
- Dimensions: 320 x 088 x 482 mm
- 19-inch rackable, Height: 2 units
- Weight: 9 kg




### 8 INPUTS

Each input can be routed to your chosen zone or zones.  
Installer settings are accessible with a screwdriver.



### 4 OUTPUTS

The ZONEAMP4120 is equipped with a monitoring loudspeaker to verify the signal sent to each output.

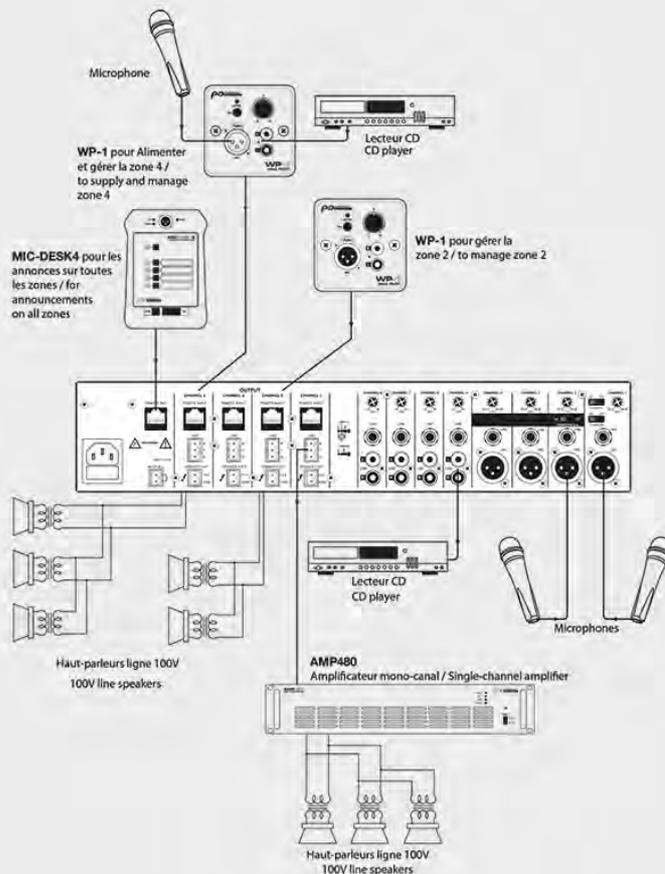

### RJMF10

RJ45 M/F cable 10cm

Code : H10929



### WP-1

Wall-mounted controller for ZONEAMP4120 or PREZONE444

Code : H10508



### MIC-DESK4

Microphone for ZONEAMP4120, PREZONE444, MX82, MX44 et PMX34

Code : H10509



1 front panel XLR microphone input  
 1 front panel RCA line input  
 1 back panel RJ45 connection  
 Front panel volume control  
 ON/OFF Switch  
 Source display shown by LED  
 DC15V power by RJ45 cable from the ZONEAMP4120 or the PREZONE444  
 Dimensions: 80 x 80 x 50 mm  
 Weight: 0.2kg

1 front panel XLR microphone input  
 1 rear RJ45 output  
 Talk switch on front panel to enable microphone  
 Chime switch to launch chime  
 Zone selection switch  
 Volume setting (Microphone and Chime)  
 Lock/unlock switch to block zone selection  
 LED level display  
 Power by RJ45 cable from the ZONEAMP4120 or the PREZONE444  
 Frequency response: 45 Hz - 15 kHz  
 T.H.D (1 kHz nominal power): < 0.1%  
 Dimensions: 140 x 60 x 205 mm  
 Weight: 0.9kg

# MIXERS

MX44



PMX34



**NEW**



**MX44**  
Mixer 4 inputs / 4 outputs

---

Code : H11018

---



**NEW**



**PMX34**  
Mixer 2IN + 1 USB/SD/TUNER/BT  
Multimedia Player - 4OUT 1U matrixable

---


Code : H11017

---



2 balanced inputs Microphone/line mono or stereo on Euroblocks connectors  
2 mono or stereo line inputs on Euroblock connectors  
4 balanced mono or stereo outputs on Euroblocks connectors  
Priority microphone  
Phantom power supply on inputs 1 and 2  
Gain and tone adjustment (3 bands) on channels 1 and 2  
Gain adjustment on all inputs  
RJ45 connector for microphone control panel  
Mute contact possible on outputs 1 to 4  
Assignment of zones 1 to 4 on each input channel  
Signal and Peak display on each input channel  
Output level display by zone via 3 LEDs  
Vu meter  
Power supply 110-240v AC or 24v DC

2 balanced Mic/Line inputs on Euroblocks connectors  
USB/SDz/BT/BT/Tuner media player/recorder  
4 balanced mono or stereo outputs on Euroblocks connectors  
Priority microphone  
Phantom power supply on inputs 1 and 2  
Gain and tone adjustment (3 bands) on channels 1 and 2  
Gain adjustment on all inputs  
RJ45 connector for microphone control panel  
Mute contact possible on outputs 1 to 4  
Assignment of zones 1 to 4 on each input channel  
Signal and Peak display on each input channel  
Output level display by zone via 3 LEDs  
Vu meter  
Power supply 110-240v AC or 24v DC

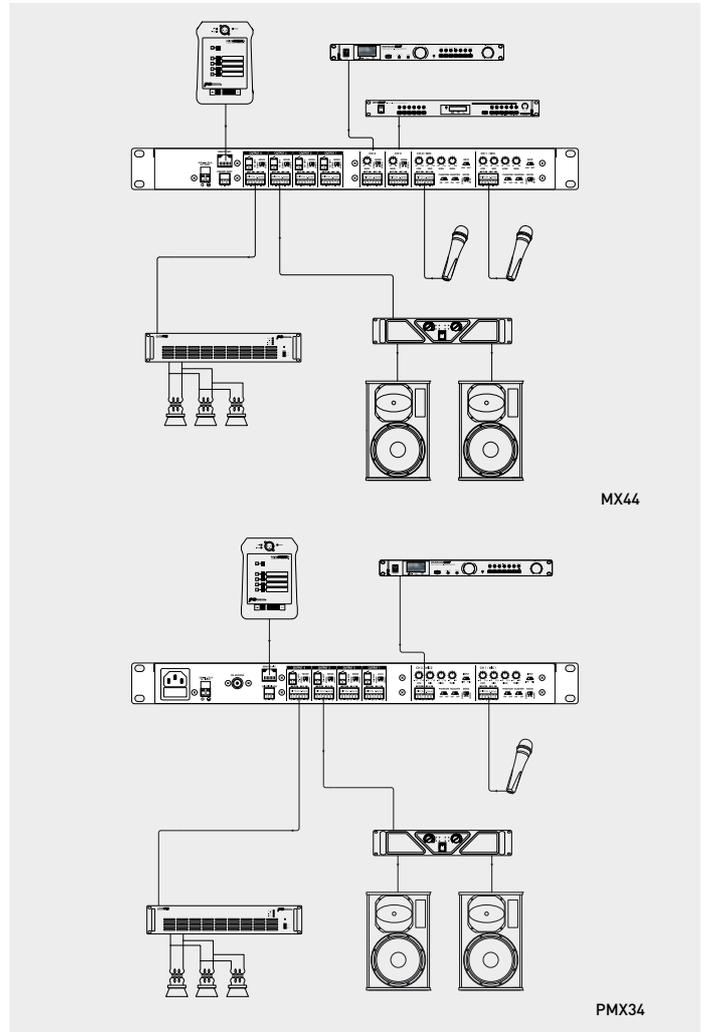

MX44

PMX34

# MIXERS

## COMPATIBLE WITH MIC-DESK4

Resolutely focused on professional installations, the MIX82 mixer/preamp offers 2 mono mic/line inputs and 6 stereo inputs. Each input can be independently routed to one of two zones, or both zones simultaneously, to offer a maximum range of options.





**MX82**  
1U 8IN 2OUT stereo mixer with priority  
+ Remote Mic

---

Code : H10926

---




Rated output Level/impedance : 0 dB / 600 Ohms balanced  
 Input sensitivity / Impedance:  
 Mic input (CH1-2) - 60 dB - -16dB / 20 Ohms balanced  
 Line input (CH1-6) - 60 dB - +4dB / 20 Ohms balanced  
 Frequency Response [-1 dB]: 20 Hz - 20 000 Hz  
 T.H.D: < 0,1%  
 Crosstalk: → 70 dB  
 Equalization :  
 Mic input : High: 12 kHz ± 15 dB / Mid : 2,5 kHz ± 15 dB / Low : 80 Hz ± 15 dB  
 Output:  
 High: 10 kHz ± 15 dB / Low : 100 Hz ± 15 dB  
 Hum & Noise: →90 dB  
 Weight: 9 kg  
 Dimensions: 482 x 44 x 320 mm  
 Power supply 110-240v AC ac or 24v DC




### 8 INPUTS

Each input can be routed to your chosen zone or zones. Installer settings are accessible with a screwdriver.



### 2 OUTPUTS

The MX82 has 2 outputs equipped with a 2-band equalizer and independent level adjustment.

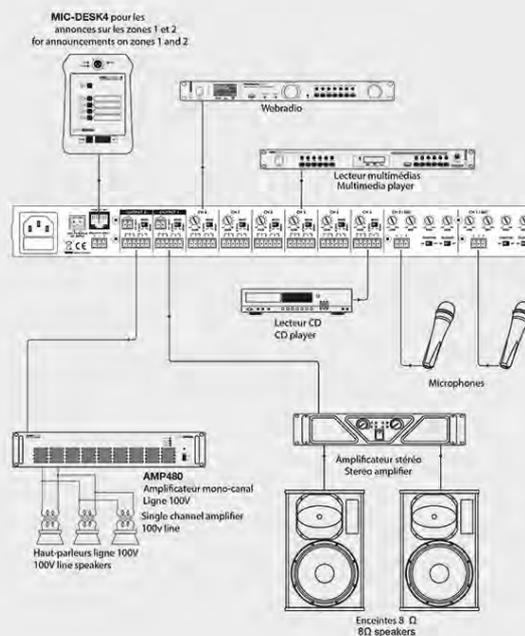

# MIXERS



## COMPATIBLE WP1 AND MIC-DESK4

The WP1 enables remote input from another room and to control the volume in that zone.  
The MIC-DESK4 enables announcements to be made in selected zones.




## PREZONE444

8 channels and 4 independent output zones mixer

Code : H10507



- 4 Mic/Line inputs on XLR/6.35 Jack (TRS)
- 4 stereo inputs on RCA or 6.35 Mono Jack
- 4 line outputs per zone on Phoenix plug
- Microphone priority on input 1
- Phantom power on inputs 1 to 4
- Gain and tone (3 bands) on input 1 to 4
- Gain control on all inputs
- Tone control (2 bands) per zone
- 5 RJ45 connectors to connect 1x WP-1 per zone and to connect 1x MIC-DESK4
- General Mute key
- Zone allocation 1 to 4 on each input
- Signal / Peak display on each input
- 5 LED VU meters per zone
- AFL / PFL front panel HP monitoring
- Power supply: 230 V 50/60 Hz DC 24V
- Dimensions: 320 x 088 x 482 mm
- 19-inch rackable, Height: 2 units Weight: 5 kg

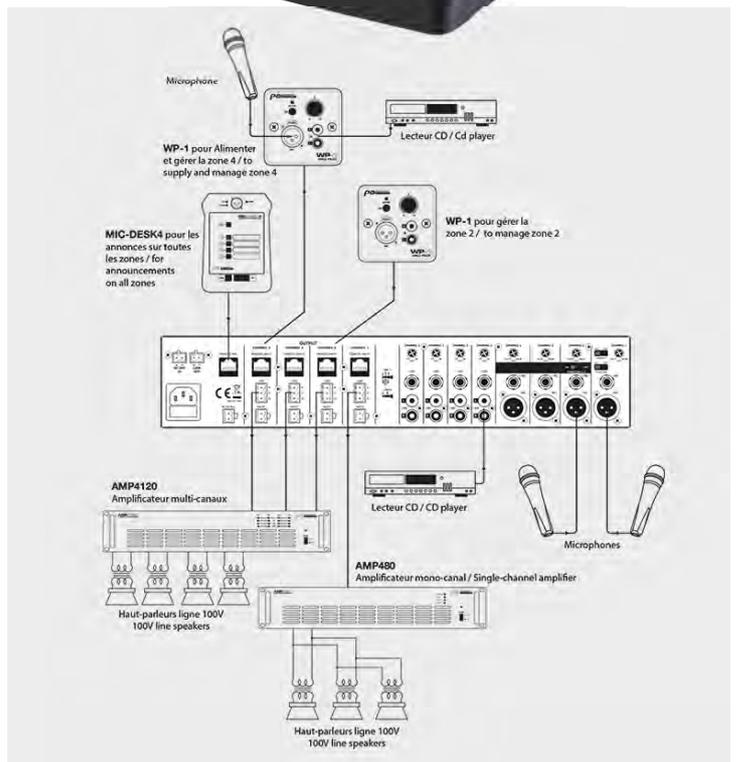

# MIXERS

## THE IDEAL COMPACT MIXER/ZONER TO USE WITH MULTIPLE SOURCES

Resolutely focused on professional installations, the PREZONE642 mixer-preamp offers 6 mono mic/line inputs via XLR or jack and 4 stereo inputs via RCA or jack.

### MICROPHONE AND LINE INPUT

#### EACH MICROPHONE INPUT HAS:

- Gain setting
- 3-band equalizer
- These settings are reserved for installation and can only be modified by means of a screwdriver

#### EACH LINE INPUT HAS:

- Gain setting. (This setting is reserved for installation and can only be modified by means of a screwdriver)

### AN ADVANCED MASTER SECTION

#### EACH ZONE HAS:

- Its own volume
- Its own equalisation
- Its own SUB output level setting
- Its own output level display

#### THE HEADPHONE SECTION IS ADVANCED WITH:

- Listening selection per channel via a PFL switch per increment
- The possibility to listen to each output independently via a zone selector.



### PREZONE642

Mixer 10 inputs/Preamp 2 zones 6 microphone inputs - 4 line inputs - 2 zones

Code : H9902



★★★★★



★★★★★

6 Mic/Line inputs on XLR/6.35 Jack CH1 and 2 phantom power and priority microphone


4 stereo inputs on RCA or Jack  
Zones 1 and 2 balanced outputs on XLR  
Balanced SUB output per zone on Jack  
Stereo REC Output output on RCA  
Gain and tone (3 bands) on inputs 1 to 6  
Gain setting on stereo inputs  
Tone control (2 bands) per zone  
SUB volume per zone setting  
Zone allocation and PFL per input  
LED signal and Peak display  
8 LED VU meters per zone  
Headphone output with volume (zones and PFL)

Power supply: 230 V 50/60 Hz DC24V

Dimensions: 295 x 085 x 482 mm

19-inch rackable, Height: 2 units

Weight: 5 kg

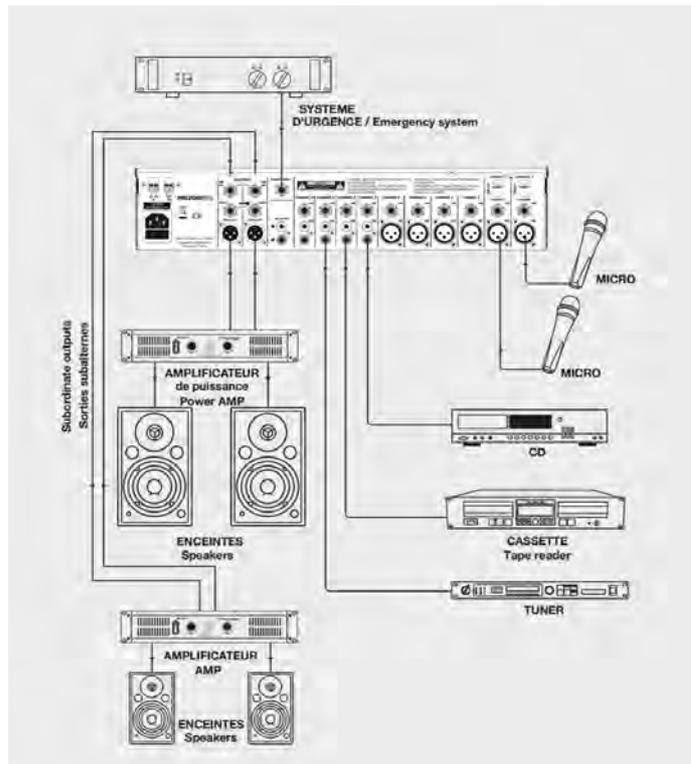

# ANALOG MATRIX



## PREZONE88

Analog matrix 8 inputs 8 outputs 8 outputs

Code : H10927



- 8 inputs and 8 outputs can be matrixed
- 4 MIC-DESK microphone console ports
- One telepaging microphone input with phantom power
- Possibility to remote one wall controller per zone (WS8 or WP8)
- DRP (Digital Recording and Playback) up to 60 seconds
- Output extension for the use of several PREZONE88 up to 4 units, i.e. 32 zones
- Priority: PAGING → DRP → MRM → MWP8A → BGM
- 8 BGM input indicators (-20dB)
- Easy installation with CAT-5 cable
- 2-band EQ per output (100Hz/10kHz)
- Balanced outputs on Phoenix terminal block
- Power supply 110-240v AC or 24v DC



## MIC-DESK16M

16-zone micro console for PREZONE88

Code : H10978



## MIC-DESK8M

8-zone micro console for PREZONE88

Code : H10977



## WP8

Wall-mounted controller for PREZONE88  
Source, volume, MIC input and line input selector switch

Code : H10928




## WS8

Wall-mounted controller for PREZONE88  
Source selector, volume

Code : H10979



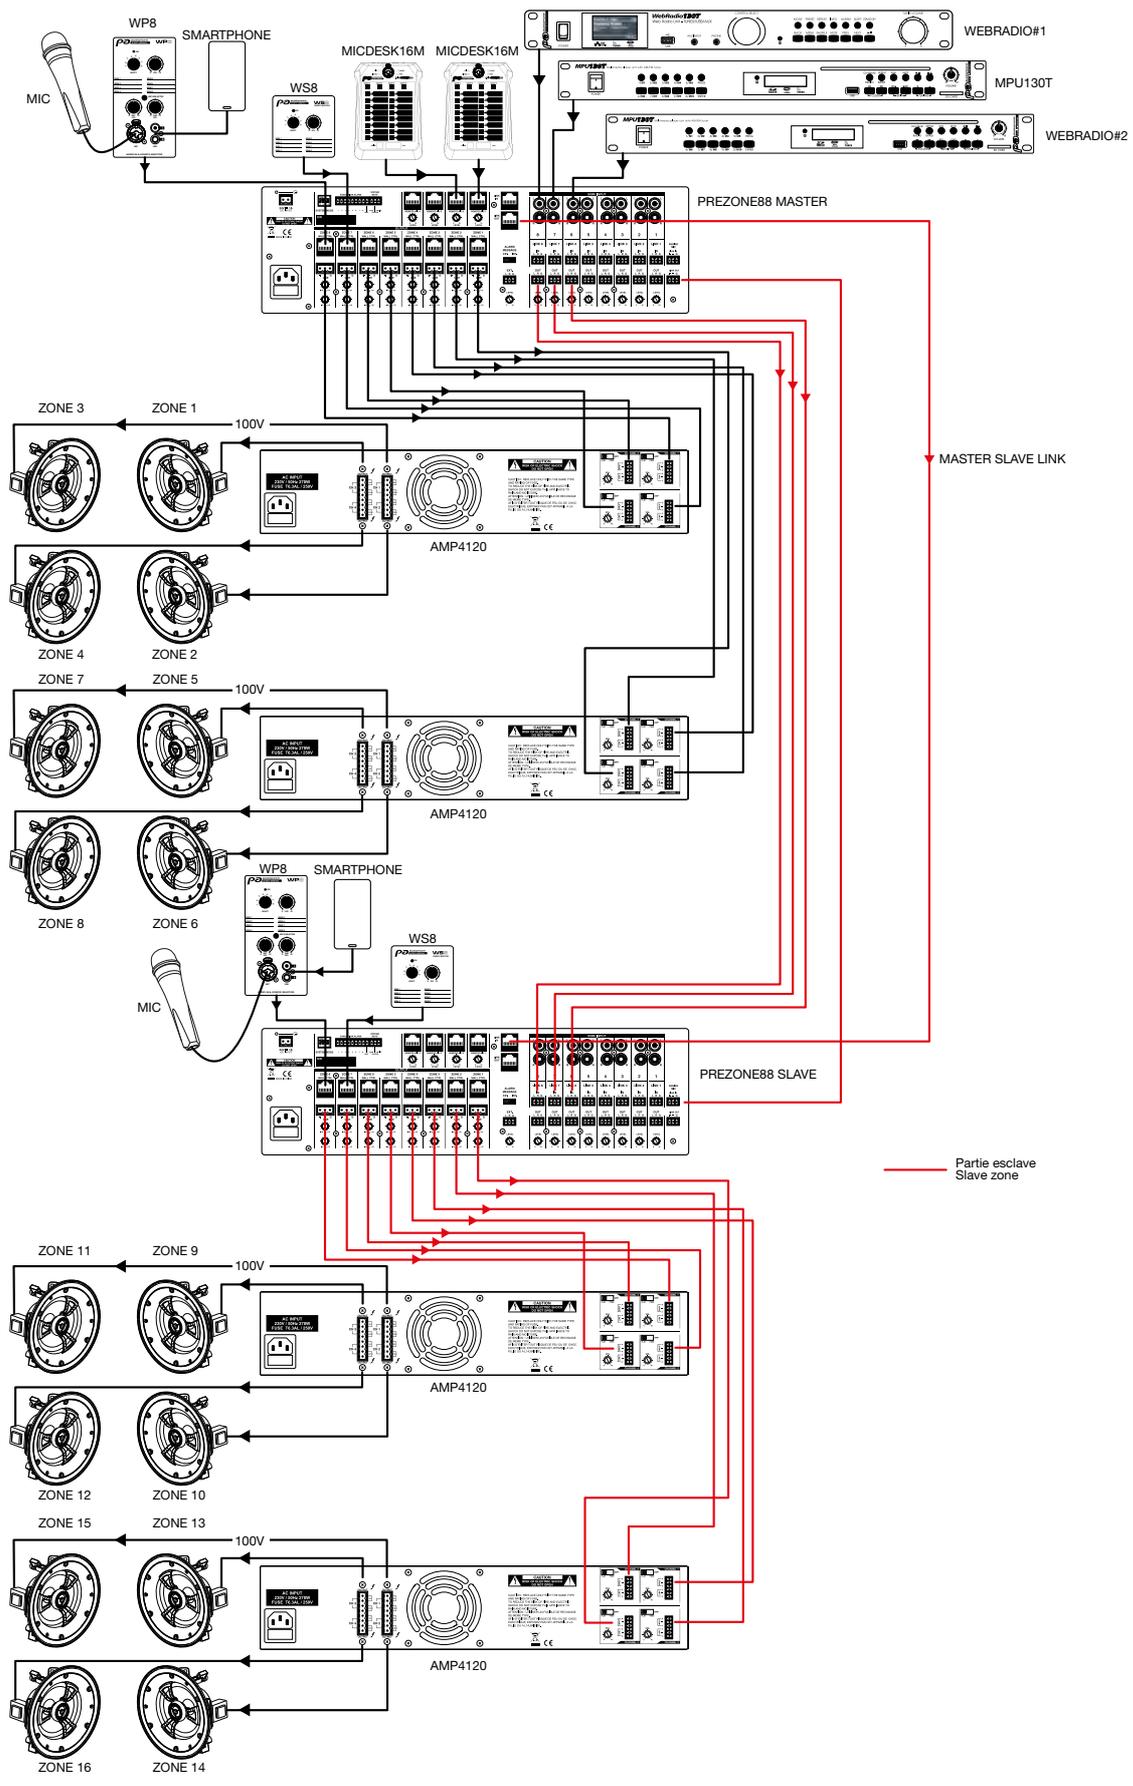

# DIGITAL MATRIX

DZONE88 is an 8 audio digital input and 8 audio digital output matrix. It's entirely configurable and offers a large range of solutions for easy or more complicated installations thanks to its multi zone router. The matrix can be hub USB or ethernet configured and driven through the management software that is supplied.

Its 8 balanced inputs accept a MICRO or LINE level and can be freely directed through the 8 outputs. Its powerful DSP processor enables you to act on all input signal processing with : Alim Phantom, Anti-larsen, Noise Gate, Compressor, parametric EQ, AutoMix and on output with Parametric EQ, Delay, Compressor and limiters.

You also have 8 GPIO ports that can be set and used towards a specific functionality.



**NEW**

**DZONE88**  
Digital matrix 8in 8out with software

Code : H11041

**NEW**

**DCTL**  
Wall-mounted control box for DZONE88

Code : H11042

Sampling: 48 KHz / 24 bits  
 Processor: 32-bit fixed/floating-point  
 DSP 300MHz  
 8 balanced MICRO / LINE inputs (Phoenix connectors, 3.81 mm, 12 pin)  
 8 LINE level balanced outputs (Phoenix connectors, 3.81 mm, 12 pin)  
 8 GPIO Ports, N°1-7 IN/OUT, N°8 OUT  
 Control ports 1 x RS 485 1 x RS 232  
 Parameter setting and control on PC via Ethernet (RJ45) or USB-B on the front panel  
 DSP functions  
 Input / Output Mixer  
 For each input : 48V phantom power supply, Generators, Gain controls, AFC, Noise Gate, 21  
 PEQ-X, Compressor.  
 For each output : 10 PEQ-X, Delay, Compressor, Limiter.  
 AutoMix and Matrix MIX function  
 - Dimensions: 483 x 44.5 x 210 mm  
 - Net weight : 2.8Kg

Main volume control  
 Volume control for each input and output.  
 Direct access to user presets  
 Touch screen  
 Color: 64K 16-bit RGB  
 Communication interface: RS485  
 Screen resolution: 320 x 240 pixels  
 Screen size: 5.6 inches (72.5 x 70.5 mm)  
 Product dimensions: 90.5 x 90.5 x 29 mm  
 Voltage: 5-26V




DCTL is the remote control wall box for the DZONE88 matrix, by means of its touch screen, it enables you to act on all 8 inputs and outputs as well as on the matrix overall volume, it also allows you to select a preset user, memory stored when it was configured.



Flush-mounted box compatible with WALLAMPtouch and WALLAMPmedia


H10637 - PILOTBOX - Square back box 47 mm white  
 H10638 - PILOTSCREW - Steel screw size M3.5x20 - 1 piece

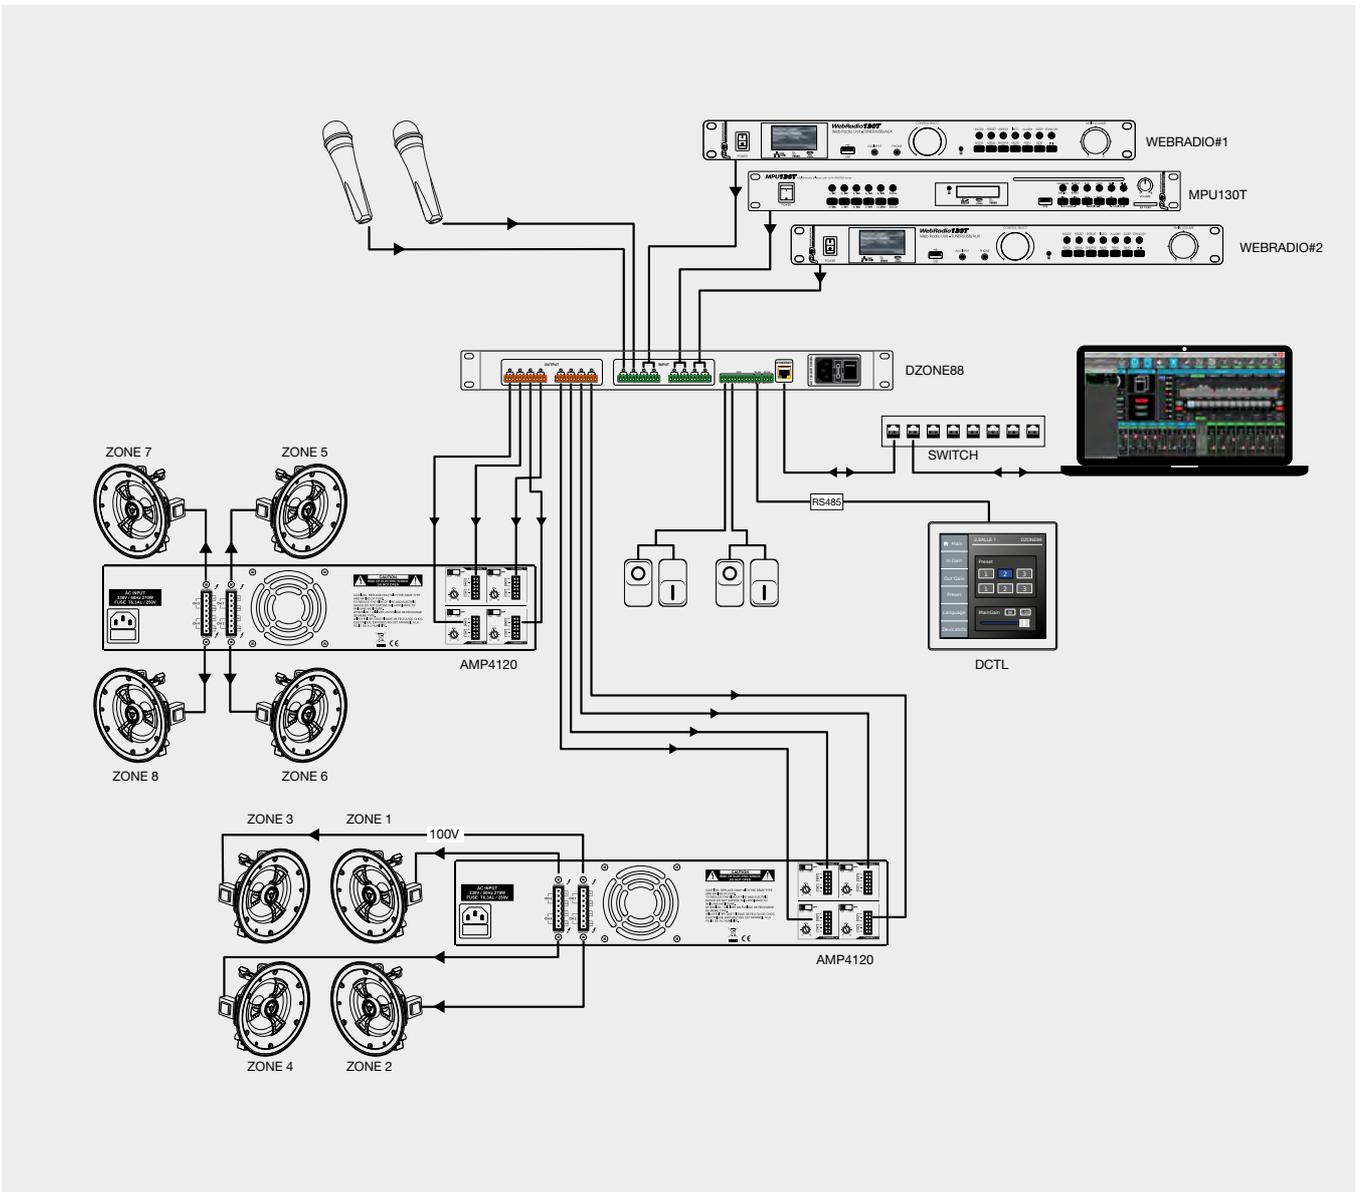


In and Out functions



31 points PEQ screen

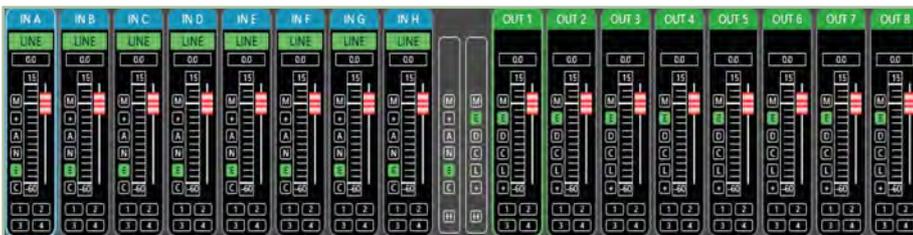

In and Out channel

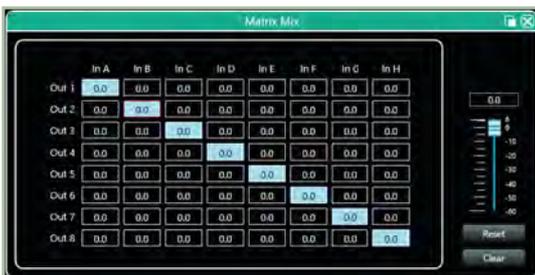

Matrix screen

# WEBRADIO



## MPU130BT

MP3 CD player + USB /SD + Tuner + BT

Code : H10961




AVM protected USB/Mp3 player  
 USB reader with a USB mass storage output (at the front, max 16Go, FAT32 formatted)  
 Bluetooth 2.1  
 SD and SDHC reader with a front slot (16 Go max)  
 Output volume control  
 AM/FM Tuner with autoscans and a 10 stations memory capacity  
 A button allows you to browse the repertoires and tracks  
 Infrared remote control supplied  
 Random or programmable playlist  
 Unbalanced [-10 dB] RCA output  
 Mountable in 19" wide racks and ON/OFF power switch at the front  
 Dimensions : 482 x 44 x 275 mm (1x19" unit)  
 Power supply : 230 V, AC - 50 Hz or 12 V, DC  
 Weight : 3.4 kg



## SOURCE CONTROL

The MPU130T is a true multimedia centre capable of supplying a continuous sound atmosphere no matter what the source is. It's very easy to use thanks to its single output, it can be controlled independently by remote control, or directly from the front panel. Its USB and SD ports give access to hundreds of hours of non-stop music that can be pre-programmed or read randomly.

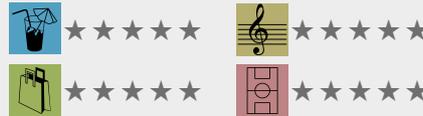

## WEBRADIO130App

WEBRadio LAN LAN WIFI+FM DAB+USB Reader + App



Code : H10963



Radio: Ethernet / Wifi Internet radio, DAB and DAB+ digital radio, FM with RDS  
 Mp3 reader: USB port for reading mp3/AAC/WMA/FLAC files on USB flash drive or FAT32 external disk drive  
 Shared files: Audio file sharing available on your computer network to pool your favourite playlists  
 Programmable power on:  
 Infrared remote control  
 Aux input on 3.5mm Jack  
 Line level outputs on RCA and Headphone on 3.5mm Jack  
 Power supply: 230V - 50/60Hz or DC12V  
 Dimensions: 483 x 44 x 265 mm  
 Net weight: 2.9 kg



- Internet or DAB radio for an international selection of digital music
- USB port to play MP3 files on your hard drive
- Share audio files on your computer network
- Webradio control by mobile application

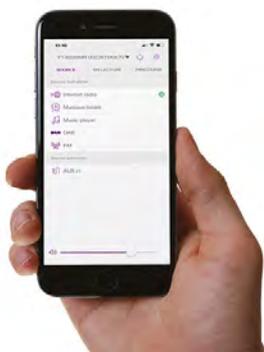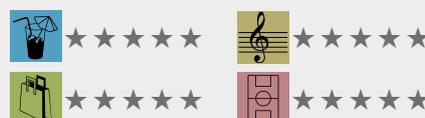

Webradio control by mobile application. Android and iOS compatible

# WEBRADIO130APP

Radio stations from all over the  
world come to your door



**pa** audiophony  
public address

# HEARING LOOP SYSTEM

More information :  
<https://audiophony-pa.com>

On demand, feasibility study and site plan.



## ABOUT THE HEARING LOOP SYSTEM

A hearing loop or induction loop is a hearing aid system for the hearing-impaired using a magnetic induction loop.

With this system, the sound from a speaker's microphone, PA equipment, TV set, etc. is transmitted wirelessly to the hearing aid of the person, who can hear it without being disturbed by any ambient noise. This system is mainly used in public places (conference rooms, cinemas, courts, churches, counters, etc.)

A large number of conventional hearing aids incorporate the "T" loop function. Hearing loops are mainly installed in rooms.

The installation consists of an electrical wire that travels around the perimeter of the room thus forming a loop. This loop is connected to an audio amplifier. The hearing aid has a coil, often called "T" or "T-coil".

This coil, placed inside the hearing aid, is also made of a wire that makes a large number of turns.

## MAGNETIC FIELD

The magnetic field generated by the large loop around the room will cross the small loops in the hearing aid and, by the principle of induction, the electrical signal present in the large loop will end up in the small ones.

This is how the signal from the audio amplifier is transmitted to the hearing aid, which will then return it to the ear of the hearing-impaired person.



## REGULATIONS

The 2005 - 102 Act of 11 February 2005 sets out the requirement for public establishments to be accessible to people with disabilities before 1 January 2018

This obviously applies to establishments open to the public, such as:

Administrative and cultural facilities,

Health buildings,

Sports facilities,

But also supermarkets, cinemas, public transport, etc.

Facilities must comply with the standard: EN 60118-4:

Background noise (electromagnetic pollution) must be < 32 dB at 400 mA/m

The magnetic field must be between +/- 3 dB for a signal from 1 kHz to 400 mA/m

The frequency response must be 100 Hz - 5 kHz at +/- 3dB



### BM-PORTABLE

Portable and autonomous loop amplifier

Code : H10799



This portable loop system makes it easy to equip a desk or counter. Made of ABS, it has an integrated microphone, amplifier, rechargeable battery and an induction loop for a coverage of: 1.2 m<sup>2</sup>. Charger included.



### BM-KIT

Loop amplifier kit for counter use

Code : H10795



Induction loop kit for equipping: counters, reception desks or service desks. This kit includes: 1 x induction loop amplifier 1 x surface microphone 1 x loop 1 x power supply 3 x "Space adapted for the hearing-impaired" stickers. 2 inputs: 1 microphone/line and 1 line Phantom power Compressor and noise limiter Output protection and control Power: 230 V 50/60 Hz - 12 V DC 1.5 A Size: 92 x 52 x 18 mm Weight: 0.850 kg



### BM-A250

Loop amplifier for 250 m<sup>2</sup> area

Code : H10796



Class D amplifier for approximately 250 m<sup>2</sup>  
3 inputs: 2 line or microphone inputs (connector: 1 Phoenix and Combo), 1 priority 100 V input  
Monitoring and detection of power supply, amplifier and loop faults with NO-NC relay.  
Automatic gain control  
Correction control due to metal losses  
Power: 230 V 50/60 Hz  
Size: 483 x 43 x 215 mm  
Weight: 2.47 kg



### BM-A1000

Loop amplifier for 1000 m<sup>2</sup> area

Code : H10797



Class D amplifier for approximately 1000 m<sup>2</sup>  
3 inputs: 2 line or microphone inputs (connector: 1 Phoenix and Combo), 1 priority 100 V input  
Monitoring and detection of power supply, amplifier and loop faults with NO-NC relay.  
Integrated phase shift module (output 90° or 0°)  
Automatic gain control  
Correction control due to metal losses  
Power: 230 V 50/60 Hz  
Size: 483 x 43 x 215 mm  
Weight: 2.47 kg



### BM-TEST

Hearing aid simulator for loop amp test

Code : H10798



BM-TEST is a compact listening device for magnetic induction loop systems. It can be used in different situations:

- To determine if an induction loop is working properly
- For hearing-impaired people who do not wear a hearing aid
- For wearers of hearing aids that do not have a "T" function

The kit comprises:

- 1 x loop receiver
- 1 x headset
- 2 x AAA batteries

Frequency response: 20 Hz - 6 kHz  
Battery life: >100 hours



### BM-SCAN

Magnetic field meter

Code : H10878



The BM-SCAN field strength meter has been designed to ensure that magnetic loop systems are installed and certified according to the new IEC 60118-4 standard. When these standards are met, the comfort of the user will be identical wherever he/she uses a hearing aid with the T position.

3.5 mm headphone jack socket  
Power supply: 9 V battery (not included)



### BM-Cu50

Copper tape 50 m - 18 mm wide x 0.1 mm thick

Code : H10800



The BM-Cu50 is an 18-mm wide, 0.1-mm thick (1.8 mm<sup>2</sup> cross-section) copper tape insulated by a 0.05 mm Melinex band. Resistance +/- 10mΩ/m.  
Cables specially designed for induction loops where the loop must go under carpets or in places not suitable for conventional cables.

50 m coil



### BM-Cu100


Copper tape 100 m - 18 mm wide x 0.1 mm thick

Code : H10801




The BM-Cu100 is a 18 mm wide, 0.1-mm thick (1.8 mm<sup>2</sup> cross-section) copper tape insulated by a 0.05 mm Melinex band. Resistance +/- 10mΩ/m.  
Cables specially designed for induction loops where the loop must go under carpets or in places not suitable for conventional cables.

100 m coil

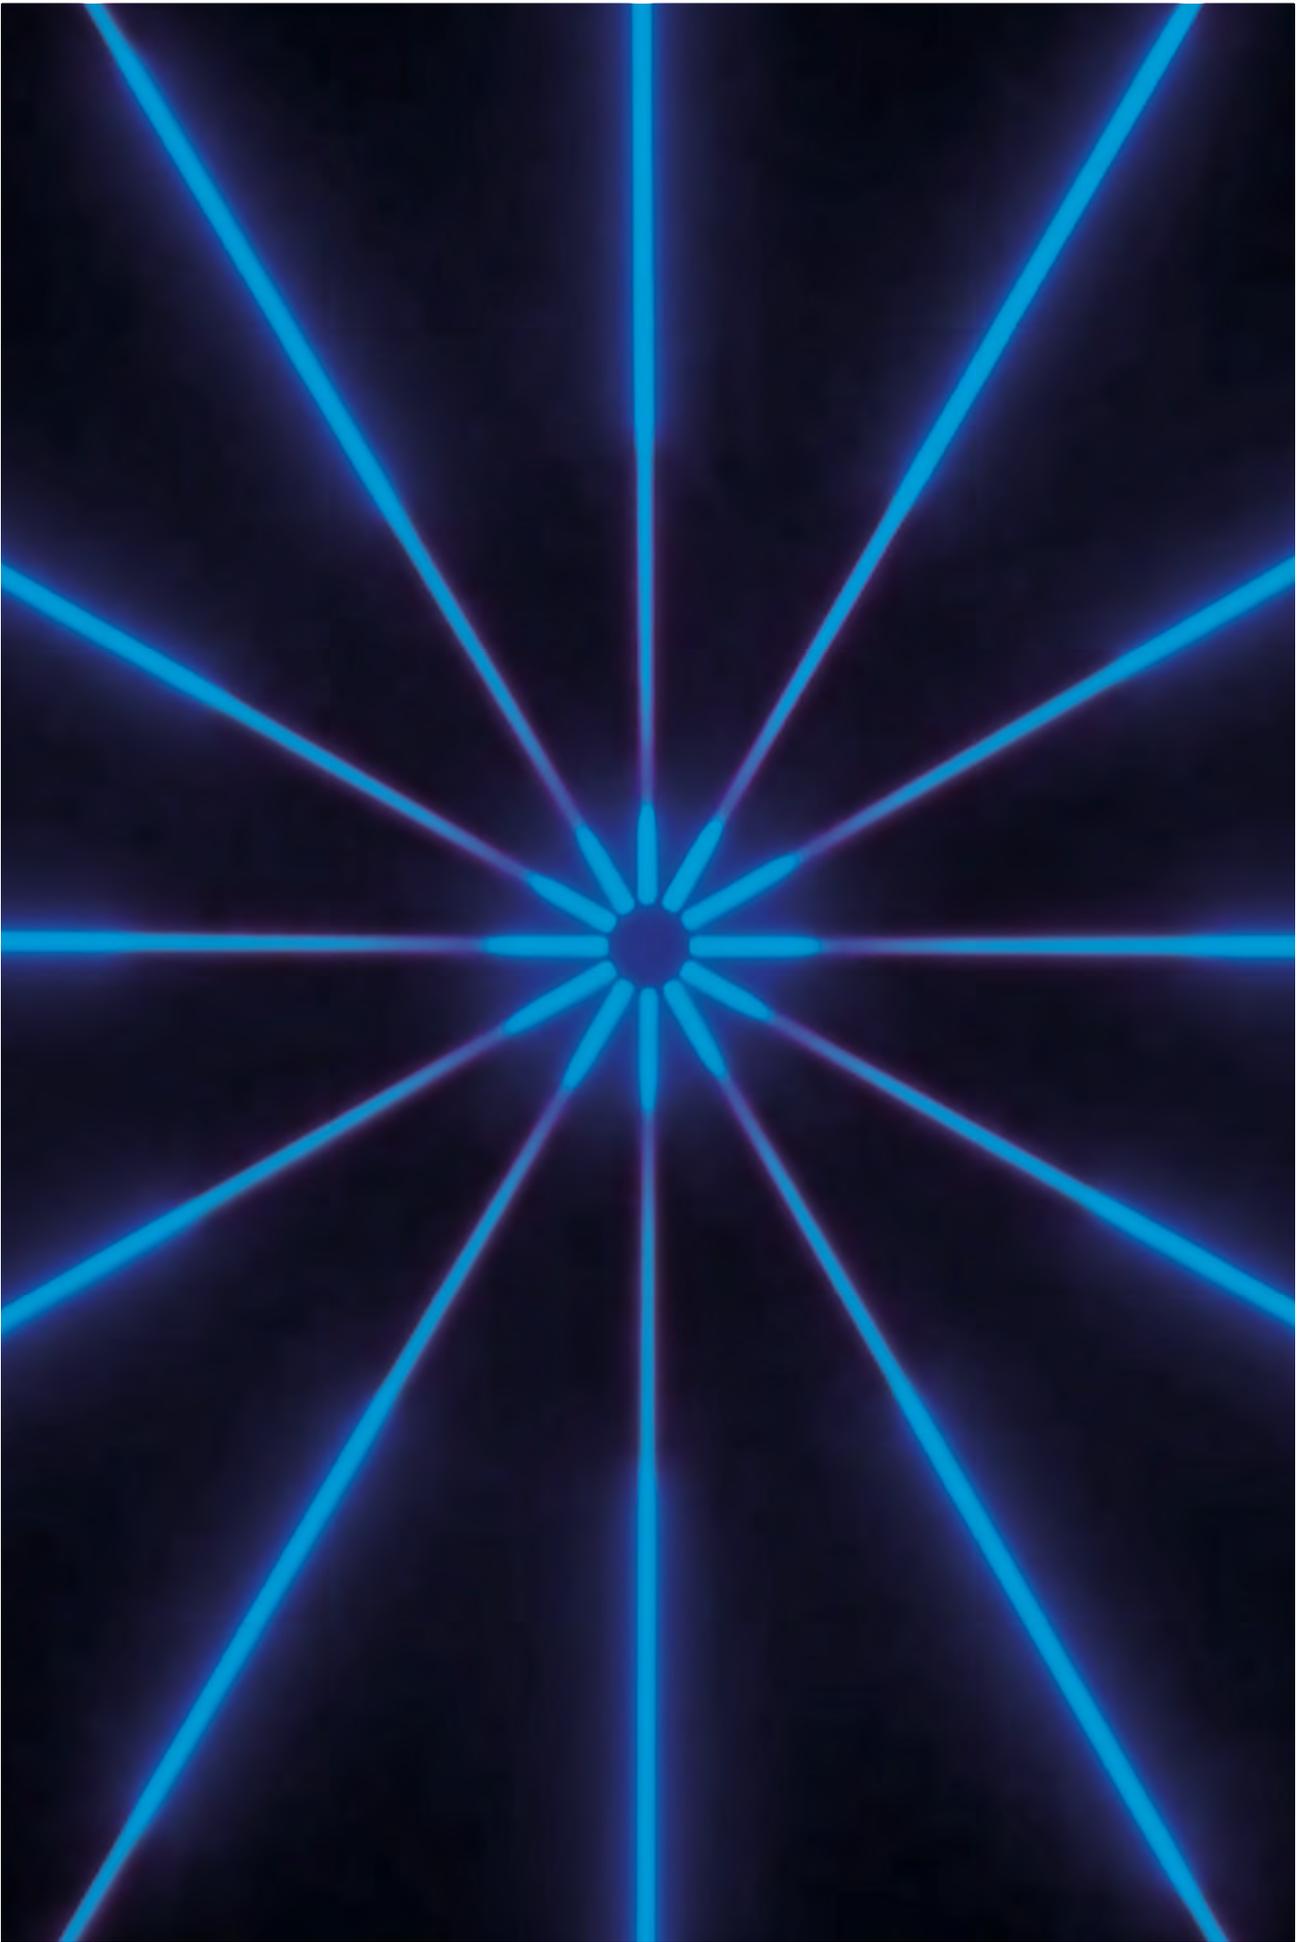

# LIGHT INTEGRATION

LED RIBBONS  
SMART PIXEL  
CONTROLLERS  
DRIVERS  
BOOSTERS AND MANAGERS  
POWER SUPPLIES  
PROFILES AND DIFFUSERS  
ACCESSORIES

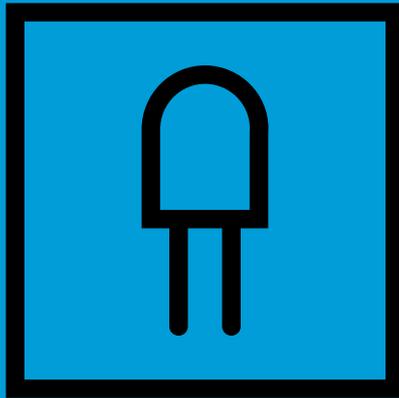

# ADVANTAGES of the LEDs?

- Long life, low maintenance
- Low energy cost
- Resistant to shocks and vibrations
- Very compact format
- No infrared and UV emissions

Ra  
80

## RA OR CRI

An Ra equal to 100 corresponds to natural daylight. At this level, the colours are perceived without any change (or loss) for the human eye.

LEDs which diffuse artificial light cannot claim an CRI greater than 90. In places that require that colours are complied with (e.g. points of sale or exhibitions), it is essential to provide equipment with an index greater than 70).

## COLOUR TEMPERATURE

The unit of colour temperature is Kelvin degree (K°).


The lower the degree of temperature, the warmer the light. The higher the degree of temperature, the colder the light.



## WHAT TYPE OF LED?



—  
5054: 4 chips (RGBW)  
of 0.32w/led  
Good brightness



—  
5630: 1 chip of 0.33w/led  
Very high brightness  
Only monochrome



—  
5050: 3 chips (RGB) of  
0.24w/led  
Good brightness



—  
5050: 1 hot white or cold  
white chip of 0.24w/led  
High brightness

## Ideal for ambient lighting



—  
3527: 2 chips (warm white  
cold white) of 0.16w/led



—  
WS2812B:  
3 RGB chips of 0.24w/led with integrated control circuit  
Each LED can be controlled independently

# LED RIBBONS

Intense colours, bright white or softened light, our ribbons ensure an exceptional rendering in ambient lighting as well as enhancing your spaces.

IP67	60 LEDs/m	LED SMD 5050	Ra 80
			
<b>PURETAPE6067-WARM</b> 3000°K White LED ribbon Roll of 5 meters - IP67 - 60 LEDs/meter			
Code : H9861			
			

Monochrome adhesive ribbon of 300 warm white LEDs for 5m  
 Width: 12,5 mm  
 Colour temperature: 3000°K  
 Luminosity: 1080 lumens/m  
 Power required: 14.4W/m (72W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 10 cm (6LEDs)  
 IP67: Full silicone sheath

IP20	144 LEDs/m	LED SMD 5630	Ra 80
			
<b>PURETAPE14420-WARM</b> 3000°K White LED ribbon Roll of 5 meters - IP20 - 144 LEDs/meter			
Code : H10536			
			

Double monochrome adhesive ribbon of 720 warm white LEDs for 5m  
 Width: 20 mm  
 Colour temperature: 3000°K  
 Luminosity: 2452 lumens/m  
 Power required: 47.5W/m (238W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 8.4 cm (12 LEDs)  
 IP20: no protection no sealing

IP20	60 LEDs/m	LED SMD 5050	Ra 80
			
<b>PURETAPE6020-WARM</b> 3000°K White LED ribbon Roll of 5 meters - IP20 - 60 LEDs/meter			
Code : H10535			
			

Monochrome adhesive ribbon of 300 warm white LEDs for 5m  
 Width: 10 mm  
 Colour temperature: 3000°K  
 Luminosity: 915 lumens/m  
 Power required: 14.4W/m (72W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 10 cm (6LEDs)  
 IP20: no protection no sealing

IP67	60 LEDs/m	LED SMD 5050	Ra 85
			
<b>PURETAPE6067-COLD</b> 6000°K White LED ribbon Roll of 5 meters - IP67 - 60 LEDs/meter			
Code : H9862			
			

Monochrome adhesive ribbon of 300 Colour temperature: 6000°K  
 Width: 12,5 mm  
 Luminosity: 1170 lumens/m  
 Power required: 14.4W/m (72W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 10 cm (6LEDs)  
 IP67: Full silicone sheath

IP20	60 LEDs/m	LED SMD 5050	Ra 85
			
<b>PURETAPE6020-COLD</b> 6000°K White LED ribbon Roll of 5 meters - IP20 - 60 LEDs/meter			
Code : H10537			
			

Monochrome adhesive ribbon of 300 cold white LEDs for 5m  
 Width: 10 mm  
 Colour temperature: 6000°K  
 Luminosity: 1190 lumens/m  
 Power required: 14.4W/m (72W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 10 cm (6LEDs)  
 IP20: no protection no sealing

IP20	144 LEDs/m	LED SMD 5630	Ra 85
			
<b>PURETAPE14420-COLD</b> 6000°K White LED ribbon Roll of 5 meters - IP20 - 144 LEDs/meter			
Code : H10538			
			

Double monochrome adhesive ribbon of 720 cold white LEDs for 5m  
 Width: 20 mm  
 Colour temperature: 6000°K  
 Luminosity: 3065 lumens/m  
 Power required: 47.5W/m (238W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 8.4 cm (12 LEDs)  
 IP20: no protection no sealing

IP20	120 LEDs/m	LED SMD 3527	Ra 80-85
			
<b>PURETAPE12020-WARMCOLD</b> 3000+6000°K White LED ribbon Roll of 5 meters - IP20 - 120 LEDs/meter			
Code : H10539			
			

Two-tone adhesive ribbon of 600 warm and cold white LEDs for 5m  
 Width: 10 mm  
 Colour temperature: 3500K/6500K  
 Luminosity: 1264 lumens/m  
 Power required: 19.2 W/m (96W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 5.3cm (6 LEDs)  
 IP20: no protection no sealing

IP67	120 LEDs/m	LED SMD 3527	Ra 80-85
			
<b>PURETAPE12067-WARMCOLD</b> 3000+6000°K White LED ribbon Roll of 5 meters - IP67 - 120 LEDs/meter			
Code : H10540			
			

Two-tone adhesive ribbon of 600 warm and cold white LEDs for 5m  
 Width: 12,5 mm  
 Colour temperature: 3500K/6500K  
 Luminosity: 1264 lumens/m  
 Power required: 19.2 W/m (96W for 5m)  
 Voltage required: 24V (+ and -)  
 Cuttable every 5.3cm (6 LEDs)  
 IP67: Full silicone sheath



# LED RIBBONS

IP67	60 LEDs/m	LED SMD 5050
------	-----------	--------------



**COLORTAPE6067**  
3-colour LED ribbon  
Roll of 5 meters - IP67 - 60 LEDs/meter

Code : H9860

**Contest**®

Trichromatic adhesive ribbon of 300 RGB LEDs for 5m  
Width: 12,5 mm  
Luminosity: 510 lumens/m  
Power required: 14,4W/m (72W for 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 10 cm (6 LEDs)  
IP67: Full silicone sheath

IP65	60 LEDs/m	LED SMD 5050
------	-----------	--------------



**COLORTAPE6065**  
3-colour LED ribbon  
Roll of 5 meters - IP65 - 60 LEDs/meter

Code : H9994

**Contest**®

Trichromatic adhesive ribbon of 300 RGB LEDs for 5m  
Width: 11 mm  
Luminosity: 510 lumens/m  
Power required: 14,4W/m (72W for 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 10 cm (6 LEDs)  
IP65: Upper molded silicone dome

IP65	30 LEDs/m	LED SMD 5050
------	-----------	--------------



**COLORTAPE3065**  
3-colour LED ribbon  
Roll of 5 meters - IP65 - 30 LEDs/meter

Code : H9859

**Contest**®

Trichromatic adhesive ribbon of 150 RGB LEDs for 5m  
Width: 10 mm  
Luminosity: 255 lumens/m  
Power required: 7,2W/m (36W pour 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 16,8 cm (6 LEDs)  
IP65: Upper molded silicone dome

IP20	60 LEDs/m	LED SMD 5050
------	-----------	--------------



**COLORTAPE6020**  
3-colour LED ribbon  
Roll of 5 meters - IP20 - 60 LEDs/meter

Code : H10541

**Contest**®

Trichromatic adhesive ribbon of 300 RGB LEDs for 5m  
Width: 10 mm  
Luminosity: 560 lumens/m  
Power required: 14,4W/m (72W for 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 10 cm (6 LEDs)  
IP20: no protection no sealing

IP20	60 LEDs/m	LED SMD 5054	Ra 80-85
------	-----------	--------------	----------



**COLORTAPE6020-WARM**  
LED ribbon 4-colour  
Roll of 5 meters - IP20 - 60 LEDs/meter

Code : H10542

**Contest**®

Ribbon of 300 4-colour RGBW LEDs for 5m  
Width: 12 mm  
Luminosity: 879 lumens/m  
Power required: 19,2W/m (96W for 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 10 cm (6 LEDs)  
IP20: no protection no sealing

IP67	60 LEDs/m	LED SMD 5054	Ra 80-85
------	-----------	--------------	----------



**COLORTAPE6067-WARM**  
4-colour LED ribbon  
Roll of 5 meters - IP67 - 60 LEDs/meter

Code : H10543

**Contest**®

Ribbon of 300 4-colour RGBW LEDs for 5m  
Width: 14 mm  
Luminosity: 646 lumens/m  
Power required: 19,2W/m (96W for 5m)  
Voltage required: 24V (+ and -)  
Cuttable every 10 cm (6 LEDs)  
IP67: Full silicone sheath

# LED RIBBONS




## FLEX LED PIXEL

The ribbons of the SMARTTAPE range are equipped with the latest WS2812B LED technology. In SMD5050 (5x5mm) format, the integrated control circuit is directly embedded in the component. More discreet, these LEDs make it possible to have ribbons of only 10mm width with a pitch of only 16mm for the SMARTTAPE6020 model.

The installation is very simple, as only 3 cables are needed for operation ("+", "-", Data in).

Associated with a power supply and a SMARTCTL controller, you will get 300 kinds of patterns with the ability to control the speed and brightness.

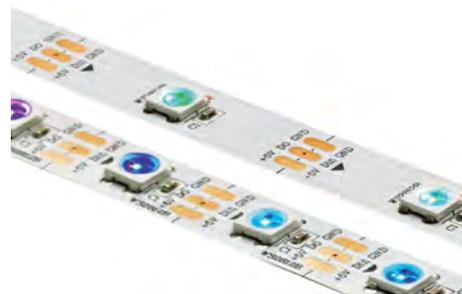


IP20	30 LEDs/m	LED WS2812B	PIXEL
------	-----------	-------------	-------

**SMARTTAPE3020**  
3-colour pixel LED strip of 30 LEDs/meter  
- IP20 - 5V

Code : H10596



3-colour adhesive ribbon of 150 RGB LEDs for 5m pixel version  
Width: 10 mm  
Power required: 7.2W/m (36W pour 5m)  
Voltage required: 5V DC  
Cuttable every 3.3cm (1 LED)  
IP20: no protection no sealing



IP20	60 LEDs/m	LED WS2812B	PIXEL
------	-----------	-------------	-------

**SMARTTAPE6020**  
3-colour pixel LED strip of 60 LEDs/meter  
- IP20 - 5V

Code : H10597



3-colour adhesive ribbon of 300 RGB LEDs for 5m pixel version  
Width: 10 mm  
Power required: 14.4W/m (72W for 5m)  
Voltage required: 5V DC  
Cuttable every 1.6 cm (1 LED)  
IP20: no protection no sealing



IP65	60 LEDs/m	LED WS2812B	PIXEL
------	-----------	-------------	-------

**SMARTTAPE6065**  
5m - IP65 - 60 LEDs/m-5V

Code : H10972



Voltage: 5 V DC  
Power/m: 14,4 W  
Length of each ribbon: 5 m  
Width: 11 mm  
Sectile parts: 1,6 cm (1 LED)



IP67	60 LEDs/m	LED WS2812B	PIXEL
------	-----------	-------------	-------

**SMARTTAPE6067**  
TRI pixel ribbon - 5m - IP67 - 60 LEDs/m-5V

Code : H10973



Voltage: 5 V DC  
Power/m: 14,4 W  
Length of each ribbon: 5 m  
Width: 12,5 mm  
Sectile parts: 1,6 cm (1 LED)



**SMARTCTL**  
HF remote control for SMARTTAPE ribbons of 2048 pixel max. - DC 5V

Code : H10598



Power supply: 5V DC  
Max controlled number of pixels: 2048  
Remote control : 433.92 MHz  
Remote control range: 30m

**NEW**



**SmartCTL-BTM**  
BT 960 Pixel Matrix Controller 960 pixels - DC 5V

Code : H11038



"LED CHORD" iOS and Android application  
For LED WS2811 and 2812B  
Bluetooth® 4.0  
200 built-in animations  
Controls up to 960 matrix pixels  
Power supply DC 5V

**NEW**



**SmartCTL-BTL**  
Bluetooth Controller 4.0 2048 pixels iOS/Android APP - DC 5V


Code : H11037



"MAGIC LED" iOS and Android application  
For LED WS2811 and 2812B  
Bluetooth® 4.0  
Controls up to 2048 pixels online  
Power supply DC 5V



# SMART PIXEL

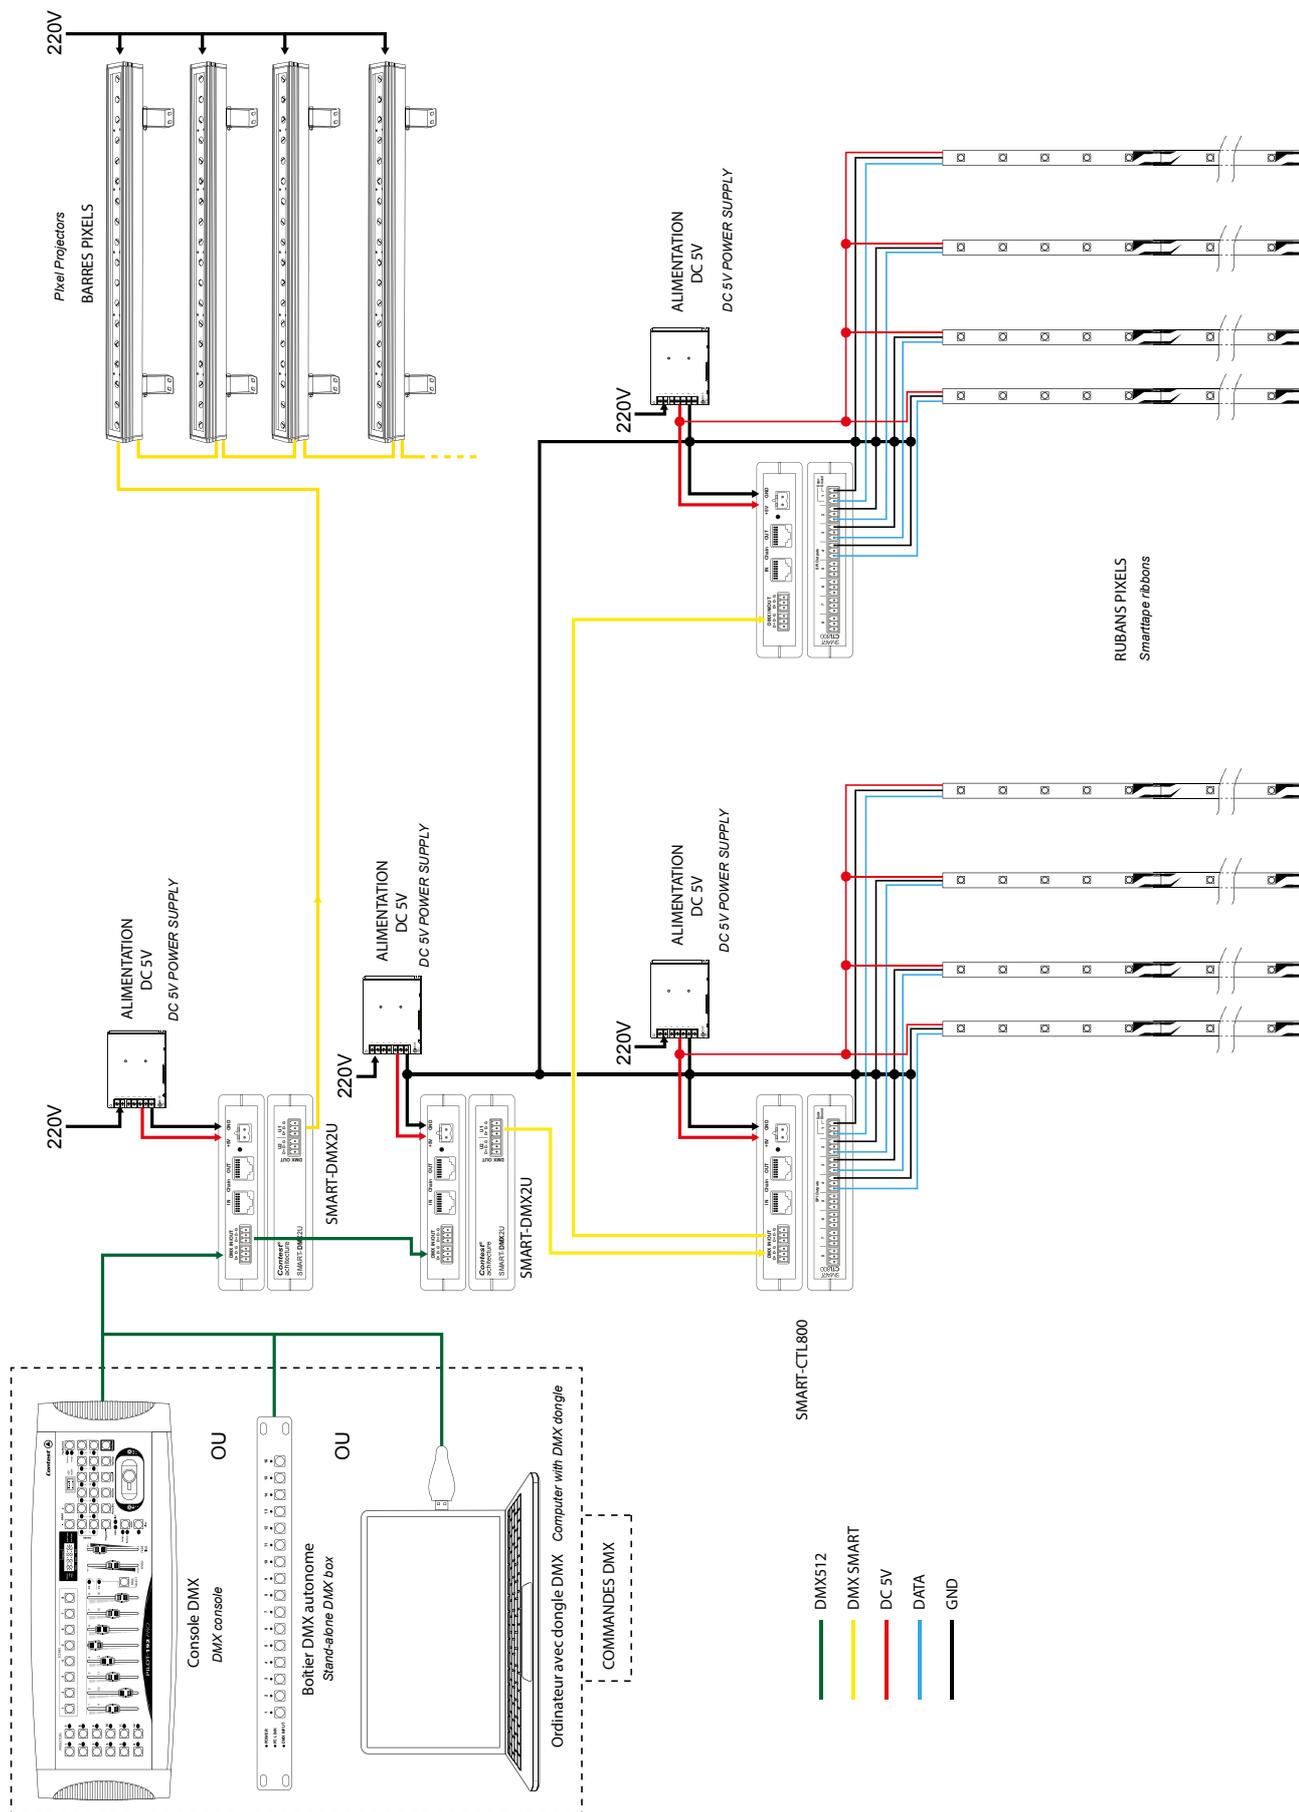

# PIXELS CONTROLLERS




## SMART-CTL800

800 LED pixel ribbon controller - 8 SPI outputs

Code : H10949



SMARTAPE controller (LEDs WS2811, 2812 etc.)  
 Inputs : DMX operation (16 channels) with dedicated software (simulator), stand alone mode  
 Outputs: 8 Euroblock SPI outputs, max. 800 pixels to be distributed over the 8 outputs.  
 Programming: RDM configuration and programming via Smart USB  
 Power supply: 5 V DC Euroblock connectors  
 DMX in/out: Euroblock connectors  
 Dimensions: 130 x 100 x 100 x 30 cm  
 Weight: 150 g

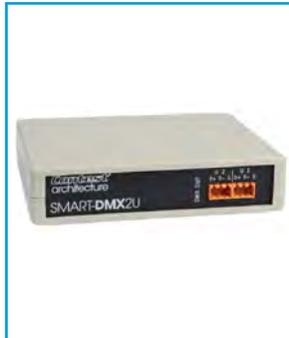

## SMART-DMX2U

DMX controller for SMART-CTL800 or DMX pixel bars

Code : H10968



Controls up to 128 SMART-CTL800s with 16 DMX channels  
 Inputs : DMX (16 channels), simulator with specific software, stand alone mode  
 Outputs: 2 DMX Euroblock outputs, 2x 512 DMX channels  
 Programming: RDM configuration and programming via Smart USB  
 Power supply: 5 V DC Euroblock connectors  
 DMX in/out: Euroblock connectors  
 Dimensions: 130 x 100 x 100 x 30 cm  
 Weight: 150 g





## SMART-USB

RDM interface for simul + pixel controller program

Code : H10948



USB/DMX interface for configuring the installation in RDM.

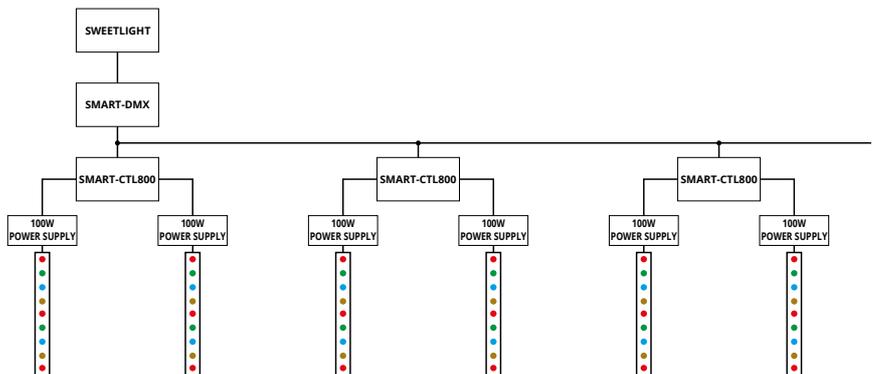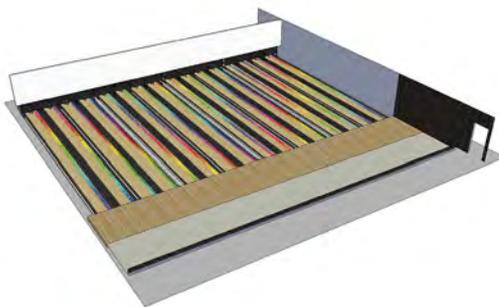

Flex LED Installation Simulator for Smarttape  
 Configuration of smart controllers with RDM  
 Standalone memory management  
 Program creator



# TOUCH CONTROLLERS

Light at your fingertips.

Discover our new range of fully tactile and recessed LED light controllers. Fluid and highly accurate, choose the intensity and colour of your flex LED light with the tip of your finger.

**288 W**  
**24 V**



**PILOTdrive-1**  
Monochrome ribbon controller  
3 x 4A - 12-24V - 12A max.

Code : H10560



Function:  
- Dimmer 5% to 100% monochrome  
- Direct access to a recorded scene  
- «30S» Extinction of the ribbon after 30 seconds  
Power supply: 12 - 24V DC  
Intensity (Max load in amperes) : 4A x 3 (outputs) = 12A max  
Dimensions: 86 x 86 x 36 mm  
Weight: 208 g

**192W**  
**24 V**



**PILOTdrive-2**  
Controller for warm and cold white ribbons  
2 x 4A - 12 - 24V - 8A max.

Code : H10561



Function:  
- Dimmer 5% to 100% warm/cold white  
- Direct access to a recorded scene  
- "Mode" to switch between hot and cold  
Power supply: 12 - 24V DC  
Intensity (Max load in amperes) : 4A x 2 (outputs) = 8A max  
Dimensions: 86 x 86 x 36 mm  
Weight: 208 g

**NEW** **288 W**  
**24 V**



**PILOTdrive-3 MKII**  
RGB Ribbons control + Power - 3x4A - 12-24V - 12A max.

Code : H10990



Function:  
- RGB Dimmer 5 % à 100 %  
- Direct access to a saved scene  
- 11 preset modes

Format : Wall-mountable  
Power supply: 12 - 24 V DC  
Intensity (Max load, in Amps): 4 A x 3 (outputs) = 12 A max  
Dimensions: 86 x 86 x 36 mm  
Weight: 208 g

**384 W**  
**24 V**



**PILOTdrive-4**  
RGBW ribbon controller  
4 x 4A - 12-24V - 16A max.

Code : H10563



Function:  
- Dimmer 5% to 100% RGBW  
- Direct access to a recorded scene  
- 12 modes- Direct access to white (fixed + step + fade colours)  
Power supply: 12 - 24V DC  
Intensity (Max load in amperes) : 4A x 4 (outputs) = 16A max  
Dimensions: 86 x 86 x 36 mm  
Weight: 208 g

**2,4 GHz** **DMX**  
**1 CH**



**PILOTctl-1**  
DMX controller + 2,4 GHz -1 zone - 1 colour

Code : H10564



Function:  
- Dimmer 5% to 100% monochrome  
- Direct access to a recorded scene  
- «30S» Extinction of the ribbon after 30 seconds  
Power supply: 240V  
Output signal: 2,4 Ghz & DMX512  
Operating distance: 30m and 2,4 Ghz  
Dimensions: 112 x 112 x 48 mm  
Weight: 225 g

**2,4 GHz** **DMX**  
**2 CH**



**PILOTctl-2**  
DMX controller + 2,4 GHz -1 zone - 2 colours

Code : H10565



Function:  
- Dimmer 5% to 100% warm/cold white  
- Direct access to a recorded scene  
"Mode" to switch between warm and cold white  
Power supply: 240V  
Output signal: 2,4 Ghz & DMX512  
Operating distance: 30m and 2,4 Ghz  
Dimensions: 112 x 112 x 48 mm  
Weight: 225 g

**2,4 GHz** **DMX**  
**3 CH**



**PILOTctl-3**  
DMX controller + 2,4 GHz -1 zone - 3 colours

Code : H10566



Function:  
- Dimmer 5 % to 100 % RGB  
- Direct access to a recorded scene  
- 11 modes (fixed + step + fade colours)  
Power supply: 240V  
Output signal: 2,4 Ghz & DMX512  
Operating distance: 30m and 2,4 Ghz  
Dimensions: 112 x 112 x 48 mm  
Weight: 225 g

**2,4 GHz** **DMX**  
**4 CH**



**PILOTctl-4**  
DMX controller + 2,4 GHz -1 zone - 4 colours

Code : H10567



Function:  
- Dimmer 5% to 100% RGBW  
- Direct access to a recorded scene  
- 12 modes (fixed + step + fade colours)  
- Direct access to white on 4 zones  
Power supply: 240V  
Output signal: 2,4 Ghz & DMX512  
Operating distance: 30m and 2,4 Ghz  
Dimensions: 112 x 112 x 48 mm  
Weight: 225 g



# DMX DRIVERS

2,4 GHz 3 CH



**TAPEDRIVER-RF3**  
2.4GHz Controller  
3 channels - 5-24VDC 3 x 6A max.

Code : H10577



Mode of communication: 2.4GHz  
Power supply: 5 - 24V DC  
Intensity (max charge in amperes) :  
6A x 3 (outputs) = 18A max  
Power rating: 90W / 216W / 432W  
(5V / 12V / 24V)  
Compatible remote control :  
REMOTERF-8W & REMOTERF-10RGB  
Operating distance: 30m  
Dimensions: 175 x 44 x 30 mm  
Weight: 150 g

2,4 GHz RGB



**TAPEDRIVERTOUCH-RF3**  
Manual controller and 2.4GHz  
3 channels - 12-24V DC - 3x 5A max.

Code : H10578



Mode of communication: 2.4GHz or manual  
Power supply: 12 - 24V DC  
Intensity (max charge in amperes) :  
5A x 3 (outputs) = 15A max  
Power rating: 180 W / 360 W (12 V / 24 V)  
Compatible remote control :  
REMOTERF-10RGB  
Operating distance: 30m  
Dimensions: 211 x 40 x 30  
Weight: 180 g

2,4 GHz 4 CH



**TAPEDRIVER-RF4**  
2.4GHz Controller  
4 channels - 5-24VDC - 4 x 5A max.

Code : H10579



Mode of communication: 2.4GHz  
Power supply: 5 - 24V DC  
Intensity (max charge in amperes) :  
5A x 4 (outputs) = 20A max  
Power rating: 100 W / 240 W / 480 W  
(5 V / 12 V / 24 V)  
Compatible remote control :  
REMOTERF-8RGBW  
Operating distance: 30m  
Dimensions: 175 x 44 x 30 mm  
Weight: 150 g

8 zones WHITE



**REMOTERF-8W**  
2.4GHz remote controller  
8 zones - 1 colour

Code : H10569



Mode of communication: 2.4GHz  
Power supply: DC 5V (Lithium) - Mini  
USB rechargeable battery  
Number of controlled zones: 8 zones  
Driver pilot: TAPEDRIVER-RF3  
Operating distance: 30m

10 zones RGB



**REMOTERF-10RGB**  
2.4GHz remote controller  
10 zones - 3 colours

Code : H10570



Mode of communication: 2.4GHz  
Power supply: DC 5V (Lithium) - Mini  
USB rechargeable battery  
Number of controlled zones: 10 zones  
- Direct access to a recorded scene  
- 11 modes (fixed + step + fade colours)  
Driver pilot: TAPEDRIVER-RF3 and  
TAPEDRIVERTOUCH-RF3  
Operating distance: 30m

8 zones RGBW



**REMOTERF-8RGBW**  
Remote control, 2.4GHz 8 zones ribbon  
driver RF4

Code : H10571



Communication mode: 2.4GHz  
Power supply: DC 5V (Lithium) -  
Rechargeable battery in mini USB  
Number of controlled zones: 8 zones  
- Direct access to a recorded scene  
- 11 recorded modes (fixed colors + step  
+ fade)  
- Synchro mode on 1 zone  
Driver driven: TAPEDRIVER-RF4  
Operating distance: 30m



## NO WIRING BETWEEN THE DRIVERS

Our drivers are not wired together.  
The information sent by the remote control automatically  
synchronizes with the drivers thanks to the 2.4GHz Wi-Fi  
technology.



### TAPEDRIVER-1

DMX controller for ribbons  
1 channel - 12-24VDC - 6A max.

Code : H10573



For monochrome ribbon  
DMX 1 channel  
144W under 24V  
Dimmer by dip-switches  
Command in 0-10V control



### TAPEDRIVER-3

DMX controller for ribbons  
3 channels - 12-24VDC - 3 x 2A max.

Code : H10574



For RGB ribbon  
DMX 3 channels  
144W under 24V  
Choice of programs and colours by  
dip-switches



### LED DMX-CONTROL SCREW MK2

360W/24V LED Ribbon Controller

Code : B05399



For monochrome and RGB ribbon  
DMX 4 channels  
60 W/ channel = 180 W under 12 VDC  
120 W/ channel = 360 W under 24 VDC  
Choice of programs and colours by  
dip-switches  
WTR-DMX DONGLE compatible



### LED DMX-CONTROL XLR Mk2

LED controller - DMX - 240W/24V

Code : B05401



For monochrome and RGB ribbon  
DMX 4 channels  
40 W/ channel = 120 W under 12 VDC  
80 W/ channel = 240 W under 24 VDC  
Choice of programs and colours by  
dip-switches and DMX



### TAPEDRIVER-4

DMX controller for ribbons  
4 channels - 12-24VDC - 4 x 2.5A max.

Code : H10575



For RGBW ribbon  
DMX 4 channels  
240 W under 24 V  
Choice of programs and colours by  
dip-switches



### TAPEDRIVER-12

DMX controller for ribbons  
12 channels - 12-24VDC - 12 x 5A max.

Code : H10576



For all types of 24V ribbons  
DMX 12 channels  
1440 W under 24 V



## DMX OPERATION

Example for a RGB ribbon  
(3 channels)

Channel 1 : Red  
Dimmer 0%-100%

Channel 2 : Green  
Dimmer 0%-100%

Channel 3 : Blue  
Dimmer 0%-100%

# BOOSTERS AND MANAGERS



**TAPEDIMMER**  
Dimmer for monochrome ribbon  
24V - 432 Watts maximum

Code : H9866



Compatible with monochrome ribbons  
Rotary potentiometer to adjust the output level  
Power supply: 24 V DC  
Maximum power: 432W in 24V -  
Dimensions: 112 x 65 x 24 mm  
Weight: 0.5 Kg



**LED 1CH DIM WALL**  
12V / 24V Wall dimmer

Code : B05392



Compatible with monochrome ribbons  
Rotary potentiometer to adjust the output level  
IR remote control for M/A, standby, dimmer, 4 levels.  
Power supply: 12 or 24V DC  
Maximum power: 160W in 24V - 80W in 12V  
Dimensions: 87 x 87 x 53 mm (box)  
Weight: 0.150 Kg



**DOORSENSOR**  
Door opening sensor 24V 2A max

Code : H11036



Compatible with monochrome tapes  
Operating distance 3-8 cm  
On off with blind  
Power supply: 24 V DC  
Maximum power: 50w



**LED WALL DIMMER**  
Compact RGB remote control for LED projectors

Code : B04936



Compatible with 3-colour and monochrome ribbons:  
Colour adjustment by potentiometer (with access to a fade program)  
Adjustment of brightness/strobe by potentiometer  
Setting the speed in Fade mode  
2 adjustment memories  
1 bouton Black Out (ON/OFF)  
DMX 4 channels:  
Red, Green, Blue, General/Strobe Dimmer  
Power supply: DC12V - 1A (not provided)  
Dimensions: 84 x 83 x 40 mm  
Weight: 0.5 kg



## TAPEBOOSTER-RGBW

Compatible with 4-colour, 3-colour and monochrome ribbons, this signal booster increases the number of ribbons connected on a serial controller.

Combined with a suitable power supply, it amplifies the received signal and allows you to connect more ribbons to the same controller for longer hose lengths without discontinuity or difference in brightness.



### TAPEBOOSTER-1X10A

1 channel booster - 12-24V DC - 10A max

Code : H10769



Compatible with monochrome ribbons  
 Supply voltage: DC12V-24V  
 Maximum output load: 10A/CHx1  
 Output signal: MLI constant voltage  
 Maximum output power: 120W(12V) / 240W(24V)  
 Dimensions: 125 x 45 x H36 mm  
 Weight: 0.100 kg



### TAPEBOOSTER

RGB signal amplifier  
 24V - 576 Watts maximum

Code : H9865



Compatible with 3-colour and monochrome ribbons  
 Supply voltage: DC 24V  
 Maximum output load: 3x8A  
 Output signal: MLI constant voltage  
 Maximum output power: 576W(24V)  
 Dimensions: 107 x 65 x 24 mm  
 Weight: 0.5 kg



### TAPEBOOSTER-RGBW

4 channel booster - 5-24V DC  
 3 x 3A + 1 x 9A max.

Code : H10770



Compatible with 4-colour, 3-colour and monochrome ribbons  
 Supply voltage : DC5V-DC24 V  
 Maximum output load:  
 - RGB : 3Ax3CH  
 - W : 9Ax1CH  
 Output signal: MLI constant voltage  
 Maximum output power:  
 - RGB : 72Wx3CH  
 - W : 216W(24V)  
 Dimensions: 176 x 46 x 30 mm  
 Weight: 0.145 kg



### MICRO LED MANAGER Mk2

LED DMX Power supply 50W 24V cv

Code : B04950



Compatible with 3-colour and monochrome ribbons  
 Integrated power supply: DC24 V  
 Maximum output power:  
 - RGB : 16Wx3CH total 50W  
 Integrated switch controller for:  
 Master/Slave, 16 Colours, Musical, programs.  
 4-channel DMX operation  
 Connection for wall controller LED WALL DIMMER and ON / OFF switch  
 Power supply: AC230V - 50 Hz  
 Dimensions: 332 x 70 x 40 mm  
 Weight: 0.950 kg



### MINI LED MANAGER Mk3

LED DMX Power supply 100W 24V cv

Code : B04949



Compatible with 3-colour and monochrome ribbons  
 Integrated power supply: DC24 V  
 Maximum output power:  
 - RGB : 33Wx3CH total 100W  
 Integrated switch controller for:  
 Master/Slave, 16 Colours, Musical, programs.  
 4-channel DMX operation  
 Connection for wall controller LED WALL DIMMER and ON / OFF switch  
 Power supply: AC230V - 50 Hz  
 Dimensions: 356 x 132 x 43 mm  
 Weight: 1.9 kg



### LED RF-CONTROL DIM

1 channel single colour LED controller

Code : B05396



Compatible with monochrome ribbons  
 Power: DC12-24 V  
 Maximum output power:  
 - 240 W under 12 V  
 - 480 W under 24 V  
 HF remote control (433.92 MHz) integrated for:  
 M/A, stop 30s, dimmer, levels, night light  
 RJ45 connection for Master/Slave synchronization  
 Dimensions: 90 x 90 x 24 mm  
 Weight: 0.250 kg



### LED RF-CONTROL RGB

3-channel RGB controller

Code : B05397



Compatible with tricolour ribbons  
 Power: DC12-24 V  
 Maximum output power:  
 - 240 W under 12 V  
 - 480 W under 24 V  
 HF remote control (433.92 MHz) integrated for:  
 M/A, stop 30s, dimmer, levels, night light  
 RJ45 connection for Master/Slave synchronization  
 Dimensions: 90 x 90 x 24 mm  
 Weight: 0.250 kg



# POWER SUPPLIES

**A**



**POW2411P**  
Waterproof power supply for ribbon  
24V DC - 30 Watts maximum

Code : H9881



**B**



**EIP 060V0240LS**  
Switching power supply - 24Vdc/60W

Code : B05390



**C**



**POW242**  
Power supply  
24V - 50 Watts max - IP20

Code : H9807



**D**



**POW244IP2**  
Power supply 24VDC 4.15A  
100W max - IP65 - 2 outputs

Code : H10362



**E**



**LRS-100-24**  
Power supply MeanWell 24v DC  
100W, IP20 - 2 exits

Code : H10581



**F**



**DR120-24**  
Power supply MW  
120W Stabilized, for DIN rail

Code : H9926



**G**



**ESE 150-24S**  
Switching power supply - 24Vdc/150W

Code : B05398



**H**



**POW246IP2**  
Power supply 24VDC 6.25A  
150W max - IP65 - 2 outputs

Code : H10316



**I**



**RSP-200-24**  
Power supply MeanWell 24v DC  
200W, IP20 - 3 outputs

Code : H10582



**J**



**DRP240-24**  
Power supply MW  
240W Stabilized, for DIN rail

Code : H9927



**K**



**RSP-320-24**  
Power supply MeanWell 24v DC  
320W, IP20 - 3 outputs - vented

Code : H10583



**L**



**DRP480-24**  
Power supply MW  
480W Stabilized, for DIN rail

Code : H11150



**M**



**LRS-50-5**  
Power supply MeanWell 5v DC  
50W,IP20

---

Code : H10599

---



**N**



**LRS-100-5**  
Power supply MeanWell 5v DC  
100W,IP20 - 2 outputs

---

Code : H10600

---



**O**



**LRS-200-5**  
Power supply MeanWell 5v DC  
200W,IP20 - 3 outputs

---

Code : H10971

---



	Reference	Code	Output voltage	Intensity	Power	Number of outputs	Format	IP	Dimensions
A	POW241IP	H9881	24V	1 A	30 W	1	-	IP65	218 x 30 x 22
B	EIP 060V0240LS	B05390		2.5 A	60W	1	-	IP20	157 x 54 x 36
C	POW242	H9807		2.1 A	50 W	1	-	IP20	125 x 52 x 36
D	POW244IP2	H10362		4 A	100 W	2	-	IP65	240 x 68 x 57
E	LRS-100-24	H10581		4.5A	100 W	2	To be integrated	IP20	129 x 97 x 30
F	DR120-24	H9926		5 A	120 W	2	Rail	IP20	65.5 x 125.2 x 100
G	ESE 150-24S	B05398		6.25 A	150 W	2	To be integrated	IP20	159 x 97 x 30
H	POW246IP2	10316		6.5 A	150 W	2	-	IP65	240 x 68 x 57
I	RSP-200-24	10582		8.4 A	200 W	3	To be integrated	IP20	215 x 115 x 30
J	DRP-240-24	9927		10 A	240 W	2	Rail	IP20	125.5 x 125.2 x 100
K	RSP-320-24	10583		13.4 A	320 W	3	To be integrated	IP20	215 x 115 x 3
L	DRP-480-24	9928		20 A	480 W	2	Rail	IP20	85,5 x 125,2 x 128,5
M	LRS-50-5	H10599		5V	10 A	50 W	1	To be integrated	IP20
N	LRS-100-5	H10600	20 A		100 W	1	To be integrated	IP20	129 x 97 x 30
O	LRS-200-5	H10971	40A		200W	3	To be integrated	IP20	215 x 115 x 30



## HOW TO CHOOSE A POWER SUPPLY?

What is the consumption of a ribbon in W and which power supply should I choose?

### Example:

9m of RGB ribbon with 60 LEDs/m 14.4 W/m in 24 V (COLOURTAPE6065)

Consumption of a length L of ribbon (in W) = length (m) x power/meter (w/m)  
The ribbon will consume  $14.4 \times 9 = 129.6$  W

### Power supply choice:

An additional 10% of power must be added to the power supply.

In the same example:

$129.6 + 10\% = 142.56$  W

POW246IP2 which is 150W





# ACCESSORIES FOR RIBBONS

## ALUMINIUM PROFILES

**NEW**



**TAPEprofil-E** Aluminium profile 11x20mm  
length 2m  
Code : H11059

**Contest** 


**TAPEprofil-A** Flush-mounted aluminium profile  
8.5 x 23 mm  
Length 2m  
Code : H10619

**Contest** 

**TAPEprofil-B** Aluminium profile 15 x 17 mm  
Length 2m  
Code : H10620

**Contest** 



**ALU-CORNER-15MM (2M)** Corner profile  
Code : B05376

**JBSYSTEMS** 



**TAPEprofil-C** 19 x 19 mm aluminium profile  
45°  
Length 2m  
Code : H10621

**Contest** 

**ALU-RECESS-15MM (2M)** High profile to be recessed  
Code : B05371

**JBSYSTEMS** 



**ALU-SURFACE-7MM (2M)** Low Profile  
Code : B05372

**JBSYSTEMS** 




**ALU-SURFACE-15MM (2M)** High Profile  
Code : B05374

**JBSYSTEMS** 



**TAPEprofil-D** Aluminium profile double width 15  
x 24 mm Length 2m  
Code : H10622


**Contest** 

**NEW**

**TAPEprofil-F** Aluminium profile stair nosing  
length 2m  
Code : H11065


**Contest** 

## CLIP FOR PROFILE

**TAPEclip-B** Fastening clip for profile B  
Code : H10633

**Contest** 




**TAPEclip-C** Fastening clip for C-profile  
Code : H10634

**Contest** 



**TAPEclip-D** Fastening clip for profile D  
Code : H10635

**Contest** 




**NEW**


**TAPEclips-E** Fastening clips for E-Profile  
Code : H11064


**Contest** 





## DIFFUSERS


	<p><b>TAPEcov-1</b> Crystal Diffuser for A,B,C Profiles Length 2m</p> <p>Code : H10623</p> <p><b>Contest</b> </p>
---	--

	<p><b>TAPEcov-2</b> Frost diffuser for profiles A,B,C Length 2m</p> <p>Code : H10624</p> <p><b>Contest</b> </p>
---	--

	<p><b>TAPEcov-3</b> Milk diffuser for A,B,C profiles Length 2m</p> <p>Code : H10625</p> <p><b>Contest</b> </p>
---	---

	<p><b>TAPEcov-4</b> Crystal Diffuser for D-Profiles Length 2m</p> <p>Code : H10626</p> <p><b>Contest</b> </p>
---	--

	<p><b>TAPEcov-5</b> Frost diffuser for D-Profiles Length 2m</p> <p>Code : H10627</p> <p><b>Contest</b> </p>
---	--

	<p><b>TAPEcov-6</b> Milk Diffuser for D" Profiles Length 2m</p> <p>Code : H10628</p> <p><b>Contest</b> </p>
---	--

<b>NEW</b> 	<p><b>TAPEcov-7</b> Diffuser Milk for TAPEprofil-E Length 2m</p> <p>Code : H11060</p> <p><b>Contest</b> </p>
--	--

<b>NEW</b> 	<p><b>TAPEcov-8</b> Square diffuser Milk for TAPEprofil-E Length 2m</p> <p>Code : H11062</p> <p><b>Contest</b> </p>
--	---

<b>NEW</b> 	<p><b>TAPEcov-9</b> Diffuser Dome Milk TAPEprofil-F Length 2m</p> <p>Code : H11057</p> <p><b>Contest</b> </p>
---	--

## TERMINATION COVER

	<p><b>TAPEcaps-A</b> Termination cover for profile A</p> <p>Code : H10629</p> <p><b>Contest</b> </p>
---	---

	<p><b>TAPEcaps-B</b> Termination cover for profile B</p> <p>Code : H10630</p> <p><b>Contest</b> </p>
---	---

	<p><b>TAPEcaps-C</b> Termination cover for C-profile</p> <p>Code : H10631</p> <p><b>Contest</b> </p>
---	---

	<p><b>TAPEcaps-D</b> Termination cover for D-profile</p> <p>Code : H10632</p> <p><b>Contest</b> </p>
---	---

<b>NEW</b> 	<p><b>TAPEcaps-E7</b> TAPEprofil-E and TAPEcov-7 termination cover</p> <p>Code : H11061</p> <p><b>Contest</b> </p>
---	---

<b>NEW</b> 	<p><b>TAPEcaps-E8</b> TAPEprofil-E and TAPEcov-8 termination cover</p> <p>Code : H11063</p> <p><b>Contest</b> </p>
---	---

<b>NEW</b> 	<p><b>TAPEcapsl-F</b> Termination cover left for TAPEprofil-F</p> <p>Code : H11149</p> <p><b>Contest</b> </p>
---	--

<b>NEW</b> 	<p><b>TAPEcapsr-F</b> Termination cover right for TAPEprofil-F</p> <p>Code : H11058</p> <p><b>Contest</b> </p>
---	---



# ACCESSORIES FOR RIBBONS



**TCO-2**  
T connector for 10 mm monochrome ribbons

Code : H10549




**TCO-3**  
T connector for 2-colour 10 mm ribbons

Code : H10552



**TCO-4**  
T connector for 10 mm 3-colour ribbons

Code : H10555

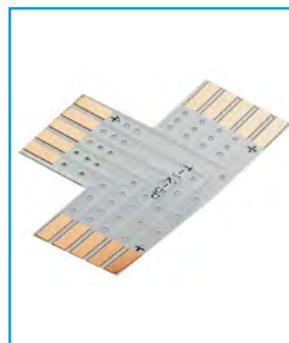


**TCO-5**  
T connector for 12 mm 4-colour ribbons

Code : H10558




**XCO-2**  
X connector for 10 mm monochrome ribbons

Code : H10550

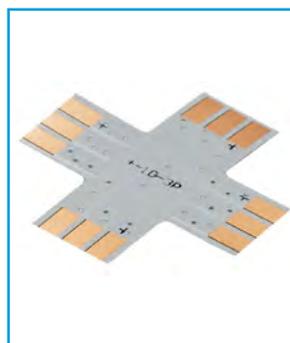


**XCO-3**  
X connector for 2-colour ribbons 10 mm

Code : H10553

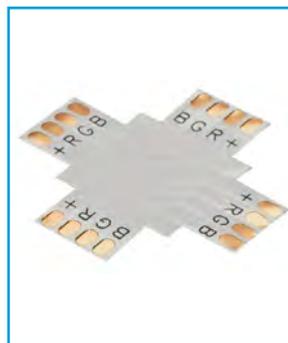

**XCO-4**  
X connector for 10 mm 3-colour ribbons

Code : H10556

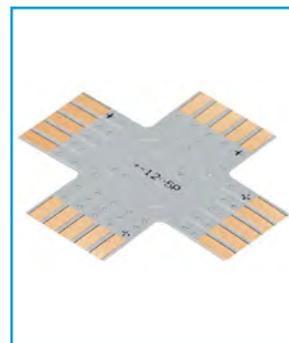

**XCO-5**  
X connector for 12 mm 4-colour ribbons

Code : H10559



**LCO-2**  
L connector for 10 mm monochrome ribbons

Code : H10548




**LCO-3**  
L connector for 2-colour ribbons 10 mm

Code : H10551



**LCO-4**  
L connector for 10 mm 3-colour ribbons

Code : H10554

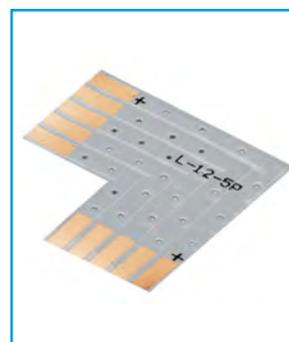

**LCO-5**  
L connector for 12 mm 4-colour ribbons

Code : H10557





A	H10637	PILOTBOX - Recessed square box 47 mm white	CONTEST®
B	H10638	PILOTSCREW - Screw steel size M3.5x20 - 1 piece (2 are needed by PILOTBOX)	CONTEST®
C	H10544	ADF1050 - Double sided adhesive width 10 mm - roll of 50 m - 3M 300LSE	CONTEST®
D	H10545	ADF1250 - Double sided adhesive width 12 mm - roll of 50 m - 3M 300LSE	CONTEST®
E	H10546	FLATCABLE-4 Flat cable 4 x 0.326mm <sup>2</sup> N/G/R/B - 10m	CONTEST®
F	H10547	FLATCABLE-5 - Flat cable 5 x 0,326mm <sup>2</sup> N/G/R/B/Y- 10m	CONTEST®
G	H9887	TAPELINK20 - 4-wire cords with F/F-IP20 connectors	CONTEST®
H	H9888	TAPECON4FF - 4-pin connector F / F-IP20 pack of 20	CONTEST®
I	H9883	TAPEFIX65 - Set of 15 bridges, 5 endcaps, 1 Silicone Tube	CONTEST®
J	H9884	TAPELINK61 - 4-wire cords with M/F-IP61 connectors - black	CONTEST®
K	H9885	TAPELINK65 - Connect 4-wire cords. M/F-IP65 - transparent	CONTEST®
L	H9886	TAPELINK68 - 4-wire cords M/F-IP68 connectors - white	CONTEST®
M	H9882	TAPEFIX68 - Set of 15 bridges, 5 endcaps, 1 Silicone Tube	CONTEST®
N	H9808	RGBB-100 - 4-wire electric cable for 3-colour ribbons of 50 meter	CONTEST®



Ribbon type



FLEX LED PIXEL

Monochrome/UV/Blue

W/WW

RGB

RGBW




PILOTdrive-1	H10560	✓	-	-	-	-
PILOTdrive-2	H10561	-	✓	-	-	-
PILOTdrive-3 MKII	H10990	-	-	✓	-	-
PILOTdrive-4	H10563	-	-	-	✓	-
TAPEDIMMER	H9866	✓	-	-	-	-
LED 1CH DIM WALL	B05392	✓	-	-	-	-
TAPEDRIVER-1	H10573	✓	-	-	-	-
LED DMX-CONTROL SCREW MK2	B05394	-	-	✓	-	-
TAPEDRIVER-3	H10574	✓	✓	✓	-	-
TAPEDRIVER-4	H10575	✓	✓	✓	✓	-
TAPEDRIVER-12	H10576	✓	✓	✓	✓	-
MICRO LED MANAGER Mk2	B04936	-	-	✓	-	-
MINI LED MANAGER Mk3	B04949	-	-	✓	-	-
TAPEDRIVER-RF3	H10577	✓	-	✓	-	-
TAPEDRIVERTOUCH-RF3	H10578	-	-	✓	-	-
TAPEDRIVER-RF4	H10579	-	-	-	✓	-
TAPEDRIVER-WIFI4	H10580	✓	✓	✓	✓	-
LED RF-CONTROL DIM	B05396	✓	-	-	-	-
LED RF-CONTROL RGB	B05397	-	-	✓	-	-
TAPELIVE4	H10572	✓	✓	✓	✓	-
DOORSENSOR	H11036	✓	-	-	-	-
SmartCTL-BTM	H11038	-	-	-	-	✓
SmartCTL-BTL	H11037	-	-	-	-	✓
SMART-CTL800	H10949	-	-	-	-	✓




	TAPEDRIVER-RF3 10577	TAPEDRIVERTOUCH- -RF3 10578	TAPEDRIVER-RF4 10579	TAPEDRIVER-WiFi4 10580	TAPELIVE4 10572	TAPEDRIVER1 10573	TAPEDRIVER3 10574	TAPEDRIVER4 10575	TAPEDRIVER12 10576	MINI LED MANAGER MK3 B04949	MICRO LED MANAGER MK2 B06950
REMOTERF-8W H10569	✓	-	-	-	-	-	-	-	-	-	-
REMOTERF-10RGB H10570	✓	✓	-	-	-	-	-	-	-	-	-
REMOTERF-8RGBW H10571	-	-	✓	-	-	-	-	-	-	-	-
PILOTctl-1 H10564	-	-	-	✓	-	✓	-	-	-	-	-
PILOTctl-2 H10565	-	-	-	✓	-	-	✓	-	-	-	-
PILOTctl-3 H10566	-	-	-	✓	-	-	-	-	-	-	-
PILOTctl-4 H10567	-	-	-	✓	-	-	-	✓	-	-	-
PILOTctl-16 H10568	-	-	-	✓	-	-	✓	✓	✓	-	-
Téléphone/Tablette	-	-	-	-	✓	-	-	-	-	-	-
TAPELIVE4 H10572	-	-	-	✓	-	-	-	-	-	-	-
Controleur DMX	-	-	-	-	-	✓	✓	✓	✓	-	-
LED WALL DIMMER B04936	-	-	-	-	-	-	-	-	-	✓	✓
LEDCON-02 MK2 B06660	-	-	-	-	-	-	-	-	-	✓	✓



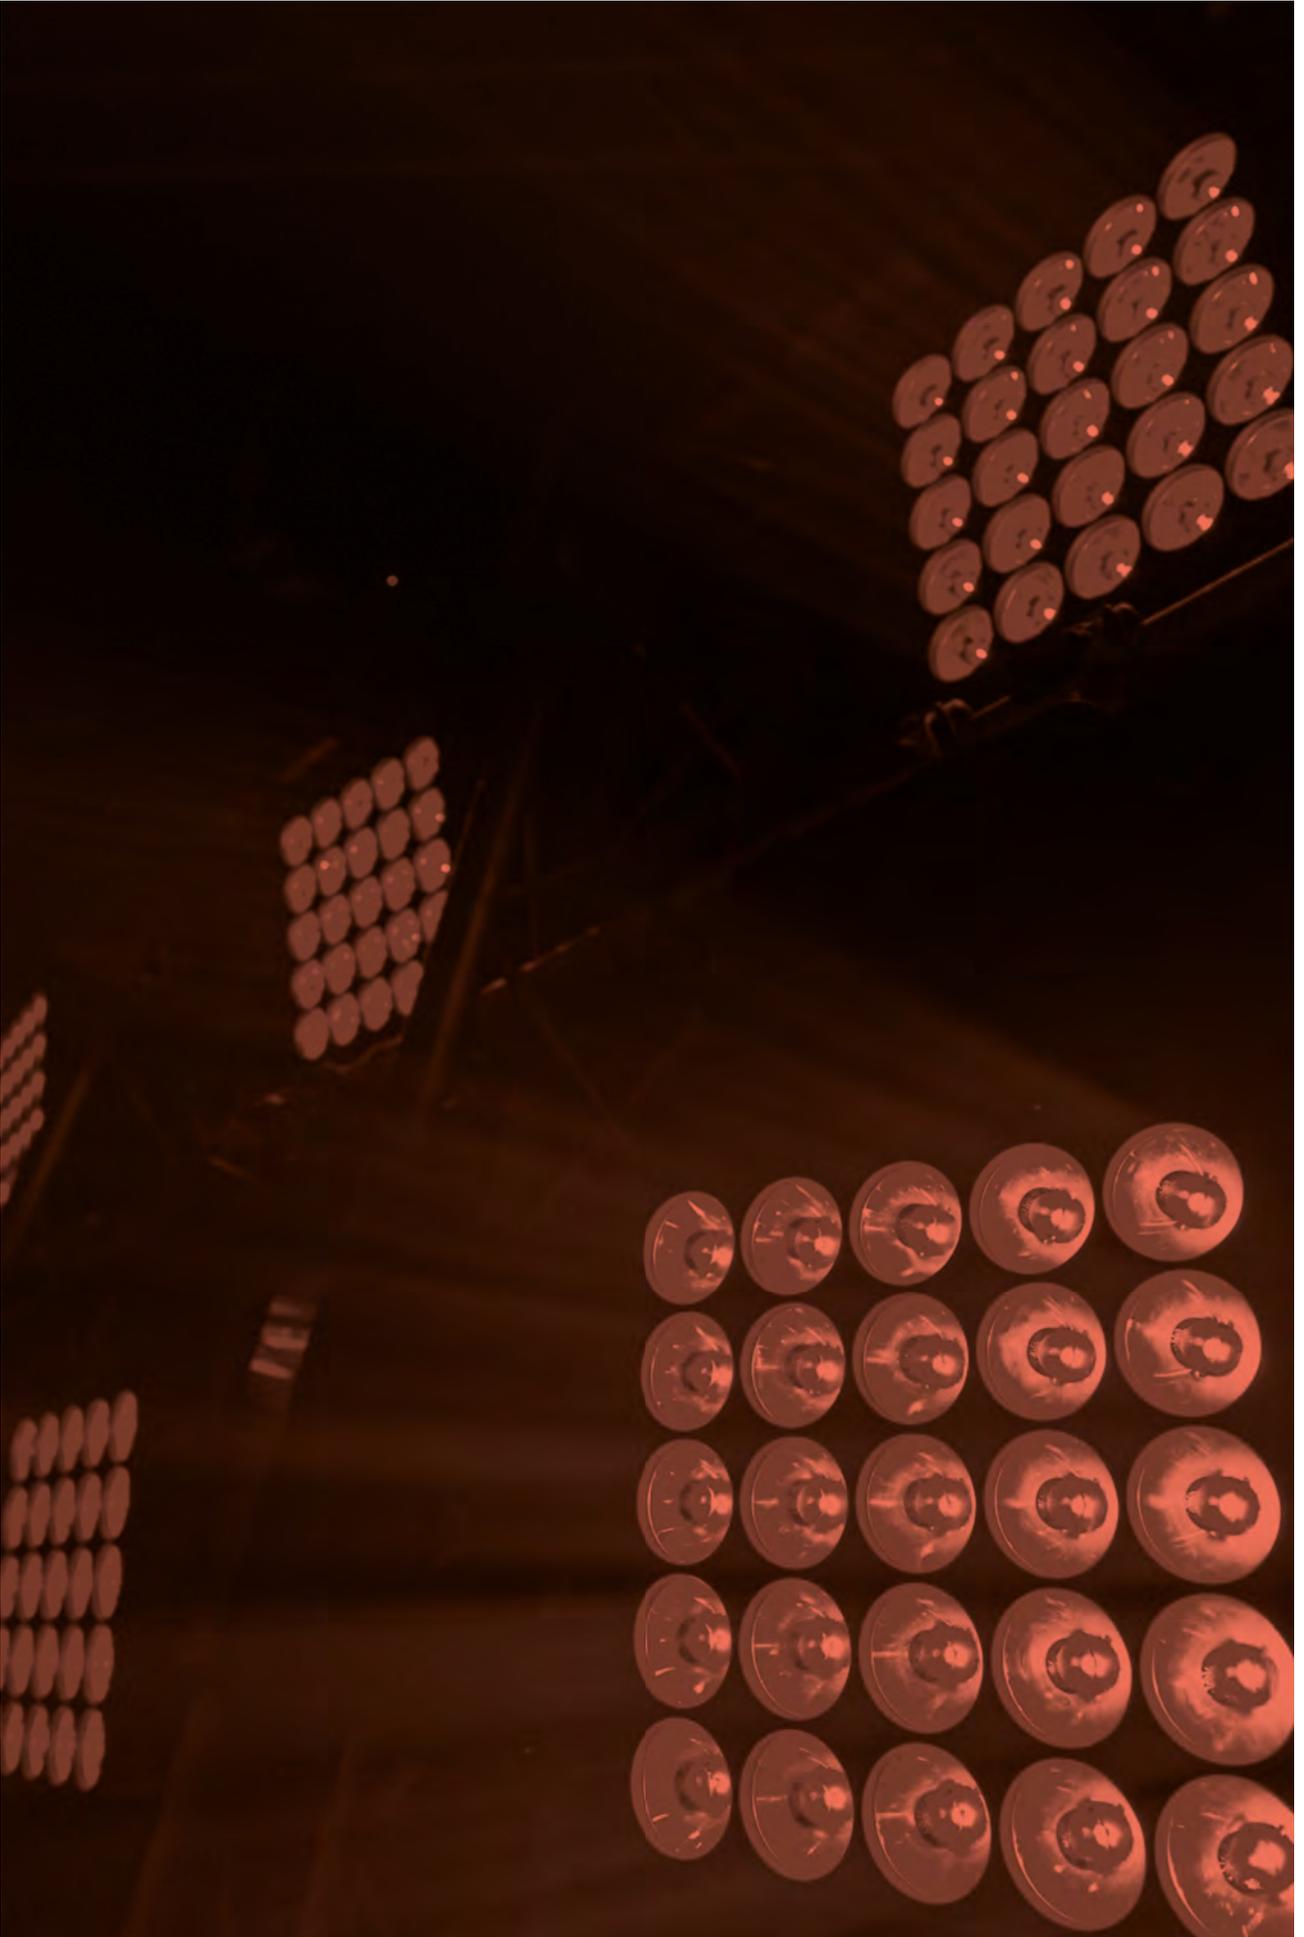

# LIGHTING

OUTDOOR SPOTLIGHTS  
AMBIENT SPOTLIGHTS  
BATTERY PORTABLE PROJECTORS  
SCENOGRAPHY PROJECTORS  
FLAT PROJECTORS  
PAR PROJECTORS  
TRADITIONAL PROJECTORS  
BLINDERS & PROJECTORS  
FLOOD PROJECTORS  
MOVING HEAD  
ANIMATION EFFECTS  
LASERS  
STROBOSCOPES  
MIRROR BALLS  
CHROMATEQ®  
SWEETLIGHT  
BT-NODE  
DMX CONTROLLERS  
HOIST SYSTEM CONTROLLERS

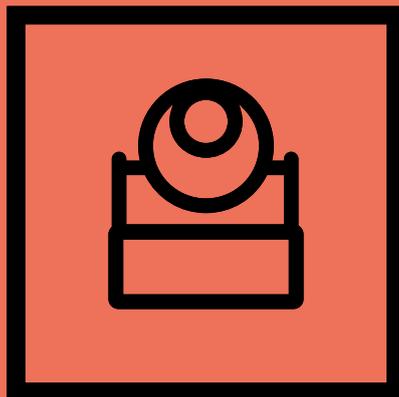

# OUTDOOR PROJECTORS



**NEW**



WW IP65 130W WW 15° 35°

**BT-SUNRAY 130R**  
COB projector (3000K, CRI→97) with amber drift effect. IP65

Code : B05525



Powerful 130W white COB projector (3000K) with amber drift effect, behaves exactly like a halogen blinder!  
Waterproof IP65 rating  
Led strobe  
Preprogrammed amber drift effect and/ or separate control for white/amber!  
Tunable CCT: from 1700K to 3000K  
Very high CRI-factor (CRI: 97 – R9: 89) for perfect color rendering.  
4 DMX-modes  
Flicker-free  
Very high 16kHz LED refresh rate  
Different accessories included:  
2 compound eye lenses with beam angles: 15° and 35°  
1 blinder glass (authentic blinder look)  
1 gel frame (install optional CTO / CTB / COLOR filters)  
1 glare shield (anti-glare and better beam)



**NEW**



**BT-BARN 4**  
Optional barndoor designed for BT-COLORAY MULTI and BT-SUNRAY 130R

Code : B05527



This 4-leaf barndoor helps delimiting the beam in certain directions.  
Designed for use with: BT-COLORAY MULTI  
BT-SUNRAY 130R  
Can be used in combination with the lenses or color filter frame.  
Can be used outdoor.  
This 4-leaf barndoor helps delimiting the beam in certain directions.  
Designed for use with: BT-COLORAY MULTI & BT-SUNRAY 130R

**NEW**



R G B IP65 120W RGBW 15° 35°

**BT-COLORAY MULTI**  
IP65,120W RGBW LED projector

Code : B05524



Powerful 120W RGBW  
IP65 waterproof housing  
2 lenses with beam angles: 15° and 35°.  
1 Anti-glare cylinder (anti-glare and better beam)  
Flicker-free  
3 DMX modes: 4, 6 and 7 channels.  
RDM functionality to facilitate remote configuration  
OLED display with backlit touch buttons  
2 lenses with beam angles: 15° and 35°.  
1 Anti-glare cylinder (anti-glare and better beam)





IP65 144W RGBW 20°

### BT-ColoRay 18FCR

LED proj. 144W RGBW 20° (IP-POWER)

Code : B05512



Optics: 8x18W RGBW LED  
Opening angle: 20°  
Integrated control unit with LCD display with drop-down menu  
DMX IN and OUT with 5-pin XLR plugs with waterproof plug  
POWER IN/OUT with original NEUTRIK PowerCon® TRUE1 connectors  
Power supply: 100-240V/50-60Hz  
Power consumption: 129 W  
Waterproofing level: IP65  
Waterproof fan  
Depressurisation valve with waterproof membrane  
Finish: cast aluminium painted black  
Dimensions : 305 x 273 x 192 mm  
Weight: 5,28 kg



IP65 120W RGBW 15°

### BT-ColoRay 120R

LED proj. 120W RGBW COB 13° RENTAL (IP-POWER)

Code : B05509



Optics: 1x 120W RGBW COB LED  
Opening angle: 15°  
Integrated control unit with LCD display with drop-down menu  
DMX IN and OUT with 5-pin XLR plugs with waterproof plug  
POWER IN/OUT with original NEUTRIK PowerCon® TRUE1 connectors  
Power supply: 100-240V/50-60Hz  
Power consumption: 129 W  
Waterproofing level: IP65  
Waterproof fan  
Depressurisation valve with waterproof membrane  
Finish: cast aluminium painted black  
Dimensions: 304 x 188 x 272 mm  
Weight: 4.8 kg



IP65 60W RGBW 15°

### BT-ColoRay 60R

LED proj. 60W RGBW 15° RENTAL COB (IP-POWER)

Code : B05510



Optics: 1x 60W RGBW COB LED  
Opening angle: 15°  
Integrated control unit with LCD display with drop-down menu  
DMX IN and OUT with 5-pin XLR plugs with waterproof plug  
POWER IN/OUT with original NEUTRIK PowerCon® TRUE1 connectors  
Power supply: 100-240V/50-60Hz  
Power consumption: 70 W  
Waterproofing level: IP65  
Waterproof fan  
Depressurisation valve with waterproof membrane  
Finish: cast aluminium painted black  
Dimensions: 304 x 188 x 272 mm  
Weight: 4.8 kg



### PROJECTOR CASE 3

Can contain 6 projectors (BT-Coloray series, Stage Beamer, Pro Beamer, BT-Smartzoom)

Code : B03280



IP66 7x12W RGBW 8°-40° ZOOM

### PRO BEAMER ZOOM - RENTAL

8° - 40° motorised zoom

Code : B04399



Optics: 7x12W RGBW LEDs  
Two zones (outer ring + centre)  
Zoom opening angle: 8° to 40°  
Integrated control unit with display with drop-down menu  
SEETRONIC® DMX IN and OUT with 3-pin XLR plugs with waterproof plug  
SEETRONIC® POWER IN/OUT  
3-pole plugs with waterproof plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 128W  
Waterproofing level: IP66  
Natural convection cooling  
Depressurisation valve with waterproof membrane  
Finish: cast aluminium painted black  
Dimensions: 355 x 191 x 236 mm  
Weight: 7.3 kg



IP65 14x5W RGBW 14°

### STAGE BEAMER FC - OUTDOOR

14x5W RGBW 14° - IP65

Code : B05511



Optics: 14x5W RGBW LEDs  
Opening angle: 14°  
Integrated control unit with display with drop-down menu  
Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
Power supply: 100-240V/50-60Hz  
Power consumption: 65W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium painted black  
Dimensions: 245 x 205 x 245 mm  
Weight: 4.96 kg



### BARN-STAGE BEAMER

Stage Beamer barndoor

Code : B04342



Compatible IP cables	Product concerned
B01425 - True1/XLR-3P 1,5M	BT-Sunray 130R BT-COLORAY MULTI BT-COLORAY 18FCR BT-COLORAY 120R BT-COLORAY 60R PRO BEAMER ZOOM-RENTAL
B01426 - True1/XLR-3P 3M	
B01427 - True1/XLR-3P 5M	
B04911 - POWERLINK CABLE 1,5 M	Stage Beamer FC-OUTDOOR
B04913 - POWERLINK CABLE 10M	
B04324 - POWERLINK CABLE 5M	
B04908 - SIGNAL LINK CABLE 1,5M	
B04904 - SIGNAL LINK CABLE 10M	
B04903 - SIGNAL LINK CABLE 5M	
B05157 - LDP-Powercable 2M	
B05158 - LDP-Powercable 5M	

# OUTDOOR PROJECTORS

Enhance your buildings with all the power of the CONTEST® IPANELs. Discover the benefit of mixing power with the opening angle.




R
G
B
W

IP65
24x10W  
RGBW
31°

**IPANEL24x10QC**  
Projector with 24x10W QC IP65 LEDs

---

Code : H10794

---




**FLY4IPANEL**  
Flight case for 4 IPANEL24x10QC

---

Code : H10866

---




**IPANEL24x10QC-BARN**  
Leaves for IPANEL24x10QC

---

Code : H10889

---



Optics: 24x10W RGBW 4-Zone LEDs  
 Opening angle: 31°  
 Integrated control unit with display with drop-down menu  
 DMX mode from 2 to 20 channels, master/slave, manual mode, presets and integrated show, choice of dimmer curves.  
 Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
 Power supply: 100-240V/50-60Hz  
 Power consumption: 240 W  
 Waterproofing level: IP65  
 Natural convection cooling  
 Finish: cast aluminium painted black  
 Dimensions: 582 x 270 x 178 mm  
 Weight: 15 kg



IP65 150W COB 60°

**LDP-COBWASH 150TC**  
150W IP65 COB RVB LED

Code : B05170




Optics: 1x150W RGB COB LED  
Opening angle: 60°  
Infrared remote control  
Integrated control unit with display with drop-down menu  
Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
Power supply: 100-240V/50-60Hz  
Power consumption: 170W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Barndoor included  
Dimensions: 326 x 344 x 220 mm  
Weight: 9.5 kg



IP65 60W RGB 120°

**LDP-COBWASH 60TC**  
60W RGB IP65 COB LED projector

Code : B05171



Optics: 1x 60W RGB COB LED  
Opening angle: 120°  
Infrared remote control  
Integrated control unit with display with drop-down menu  
Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
Power supply: 100-240V/50-60Hz  
Power consumption: 66W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Barndoor option available  
Dimensions: 223 x 202 x 122 mm  
Weight: 8.2 kg



IP65 15W RGB 10°

**EZ-SPOT15 OUTDOOR**  
15W RGBW LED projector

Code : B05131



Optics: 1x15W RGBW LED  
Opening angle: 10°  
Infrared remote control IR-3  
Power supply: 100-240V/50-60Hz  
Power consumption: 27W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium painted black  
Dimensions: 152 x 133 x 90 mm  
Weight: 1.31 kg



WW IP65 15W WW 10°

**EZ-SPOT15 WW OUTDOOR**  
15W Warm White LED Projector

Code : B05141



Optics: 1x15W WW LED  
Opening angle: 10°  
Infrared remote control IR-3  
Power supply: 100-240V/50-60Hz  
Power consumption: 27W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium painted black  
Dimensions: 152 x 133 x 90 mm  
Weight: 1.31 kg



LDP-COBWASH



# OUTDOOR PROJECTORS



**CW** IP65 **50W** 5600K **120°**

**LDP-COBWASH 50CW**  
50W white IP65 COB LED Projector

Code : B05177



Optics: 1x 50W 5600K COB LED  
Opening angle: 120°  
Infrared remote control  
Integrated control unit with display with drop-down menu  
Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
Power supply: 100-240V/50-60Hz  
Power consumption: 66W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Barndoor option available  
Dimensions: 223 x 202 x 122 mm  
Weight: 3.8 kg



**WW** IP65 **50W** 3200K **120°**

**LDP-COBWASH 50WW**  
50W white COB IP65 LED projector

Code : B05178



Optics: 1x 50W 3200K COB LED  
Opening angle: 120°  
Infrared remote control  
Integrated control unit with display with drop-down menu  
Waterproof wiring for power supply inputs/outputs and DMX inputs/outputs  
Power supply: 100-240V/50-60Hz  
Power consumption: 66W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Barndoor option available  
Dimensions: 223 x 202 x 122 mm  
Weight: 3.8 kg



**LDP-COBWASH 50/60 BARNDOOR**

Code : B05191



Barndoor for:  
LDP-COBWASH 50WW  
LDP-COBWASH 50CW  
LDP-COBWASH 60TC.



**WW** IP65 **80W** 3000K **120°**

**LDP-FLOOD80-WW**  
IP65 projector with white LED

Code : B05117



Optics: 1x80W 3000K COB LED  
Opening angle: 120°  
Power supply: 100-240V/50-60Hz  
Power consumption: 80W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Dimensions: 288 x 360 x 110 mm  
Weight: 6.5 kg



**WW** IP65 **50W** 3000K **120°**

**LDP-FLOOD50-WW**  
IP65 projector with white LED

Code : B05116



Optics: 1x50W 3000K COB LED  
Opening angle: 120°  
Power supply: 100-240V/50-60Hz  
Power consumption: 50W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Dimensions: 290 x 236 x 150 mm  
Weight: 3.52 kg



**WW** IP65 **30W** 3000K **100°**

**LDP-FLOOD30-WW**  
IP65 projector with white LED

Code : B05115



Optics: 1x30W 300K COB LED  
Opening angle: 100°  
Power supply: 100-240V/50-60Hz  
Power consumption: 30W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Dimensions: 250 x 185 x 126 mm  
Weight: 2.3 kg



**WW** IP65 **10W** 3000K **120°**

**LDP-FLOOD10-WW**  
IP65 projector with white LED

Code : B05114



Optics: 1x10W Bridgelux® LED  
Opening angle: 120°  
Power supply: 100-240V/50-60Hz  
Power consumption: 10W  
Waterproofing level: IP65  
Natural convection cooling  
Finish: cast aluminium, painted white  
Dimensions: 115 x 86 x 105 mm  
Weight: 0.63 kg



**LDP-JUNCTION IP68**  
Waterproof connection box for the LDP series and other outdoor DMX projectors.

Code : B05112



Waterproof connection box for the LDP series and other outdoor DMX projectors. IP68 protection: Outdoor or even underground use.  
Power supply compartment with 3 input outlets  
DMX compartment with 4 input outlets  
Very easy and fast internal connection  
Ideal for the LDP series and any other combination of outdoor power/signal (PowerBeam lighting, LED Blaster, Powerbank, ...)

# OUTDOOR PROJECTORS








**LDP-COLORBAR 24FC**  
 Bar with 24x4W RGBW 15° 2-section LEDs - 96cm - IP20

Code : B05146









**LDP-COLORBAR 12FC**  
 Bar with 12x4W RGBW 15° 2-section LEDs - 48cm - IP20

Code : B05145




Optics: 24x4W RGBW 2-section LEDs  
 Opening angle: 15°  
 Integrated control unit with display with drop-down menu  
 Power supply input/output on IEC plug  
 DMX input/output on XLR 3-pin plug  
 Power supply: 100-240V/50-60Hz  
 Power consumption: 85 W  
 Waterproofing level: IP65  
 Natural convection cooling  
 Dimensions: 960 x 56 x 114/135 mm  
 Weight: 5 kg

Optics: 12x4W RGBW 4-section LEDs  
 Opening angle: 15°  
 Integrated control unit with display with drop-down menu  
 Power supply input/output on IEC plug  
 DMX input/output on XLR 3-pin plug  
 Power supply: 100-240V/50-60Hz  
 Power consumption: 56 W  
 Waterproofing level: IP65  
 Natural convection cooling  
 Dimensions: 460 x 56 x 114/135 mm  
 Weight: 3.6 kg



## Power Extenders and IP DMX cables



	Cables	Product concerned	
<b>A</b>	B04911 POWERLINK CABLE 1,5 M - Powerlink Cable 1,5M for Outdoor range	IPANEL, LDP-COBWASH150TC	Hilec®
<b>B</b>	B04913 POWERLINK CABLE 10m - Powerlink Cable 10m, for Outdoor range	IPANEL, LDP-COBWASH150TC	Hilec®
<b>C</b>	B04324 POWERLINK CABLE 5m - Powerlink Cable 5m, for Outdoor range	IPANEL, LDP-COBWASH150TC	Hilec®
<b>D</b>	B04908 SIGNAL LINK CABLE 1,5M - Signal Link Cable 1,5m for Outdoor range	IPANEL, LDP-COBWASH150TC LDP-COBWASH60TC/50CW/50WW LDP-COLORBAR24FC/12FC	Hilec®
<b>E</b>	B04904 SIGNAL LINK CABLE 10M - Signal Link Cable 10m, for Outdoor range	IPANEL, LDP-COBWASH150TC LDP-COBWASH60TC/50CW/50WW LDP-COLORBAR24FC/12FC	Hilec®
<b>F</b>	B04903 SIGNAL LINK CABLE 5M - Signal Link Cable 5m, for Outdoor range	IPANEL, LDP-COBWASH150TC LDP-COBWASH60TC/50CW/50WW LDP-COLORBAR24FC/12FC	Hilec®
<b>G</b>	B05157 LDP-Powercable 2M - Power cable L=2m	LDP-COBWASH60TC/50CW/50WW LDP-COLORBAR24FC/12FC	Hilec®
<b>H</b>	B05158 LDP-Powercable 5M - Power cable L=5m	LDP-COBWASH60TC/50CW/50WW LDP-COLORBAR24FC/12FC	Hilec®



# AMBIENT PROJECTORS




	IP20	96W RGBW	15°
--	------	-------------	-----

**LDP-COLORSTRIP 24FC**  
Bar with 24x4W RGBW 15° 4-section LEDs - 100cm - IP20

Code : B05144




	IP20	48W RGBW	15°
--	------	-------------	-----

**LDP-COLORSTRIP 12FC**  
Bar with 12x4W RGBW 15° 2-section LEDs - 50cm - IP20

Code : B05143




Optics: 24x4W RGBW 4-section LEDs  
Opening angle: 15°  
Integrated control unit with display with drop-down menu  
Power supply input/output on IEC plug  
DMX input/output on XLR 3-pin plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 85 W  
Waterproofing level: IP20  
Natural convection cooling  
Dimensions: 961 x 56 x 101/122 mm  
Weight: 3.6 kg

Optics: 12x4W RGBW 2-section LEDs  
Opening angle: 15°  
Integrated control unit with display with drop-down menu  
Power supply input/output on IEC plug  
DMX input/output on XLR 3-pin plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 56 W  
Waterproofing level: IP20  
Natural convection cooling  
Dimensions: 479 x 56 x 101/122 mm  
Weight: 2.2 kg

# AMBIENT PROJECTORS




**IP20**

**25°**

## TRI4U

Light bar with 4x3W LED tricolour projectors

Code : H9955



12x3W RGB LEDs located on 4 projectors  
 Opening angle: 25° per projector  
 Independent orientation per projector  
 Modes of operation:  
 - DMX  
 - Standalone  
 - Musical  
 - Master / slave  
 Specially designed hanging bracket with integrated hook for stand  
 Dimensions: 375 x 160 x 60 mm  
 Net weight: 2.5 Kg




**IP20**

**30°**


## MINITRUSS-6TCb

Truss light projector with 6x3W TRI LEDs

Code : H10365



Light source: 6x3W RGB LEDs  
 Opening angle: 30°  
 Modes of operation:  
 - DMX  
 - Standalone  
 - Musical  
 - Master / slave  
 Input/output on IEC plug  
 Power supply: 230V - 50Hz  
 Power consumption: 30W  
 Dimensions: 135 x 135 x 132 mm  
 Net weight: 1.4 kg

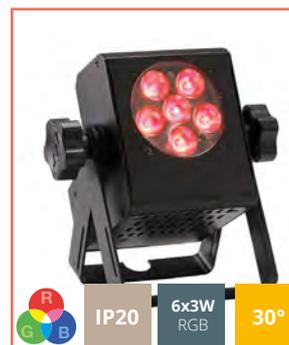


**IP20**

**30°**

## MINICUBE-6TCb

Compact projectors with 6x3W satin TRINoir LEDs

Code : H10147



Light source: 6x3W RGB LEDs  
 Opening angle: 30°  
 Modes of operation:  
 - DMX  
 - Standalone  
 - Musical  
 - Master / slave  
 DMX input and output  
 Power supply: AC 100/240V - 50/60Hz  
 Power consumption: 30 W  
 Dimensions: 166 x 180 x 110 mm  
 Net weight: 1.35 kg



**IP20**
**60W**
**18°**


## LED ROTOGOBO

60W gobos LED projector

Code : B04528



A powerful 60W white LED motif projector  
 Low gobo temperature: no need for expensive thermo-resistant glass or metal gobos!  
 Usable with plastic gobos created by a simple laser printer!  
 Metal and glass gobos are of course always usable.  
 Easy adjustment by rotary knobs on the back of the projector:  
 Rotation speed control of the gobo  
 Dimmer switch to adjust light intensity  
 Beam angle: 18°  
 Dimensions: 236 x 234 x 206 mm  
 Weight: 3.4 kg

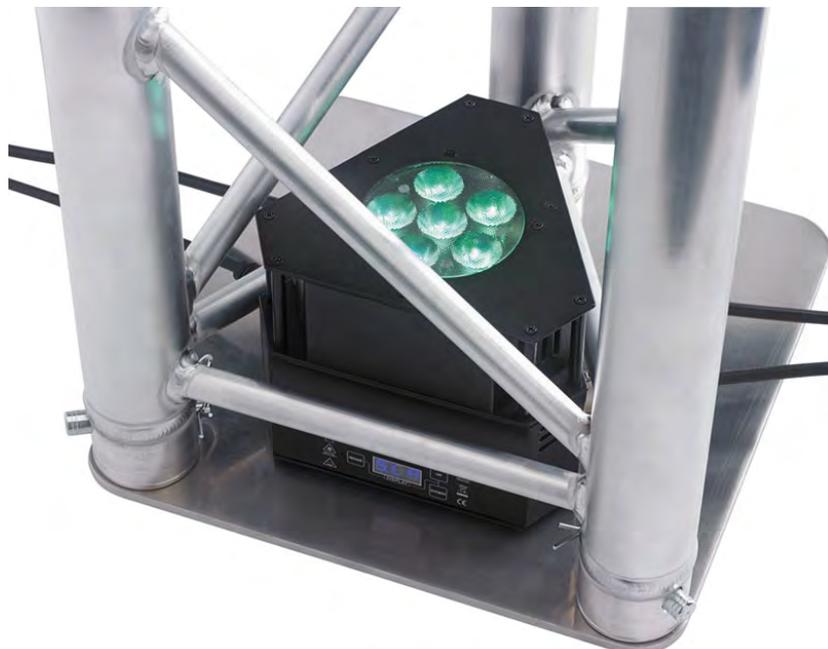

# BATTERY PROJECTORS



**IP65** **5x12W** RGBWAUV **25°**

**IPair5x12Six**  
IP65 AirDMX battery projector

Code : H10411



Optics: 5x12W RGBWAUV LEDs  
Opening angle: 25°  
AirDMX integrated transmitter / receiver  
Compatible with AirBox-ER1  
Integrated control unit with display with drop-down menu  
Infrared remote control  
DMX IN and OUT with 3-pin IP plugs  
POWER IN/OUT with 4-pin IP plugs  
Power supply: 100-240V/50-60Hz




**FLY-IPairx6**  
Flight case for 6 IPair5x12Six

Code : H10464



Power consumption: 65 W  
12-cell 22.2V 4.4Ah lithium battery  
Battery life: 6 hours in color changing mode - 4 hours in white [RGB]  
Waterproofing level: IP65  
Finish: cast aluminium painted black  
Dimensions: 240 x 165 x 280 mm  
Weight: 3.5 kg



<b>A</b>	H10465	FICIP-DMXm - DMX male waterproof plug for IPAir- IP68
<b>B</b>	H10466	FICIP-DMXF - DMX female waterproof plug for IPAir- IP68
<b>C</b>	H10467	FICIP-POWm - Male waterproof power plug for IPAir- IP68
<b>D</b>	H10468	FICIP-POWF - Female waterproof power plug for IPAir- IP68




**IP65** **6x10W** RGBWA **25°**

**BT-AKKULITE IP**  
Outdoor 6x10W RGBWA 5in1 LED projector + infrared remote control

Code : B05135



Optics: 6x10W RGBWA LEDs  
Opening angle: 22°  
Wireless transmitter / receiver compatible with protocol W-DMX G4  
Integrated control unit with display with drop-down menu  
Infrared remote control  
DMX IN / OUT with 3-pin XLR, POWER IN by Pro Con (Seetronic)  
Waterproofing level: IP65  
Power supply: 100-240V/50-60Hz Battery  
Power consumption: 60 W  
Dimensions: 180 x 150 x 198 mm  
Weight: 4.5 kg




**IP20** **6x10W** RGBWA **22°**

**ACCU COLOR-WHITE**  
Battery powered LED projector, built around 6 RGBWA (10W) LEDs

Code : B05126



Optics: 6x10W RGBWA LEDs  
Opening angle: 22°  
Wireless transmitter / receiver compatible with protocol W-DMX G4  
Integrated control unit with display with drop-down menu  
Infrared remote control  
DMX IN and OUT with 3-pin XLR, POWER IN/OUT with Powercon  
Power supply: 100-240V/50-60Hz Battery  
Power consumption: 60 W  
Finish: white delivered with a transparent plastic cover  
Dimensions: 167 x 138 x 185 mm  
Weight: 4.14 kg




**IP20** **6x10W** RGBWA **22°**

**ACCU COLOR-BLACK**  
Battery powered LED projector, built around 6 RGBWA (10W) LEDs

Code : B05128



Optics: 6x10W RGBWA LEDs  
Opening angle: 22°  
Wireless transmitter / receiver compatible with protocol W-DMX G4  
Integrated control unit with display with drop-down menu  
Infrared remote control  
DMX IN and OUT with 3-pin XLR, POWER IN/OUT with Powercon  
Power supply: 100-240V/50-60Hz Battery  
Power consumption: 60 W  
Finish: black delivered with a transparent plastic cover  
Dimensions: 167 x 138 x 185 mm  
Weight: 4.14 kg



# BATTERY PROJECTORS



**CASE-3**  
Flight case for 6x BT-AKKULITE IP / ACCUCOLOR

Code : B03274



**IP20** **15W** RGBW **30°**

**ACCU DECOLITE**  
A battery powered LED projector, built around RGB + White 15W LED, with embedded wireless DMX

Code : B05127



**IP65** **15W** RGBW **10°**

**ACCU DECOLITE IP**  
A battery powered IP65 LED projector, built around 15W RGB + White LED, with embedded wireless DMX

Code : B05136



**CASE FOR 4xACCU DECOLITE**  
Flight case for 4x Accu Decolite

Code : B03279



Optics: 1x15W RGBW LED  
Opening angle: 10 to 25°  
Wireless transmitter / receiver compatible with protocol W-DMX G4  
Integrated control unit with display with drop-down menu  
Infrared remote control  
Power supply: 100-240V/50-60Hz Battery  
Power consumption: 15 W  
Dimensions: 168 x 138 x 62 mm  
Weight: 1.61 kg

Optics: 1x15W RGBW LED  
Opening angle: 10°  
Wireless transmitter / receiver compatible with protocol W-DMX G4  
Integrated control unit with display with drop-down menu  
Infrared remote control  
Power supply: 100-240V/50-60Hz  
Power consumption: 15 W  
Dimensions: 172 x 138 x 185 mm  
Weight: 1.61 kg



**ACCU DECOLITE IP BALL 25CM**  
Acrylic ball 25cm for ACCU DECOLITE IP - outdoor

Code : B05140



**ACCU DECOLITE IP TUBE 50CM**  
50cm acrylic tube for Accu Decolite IP

Code : B05137



**100CM ACCU DECOLITE IP TUBE**  
100cm acrylic tube for Accu Decolite IP

Code : B05138



**150CM ACCU DECOLITE IP TUBE**  
150cm acrylic tube for Accu Decolite IP

Code : B05139



# SCENOGRAPHY PROJECTORS

---



- ✓250 W LED, warm white 3200K with high CRI-factor (→92) for natural colors.✓Extremely powerful LED theater spot with electronic 10° ~ 50° zoom.
- ✓Color frame for use of color filters and 8-leaf barndoor included
- ✓Four dimmer curves: linear, square, inverse square, S-curve
- ✓Flicker free TV-recordings thanks to 3.6kHz LED refresh rate!



WW 250W 3200K 10° 50°

### BT-THEATRE 250EZ

Powerful LED theatre projector with 10° - 50° electronic zoom

Code : B06016



Optics: 1x250W 3200K COB LED  
Opening zoom angle: 10° to 50°  
Brightness of 1500 to 7735 Lux at 4m  
Direct access to the dimmer and zoom  
Integrated control unit with LCD display with drop-down menu  
DMX IN/OUT with 3/5-pin XLR plugs  
POWER IN/OUT with powerCON plugs  
Power supply: 100-240V/50-60Hz  
Power consumption: 275 W  
heat sink and silent fan.  
Finish: Black  
Delivered with barndoor, filter frame  
Dimensions: 458 x 336 x 399 mm  
Weight: 8.9 kg



NEW WW 150W 3200K 10° 50°

### BT-THEATRE 150EZ

Very powerful 150 Watt LED theater spot with electronic 10°-50° zoom.

Code : B06020



10° - 50° zoom.  
150watt LED, warm white 3200K  
High CRI-factor (→97)  
Color frame for use of color filters and 8-leaf barndoor included  
Low noise cooling fan  
DMX-controlled: 6 different channel  
Flicker free  
Manual dimming & zoom/focus control:  
Four dimmer curves: linear, square, inverse square, S-curve  
RDM-functionality for easy remote setup  
3 & 5pin DMX in/outputs + Neutrik PowerCON in/outputs for easy daisy chaining.  
Weight: 6,2 kg



### BT-THEATRE YOKE

Pole operated yoke for easy manual positioning of theatre projectors in TV-studios and theatres.

Code : B06021



Replaces the standard bracket on BT-THEATRE 150EZ / 250EZ (eventual other projectors: see website)



### TV-SPIGOT RECEIVER

easily connect to a standard clamp to equipment with 28mm TV-SPIGOT.

Code : B06603



This special adapter makes it possible to easily connect a standard clamp to equipment with 28mm TV-SPIGOT  
Perfect to fix our BT-THEATRE YOKE (code: B06021) to a standard clamp like our:  
FAST CLAMP V2 (code: B02684)  
ULTRA CLAMP (code: B06600)  
Metal: AL6061-T6  
SWL: 100kg  
Color: black



R A L B 250W 3200K 15° 50°

### BT-THEATRE HD COLOR1

Theater spot 250W RGBAL + Hi-CRI white

Code : B06018



Mains Input: AC 100 - 240V, 50/60Hz  
Power consumption: 240 Watts  
Power connections: PowerCon input + PowerCon output  
DMX connections: 3&5 pin-XLR male / female inputs + outputs  
DMX modes: 4 modes (8CH + 10CH + 13CH + 19CH)  
Lamp: LED, 200W RGBAL (Red, Green, Blue, Amber, Lime)  
White color presets: 1800K 8000K  
CRI color rendering: →90 (2700K - 4500K) - →85 (5600K - 8000K)  
Beam Angle: electronic zoom 14° - 55°  
IP-Rating: IP20  
Cooling: heat pipe + forced low speed fan cooling  
Weight: 7.6 kg



### BT-THEATRE BARN2

Barndoor for BT-THEATRE HD1

Code : B06019



### PROJECTOR CASE 4

Case for 4xBT-Theatre 250EZ & 100 EC Mk2.

Code : B03285



# SCENOGRAPHY PROJECTORS



WW 100W 3200K 10° 50°

## BT-THEATRE 100EC Mk2

LED with 10° to 50° manual zoom

Code : B06008



Optics: 1x100W 3200K COB LED  
manual zoom: 10° to 50°  
7800 lux @ 2m (beam angle: 10°)  
Integrated control unit with LCD display with drop-down menu  
DMX IN/OUT with 3/5-pin XLR plugs  
POWER IN/OUT with powerCON plugs  
Power supply: 100-240V/50-60Hz  
Power consumption: 125 W  
Silent fan (31dB@1m)  
Finish: Black  
Delivered with barndoor, filter frame  
Dimensions: 2788 x 305 x 336 mm  
Weight: 6.2 kg



## BARNDOOR FOR THEATERSPOT 1000

Barndoor for BT-THEATRE 100EC

Code : B02000



## SFX-PC20dimWb

Proj. 20W LED CP Warm White + Amber - Black

Code : H10900



Optical  
1 x 20W warm white + amber LED  
Colour temperature: 3000°K  
CRI 92  
Light output of 600 Lux at 3m (39° opening)  
Beam angle of 39° or 51°  
Functions  
Electronic dimmer  
Power block or dimmer control possible  
Connectors  
POWER IN via 2P+E socket  
Additional information  
Power supply: 100-240V/50-60Hz  
Power consumption: 20 W  
Cooling system: convection-cooled, without forced ventilation  
Finish: Black or white die-cast aluminium body  
Dimensions: 186 x 141 x 211 mm  
Weight : 2 kg



## SFX-PC20dimWw

Proj. 20W LED CP Warm White + Amber-White

Code : H10902



Optical  
1 x 20W warm white + amber LED  
Colour temperature: 3000°K  
CRI 92  
Light output of 600 Lux at 3m (39° opening)  
Beam angle of 39° or 51°  
Functions  
Electronic dimmer  
Power block or dimmer control possible  
Connectors  
POWER IN via 2P+E socket  
Additional information  
Power supply: 100-240V/50-60Hz  
Power consumption: 20 W  
Cooling system: convection-cooled, without forced ventilation  
Finish: Black or white die-cast aluminium body  
Dimensions: 186 x 141 x 211 mm  
Weight : 2 kg



R G B 60W RGBW 10° 50°

## BT-THEATRE 60FC

60W RGBW COB LED with 10° - 50° manual zoom.

Code : B06015



Optics: 1x 60W RGBW COB LED  
manual zoom: 10° to 50°  
330 lux at 5m and 10°, 77 lux at 5m and 40°  
Integrated control unit with LCD display with drop-down menu  
DMX IN/OUT with 3-pin XLR plugs  
POWER IN with 1 m cord with plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 62 W  
Dissipation fan  
Finish: black  
Delivered with barndoor filter frame  
Dimensions: 241 x 196 x 173 mm  
Weight: 3.6 kg



WW 50W 3200K 10° 50°

## BT-THEATRE 50WW

LED with 10° - 50° manual zoom. 50W warm white LED

Code : B06013



Optics: 1x50W 3200K COB LED  
manual zoom: 10° to 50°  
330 lux at 5m and 10°, 77 lux at 5m and 40°  
Integrated control unit with LCD display with drop-down menu  
DMX IN/OUT with 3-pin XLR plugs  
POWER IN with 1 m cord with plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 55 W  
Dissipation fan  
Finish: black  
Delivered with barndoor filter frame  
Dimensions: 241 x 196 x 173 mm  
Weight: 3.6 kg



WW 50W 3200K 10° 50°

## BT-THEATRE 50WW

10° - 50° manual zoom LED. 50W warm white LED

Code : B06014



Optics: 1x50W 3200K COB LED  
manual zoom: 10° to 50°  
330 lux at 5m and 10°, 77 lux at 5m and 40°  
Integrated control unit with LCD display with drop-down menu  
DMX IN/OUT with 3-pin XLR plugs  
POWER IN with 1 m cord with plug  
Power supply: 100-240V/50-60Hz  
Power consumption: 55 W  
Dissipation fan  
Finish: white  
Delivered with barndoor filter frame  
Dimensions: 241 x 196 x 173 mm  
Weight: 3.6 kg



## PROJECTOR CASE 5

Flight case for 6 x BT-Theatre 50WW-60FC

Code : B03276





**NEW**



**WW 40W 3200K**

**BT-PROFILE COMPACT 3200K**  
LED profile spot with 40W WW 3200K

Code : B06022



**NEW**



**WW 250W 3200K**

**BT-PROFILE250/LEDENGINE**  
160W COB LED cutout

Code : B06023



Compact profile spot, the perfect choice for museums, art-galleries, stores, etc. 40W warm white LED for an excellent light output (used @ 70%: long lifespan) The projector can be dimmed using triac dimmers with an LED mode. Compatible power supplies: dsp2-led & dsp4-mk2  
Color temperature = 3200K, CRI →90  
Zoom lens with a beam angle of 19° to 36° (included)  
With the 4 blade shutter you can give any desired shape to the beam.  
Rugged black die-cast aluminum construction  
Gobo Holder included (gobo size: 38mm, image 25mm)  
Filter holder included  
Safety Cable included

250W high power COB LED  
Color temperature of 3200K.  
Extremely quiet cooling system using heat pipe technology.  
Compatible with ETC® Source Four optics.  
Modes: manual, DMX  
Different gradation curves  
CRI: 97

### Optics compatible with BT-PROFILE250/LEDENGINE

B06024	BT-PROFILE250/OPTIC 19DEG	19°
B06025	BT-PROFILE250/OPTIC 26DEG	26°
B06026	BT-PROFILE250/OPTIC 36DEG	36°
B06027	BT-PROFILE250/OPTIC 50DEG	50°
B06001	BT-PROFILE160/OPTIC 15-30	15° à 30°
B06002	BT-PROFILE160/OPTIC 25-50	25° à 50°



BT-PROFILE160/OPTIC 15-30



**BT-PROFILE160/GOBO HOLDER**  
GOBO door for BT-PROFILE160/OPTIC

Code : B06003



GOBO holder for BT-PROFILE160/OPTIC  
Outer diameter of the gobos: 86mm,  
Optical diameter: 64.5mm



**BT-PROFILE160/IRIS**  
Iris for BT-PROFILE160/OPTIC

Code : B06004



Iris for BT-PROFILE160/OPTIC  
Opening diameter: adjustable from 5 to 74 mm



# FLAT PROJECTORS







**irLDFLAT**  
**12x12SIXb**  
 12x12W six-colour LEDs

---

Code : H10143

---

**Contest** 

12x12W six-colour RGBWA + UV LEDs  
 Beam opening: 40°  
 Light intensity: 1400 Lux at 3 m  
 Infrared remote control  
 Digital display with drop-down menu  
 Input and output on IEC plugs  
 Modes of operation:  
 2-9 channel DMX, fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave Mode, Editing and playback of a 20-step program  
 Power consumption: 160 W  
 Power supply: AC 100/240V - 50/60Hz  
 DMX input and output  
 Dimensions: 275 x 310 x 110 mm  
 Net weight: 3.4 kg


**FLY8-irLEDFLAT**  
 Flight case for 8x FLAT12SIX

---

Code : H10739

---

**Contest** 

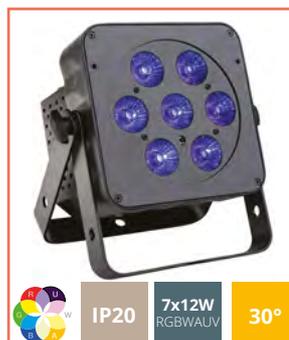





**LED PLANO 6in1**  
 7x12W RGBWA + UV LEDs


---

Code : B04961

---

**JBSYSTEMS**

7x12W six-colour RGBWA + UV LEDs  
 Beam opening: 30°  
 Infrared remote control  
 Ready for a DMX wireless connection with the WTR-DMX option  
 Digital display with drop-down menu  
 Input and output on IEC plugs  
 Modes of operation:  
 Standalone, Master/slave mode, DMX mode, usable with LEDCON-XL controller  
 DMX input and output  
 Power consumption: 50 W  
 Power supply: AC 100/240V - 50/60Hz  
 Dimensions: 210 x 130 x 230 mm  
 Net weight: 2.83 kg

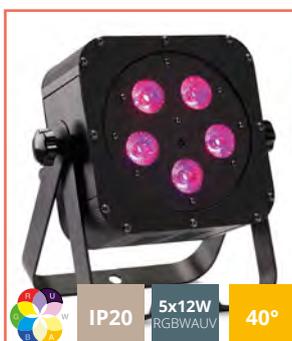





**irLEDFLAT-5x12SIXb**  
 Compact projector with six-colour LEDs, 5x12W LEDs

---

Code : H10142

---

**Contest** 

5x12W six-colour RGBWA + UV LEDs  
 Beam opening: 40°  
 Light intensity: 580 Lux at 3 m  
 Infrared remote control  
 Digital display with drop-down menu  
 Input and output on IEC plugs  
 Modes of operation:  
 2-9 channel DMX, fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave Mode, Editing and playback of a 20-step program  
 Power consumption: 80 W  
 Power supply: AC 100/240V - 50/60Hz  
 DMX input and output  
 Dimensions: 240 x 265 x 110 mm  
 Net weight: 2.8 kg



**LIGHT EFFECT CASE 1**  
 Solid flight case for the transport of light effects.


---

Code : B03216

---

**JVCase**

Solid flight case for transport  
 Divided into 5 compartments:  
 2x compartments (465x285x260mm)  
 1x compartment (190x69x260mm)  
 1x compartment (150x69x260mm)  
 1x compartment (95x69x260mm)

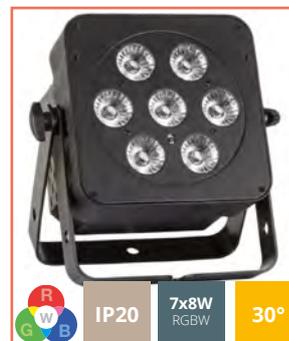





**LED PLANO 7FC-BLACK**  
 7x8W RGBW LEDs

---

Code : B04958

---

**JBSYSTEMS**

7x8W RGBW LEDs  
 Beam opening: 30°  
 Infrared remote control  
 Ready for a DMX wireless connection with the WTR-DMX option  
 Digital display with drop-down menu  
 Input and output on IEC plugs  
 Modes of operation:  
 Standalone, Master/slave mode, DMX mode, usable with LEDCON-02 or LEDCON-XL controllers  
 DMX input and output  
 Finish: black  
 Power consumption: 38 W  
 Power supply: AC 100/240V - 50/60Hz  
 Dimensions: 210 x 120 x 220 mm  
 Net weight: 2.35 kg

# FLAT PROJECTORS






**LED PLANO 7FC-WHITE**  
7x8W RGBW LEDs

Code : B04959



7x8W RGBW LEDs  
Beam opening: 30°  
Infrared remote control  
Ready for a DMX wireless connection with the WTR-DMX option  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
Standalone, Master/slave mode, DMX mode, usable with LEDCON-02 or LEDCON-XL controllers  
DMX input and output  
Finish: white  
Power consumption: 38 W  
Power supply: AC 100/240V - 50/60Hz  
Dimensions: 210 x 120 x 220 mm  
Net weight: 2.35 kg





**RAVE SPOT**  
3 effects in a single device. Wireless DMX

Code : B06201



3 effects in a single device!  
9 x4W RGB UV LEDs  
1 central 30W RGB COB LED.  
Strobe LED: 21x0.5 W white LEDs.  
Infrared remote control  
Ready for a DMX wireless connection with the WTR-DMX option  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation: Standalone, Master/slave mode, 1-22 channel DMX mode  
DMX input and output  
Power consumption: 78 W  
Power supply: AC 100/240V - 50/60Hz  
Dimensions: 280 x 275 x 76 mm  
Net weight: 1.81 kg





**PARTY SPOT**  
7x8W RGBW compact LEDs

Code : B04189



7x8W RGBW LEDs  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
Standalone, Master/slave mode, DMX mode, usable with LEDCON-02 or LEDCON-XL controllers  
DMX input and output  
Power consumption: 38 W  
Power supply: AC 100/240V - 50/60Hz  
Dimensions: 190 x 190 x 140 mm  
Net weight: 1.48 kg





**COB SLIM100-RGB**  
Energy efficient compact COB LED projector!

Code : B04415



1x100W RGB COB LED  
Beam opening: 15° or 70°  
Light intensity: 1165 Lux at 3 m at 15°  
Ready for a DMX wireless connection with the WTR-DMX option  
Infrared remote control  
Digital display with drop-down menu  
Mains input/output on Powercon plugs  
Modes of operation:  
Standalone, Master/slave, DMX mode, usable with LEDCON-02 MK2 or LEDCON-XL controllers  
Power consumption: 120 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Dimensions: 245 x 280 x 140 mm  
Net weight: 3.46 kg





**COB-PLANO**  
36W RGB COB, 100°+15°

Code : B04951



1x36W RGB COB LED  
Beam opening: 15° or 100°  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
Standalone, Master/slave, DMX mode, usable with LEDCON-02 MK2 controllers or LEDCON-XL controllers  
Power consumption: 40 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Dimensions: 202 x 120 x 224 mm  
Net weight: 2.14 kg



**CASE for 4x COB-PLANO**  
4x COB-PLANO + 1x LEDCON-02 MK2

Code : B03252



Lightweight and compact case designed for  
4x COB-PLANO + LEDCON-02 MK2  
External dimensions: 550 x 315 x 250 mm



# PAR PROJECTORS






**4x36W**  
COB RGB

**15°**  
**100°**

**COB-4BAR**  
4xCOB RGB 36W + IR + Flight case

Code : B04952




**COB-4BAR FOOT-CONTROL**  
Pedal assembly for COB-4BAR

Code : B04953




**CASE for COB-4BAR**  
Lightweight and compact case, specially designed to carry a COB-4BAR

Code : B03249



4x1 36W RGB COB LED  
 Beam opening: 15° or 100°  
 Infrared remote control  
 Ready for a DMX wireless connection with the WTR-DMX option  
 Digital display with drop-down menu  
 Input and output on IEC plugs  
 Modes of operation:  
 Standalone, Master/slave, DMX mode, usable with LEDCON-02 MK2 LEDCON-XL, COB-4BAR FOOTCONTROL controllers  
 Power consumption: 120 W  
 Power supply: AC 100/240V - 50/60Hz  
 DMX input and output  
 Dimensions: 1000 x 82 x 320mm  
 Net weight: 11 kg

Lightweight and compact case, specially designed to carry a COB-4BAR  
 External dimensions: 105 x 34 x 16 cm





**IP20**  
14x5W  
RGBW

**14°**

**STAGE BEAMER FC - INDOOR**  
LED proj. 14x5W RGBW 14°

Code : B05504







**12x12W**  
RGBWUV

**15°**

**BT-STAGEPAR 6in1**  
12x12W RGBWA projector + UV - 15°

Code : B04377



Optics: 14x5W RGBW LEDs  
 Opening angle: 14°  
 Integrated control unit with display with drop-down menu  
 DMX IN / OUT with 3- and 5-pin XLR plugs  
 POWER IN/OUT with Powercon plugs  
 Power supply: 100-240V/50-60Hz  
 Power consumption: 65W  
 Natural convection cooling  
 Finish: cast aluminium painted black  
 Dimensions: 245 x 205 x 245 mm  
 Weight: 4.96 kg

12x12W six-colour RGBWA + UV LEDs  
 Beam opening: 25°  
 Digital display with drop-down menu  
 Mains output on IEC plugs  
 Modes of operation:  
 1-9 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
 Mode: Halogen lamp or Diode  
 White balance  
 Remote setup: RDM  
 Power supply: AC 100/240V - 50/60Hz  
 DMX input and output  
 finish: black  
 Dimensions: 300 x 275 x 300 mm  
 Net weight: 3.5 kg



# PAR PROJECTORS



18x12W  
RGBWAUV 40°

**irLED64-18x12SIXsb**  
PAR64 with RGBWAUV LEDs - With infrared remote control

Code : H10138



18x12W six-colour RGBWA + UV LEDs  
Beam opening: 40°  
Light intensity: 3350 Lux at 3 m  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
2-9 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave Mode, Editing and playback of a 20-step program  
Power consumption: 240 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Black aluminium housing  
Dimensions: 340 x 270 x 220 mm  
Net weight: 5.4 kg




18x12W  
RGBWAUV 40°

**irLED64-18x12SIXss**  
PAR64 with RGBWAUV LEDs - With infrared remote control - Aluminium

Code : H10137



18x12W six-colour RGBWA + UV LEDs  
Beam opening: 40°  
Light intensity: 3350 Lux at 3 m  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
2-9 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave Mode, Editing and playback of a 20-step program  
Power consumption: 240 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Silver aluminium housing  
Dimensions: 340 x 270 x 220 mm  
Net weight: 5.4 kg

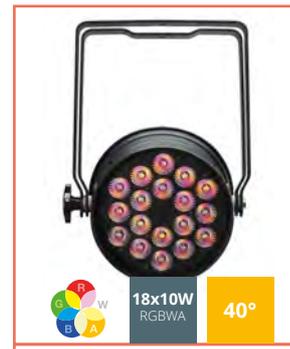

18x10W  
RGBWA 40°

**irLED64-18x10FIVEsb**  
PAR64 with 18x10W 5-colour LEDs Black finish

Code : H10072



18x10W RGB White + Amber LEDs  
Beam opening: 40°  
Light intensity: 2150 Lux at 3 m  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
2-8 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode, Editing and playback of a 20-step program  
Power consumption: 165 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Black aluminium housing  
Dimensions: 340 x 270 x 220 mm  
Net weight: 4.6 kg



18x3W  
RGB 40°

**irLED64-18x3TCsb**  
PAR64 with 18x3W TRI LEDs Black finish

Code : H9876



18x3W RGB LEDs  
Beam opening: 40°  
Light intensity: 1150 Lux at 3 m  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
2-6 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
Power consumption: 60 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Black aluminium housing  
Dimensions: 340 x 270 x 220 mm  
Net weight: 4.3 kg




18x3W  
RGB 40°

**irLED64-18x3TCss**  
PAR64 with 18x3W TRI LEDs Aluminium finish

Code : H9875



18x3W RGB LEDs  
Beam opening: 40°  
Light intensity: 1150 Lux at 3 m  
Infrared remote control  
Digital display with drop-down menu  
Input and output on IEC plugs  
Modes of operation:  
2-6 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
Power consumption: 60 W  
Power supply: AC 100/240V - 50/60Hz  
DMX input and output  
Silver aluminium housing  
Dimensions: 340 x 270 x 220 mm  
Net weight: 4.3 kg

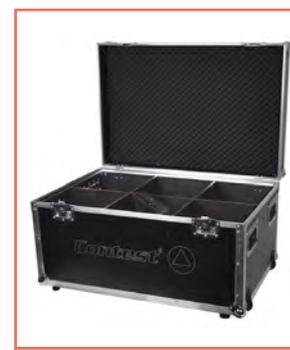

**FLY-irLED64x6**  
Flight case for 6 PAR64

Code : H10338



External dimensions - L x W x H:  
850 x 580 x 585 mm  
Compartment dimensions:  
260 x 260 mm Depth: 440 mm  
Hood thickness: 65 mm



# PAR PROJECTORS




WW 100W 3200K 60°

**COB PAR56-100WW Black**  
LED projector with parabolic reflector

Code : B04411



Optics: 1x100W 3200K COB LED  
Opening angle: 60°  
Digital display with drop-down menu  
Mains output on IEC plugs  
Modes of operation:  
1-2 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
Mode: Halogen lamp or Diode  
Power supply: 100-240V/50-60Hz  
DMX input and output  
Finish: black  
Delivered with 25° lens, filter door  
Dimensions: 417 x 286 x 260 mm  
Weight: 2.8 kg




WW 100W 3200K 60°

**COB PAR56-100WW Silver**  
LED projector with parabolic reflector

Code : B04410



Optics: 1x100W 3200K COB LED  
Opening angle: 60°  
Digital display with drop-down menu  
Mains output on IEC plugs  
Modes of operation:  
1-2 channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
Mode: Halogen lamp or Diode  
Power supply: 100-240V/50-60Hz  
DMX input and output  
Finish: silver  
Delivered with 25° lens, filter door  
Dimensions: 417 x 286 x 260 mm  
Weight: 2.8 kg

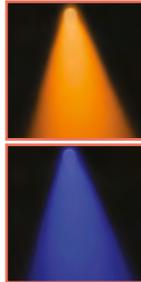
R G B 100W COB RGB 50°

**COB PAR56-RGB**  
100W RGB COB LED

Code : B04403



Optics: 1x100W RGB COB LED  
Opening angle: 50°  
Digital display with drop-down menu  
Mains output on IEC plugs  
Modes of operation:  
3-, 4- and 5-channel DMX, Fixed colours, Step or Fade programs, Auto mode with sound sensitivity, Slave mode,  
Power supply: 100-240V/50-60Hz  
DMX input and output  
Finish: black  
Delivered with 25° lens, filter door  
Dimensions: 417 x 286 x 260 mm  
Weight: 2.8 kg



**COB BARNDOOR/Black**  
Barndoor for COB PAR56

Code : B04413




**COB BARNDOOR/Silver**  
Barndoor for COB PAR56

Code : B04414




**PROJECTOR CASE**  
Flight case for carrying 4 projectors

Code : B03253



For:  
BRITEQ COB-PAR  
BRITEQ BT-Stagepar 6in1  
BRITEQ BT-Theatre 1EZ  
BRITEQ BT-Theatre 100EC

# PAR PROJECTORS






**15W**  
RGBW

**10°**

**RETRO-PAR20 RGBW**  
15W RGBW RETRO-PAR20 LED IR Remote Control

---

Code : B05129

---



RETRO-PAR20 LED projector  
1x15W RVBW LED.  
Opening: 10°  
Infrared remote control IR-3  
16 fixed colours (with dimming).  
"Fade", "soft transition" and "flash"  
colour interlacing (with speed control).  
Strobe function (with speed control).  
Easy to use sound control mode.  
Power supply: 100-240V/50-60Hz  
finish: black  
Dimensions: 198 x 112 x 100 mm  
Weight: 0.65 kg





**15W**  
RGBW

**4°**

**BEAMSPOT1-DMX FC**  
15W RGBW projector, equipped with a very narrow 4° lens

---

Code : B04957

---



1x15W RGBW LED  
Openings: 4° | 10° | 45°  
Power consumption: 17 W  
Power supply: AC100V-240V. 60Hz-50Hz  
Powercon IN/OUT  
DMX 3-pin IN/OUT  
DMX control: 4-7 channels  
Dimensions: 125 x 196 x 172 mm  
Net weight: 1.23 kgs



**WW**

**15W**

**4°**

**BEAMSPOT1-DMX WW**  
15W WARM WHITE 4° lens

---

Code : B04960

---



1x15W warm white 3200K LED  
Openings: 4° | 10° | 45°  
Power consumption: 17 W  
Power supply: AC100V-240V. 60Hz-50Hz  
Powercon IN/OUT  
DMX 3-pin IN/OUT  
DMX control: 1-2 channels  
Dimensions: 125 x 196 x 172 mm  
Net weight: 1.23 kgs




**NW**

**15W**

**4°**

**BEAMSPOT1-TRIAC NW**  
15W WHITE projector

---

Code : B04955

---



1x15W natural white 4500K LED  
Openings: 4° | 10° | 45°  
NO DMX: can be controlled using a  
traditional triac dimmer / triac light  
modulator or the dimmer located on the  
rear panel.  
Power consumption: 17 W  
Power supply: AC100V-240V. 60Hz-50Hz  
Fixed power cord with standard power  
outlet  
Dimensions: 125 x 196 x 172 mm  
Net weight: 1.23 kgs



**WW**

**15W**

**4°**

**BEAMSPOT1-TRIAC WW**  
This 15W PINSPOt

---

Code : B04954

---



1x15W warm white 3200K LED  
Openings: 4° | 10° | 45°  
NO DMX: can be controlled using a  
traditional triac dimmer / triac light  
modulator or the dimmer located on the  
rear panel.  
Power consumption: 17 W  
Power supply: AC100V-240V. 60Hz-50Hz  
Fixed power cord with standard power  
outlet  
Dimensions: 125 x 196 x 172 mm  
Net weight: 1.23 kgs



# TRADITIONAL PAR PROJECTORS



**PAR46-BARN/black**  
Barndoor for PAR46

Code : B02079



**PAR46-BARN/silver**  
Barndoor for PAR46

Code : B02080



**PINSPOT/Black**  
Projector for PAR36 lamp

Code : B02034



**PAR30/black**  
Projector for PAR30 or PAR20 lamp

Code : B02088



Projector for 30W/6V PAR 36 lamp  
Equipped with a transformer, fuse holder and clips to fix the lamp  
Finish: black  
Without lamp

Projector for Par 30 or Par 20 lamp  
Compatible with halogen lamps and E27 socket LED lamps  
Power supply 230V AC  
Finish: black  
Total length without holder: 22 cm  
Without lamp



**PAR30/silver**  
Projector for PAR30 or PAR20 lamp

Code : B02087



**PAR30-BARN/black**  
Barndoor for PAR30

Code : B02077



**PAR30-BARN/silver**  
Barndoor for PAR30

Code : B02078



Projector for Par 30 or Par 20 lamp  
Compatible with halogen lamps and E27 socket LED lamps  
Power supply 230V AC  
Finish: silver  
Total length without holder: 22 cm  
Without lamp

# TRADITIONAL PAR PROJECTORS



**PAR20/black**  
Projector for PAR20 lamp

Code : B02086



Projector for PAR20 lamp  
Finish: black  
Total length without holder: 17cm  
Without lamp



**PAR20/silver**  
Projector for PAR20 lamp

Code : B02085



Projector for PAR20 lamp  
Finish: silver  
Total length without holder: 17cm  
Without lamp



**PAR20-BARN/black**  
Barndoor for PAR20

Code : B02075



**PAR20-BARN/silver**  
Barndoor for PAR20

Code : B02076



**PAR16/black GU10 socket**  
Projector for PAR16 lamp

Code : B02061



GU10 socket for the use of: LED lamps  
(GU10) Halogen lamp (35W or 50W/230V)  
Finish: black  
No transformer necessary  
Total length without holder: 14,5cm  
Without lamp



**PAR16/Silver GU10 socket**  
Projector for PAR16 lamp

Code : B02055



GU10 socket for the use of: LED lamps  
(GU10) Halogen lamp (35W or 50W/230V)  
Finish: silver  
No transformer necessary  
Total length without holder: 14,5cm  
Without lamp



**PAR16-BARN/black**  
Barndoor for PAR16

Code : B02073



**PAR16-BARN/silver**  
Barndoor for PAR16

Code : B02074



# BLINDERS & PROJECTORS

---

## BT-NONABEAM

Exclusive effect for  
the show



- ✓ Design created by service providers for service providers
- ✓ Light power in a compact format
- ✓ Rendering that surpasses traditional lamps
- ✓ The Glow effect for smooth transitions

# BLINDERS & PROJECTORS



**BT-NONABEAM - BQ1 (FRANCE BE CH)**  
9x60W WW/CW

Code : B05513



**BT-NONABEAM - BQ2 (EXPORT)**  
9x60W WW/CW beam/ RGB

Code : B05521



**CASE FOR 4xBT-NONABEAM**  
Flight case pour 4 x BT-Nonabeam

Code : B03284



**BT-NONABEAM set 9 louvers GOLD**

Code : B05514



Mains supply input: 100 to 240 V AC, 50/60 Hz  
Electrical connections: Neutrik® PowerCON TRUE1  
Power consumption (full speed): 730 W  
Power factor: 0.95  
Protection class: 1  
Protection class: IP20  
Fuse: 250 V 6 A thermal fuse  
DMX connections: 3 and 5 pin XLR and male/female XLR connections  
Number of DMX channels used: 13 + 29 + 45 channels  
Beam lamps: 9 x LED WHITE, 60 W (30W 3000K / IRC: 91 + 30W 6000K)  
Lamps for glow effect: 72 x RGB LED 1 W  
LED refresh rate: 1.2 kHz  
Beam angle: 4° to 4.5°  
Ambient temperature: 40 ° C  
Dimensions (W x H x D): 580 x 223 x 142 mm  
Weight: 15 kg (16 kg with hook)

Mains supply input: 100 to 240 V AC, 50/60 Hz  
Electrical connections: Neutrik® PowerCON TRUE1  
Power consumption (full speed): 730 W  
Power factor: 0.95  
Protection class: 1  
Protection class: IP20  
Fuse: 250 V 6 A thermal fuse  
DMX connections: 3 and 5 pin XLR and male/female XLR connections  
Number of DMX channels used: 13 + 29 + 45 channels  
Beam lamps: 9 x LED WHITE, 60 W (30W 3000K / IRC: 91 + 30W 6000K)  
Lamps for glow effect: 72 x RGB LED 1 W  
LED refresh rate: 1.2 kHz  
Beam angle: 4° to 4.5°  
Ambient temperature: 40 ° C  
Dimensions (W x H x D): 580 x 223 x 142 mm  
Weight: 15 kg (16 kg with hook)



# BLINDERS & PROJECTORS



**Powerpixel4-RGB**  
Bar with 4 30W TRI COB LEDs  
With LCD display

Code : B04400



4 COB LEDs  
30W tri-colour LEDs  
Beam opening: 60°  
DMX 3- and 5-pin XLR input and output  
Power input and output on PowerCON®  
(maximum 20 projectors connected to each other)  
Power consumption: 120 W  
Power supply: AC 100/240V - 50/60Hz  
Cooling by temperature regulated ventilation  
Dimensions: 440 x 150 x 180 mm  
Net weight: 5 Kg



**Powerpixel8-RGB**  
Bar with 8 30W TRI COB LEDs  
With LCD display

Code : B04401



8 COB LEDs  
30W tri-colour LEDs  
Beam opening: 60°  
DMX 3- and 5-pin XLR input and output  
Power input and output on PowerCON®  
(maximum 10 projectors connected to each other)  
Power consumption: 240 W  
Power supply: AC 100/240V - 50/60Hz  
Cooling by temperature regulated ventilation  
Dimensions: 880 x 60 x 170 mm  
Net weight: 8 Kg



**PROJECTOR CASE 2**  
Flight case for POWERPIXEL8-RGB,  
POWERPIXEL4-RGB, BEAMBAR10-RGBW,  
BEAMBAR5-RGBW

Code : B03257



**BT-BLINDER2 IP**

Ready for everything  
and in any weather  
conditions.

- ✓ Robustness and Weather-Resistant
- ✓ Red-Shift effect
- ✓ Professional "line array" rigging



**BT-BLINDER2 IP**

Code : B05520



Mains power input: 100 to 240 V AC, 50/60 Hz Internal fuse: 250 V AC/T2A  
Electrical connections: Neutrik® PowerCON TRUE1 (input/output)  
Power consumption (full power): 310 W  
Power factor: → 0.95  
Series connection: 5 units (at 240 V AC)  
Protection class: 1  
Protection class: IP65 - outdoor use  
DMX connections: 5-pin male/female XLR (modification kit to 3-pin XLR available)  
Number of DMX channels used: 4 + 6 + 10 channels  
LED : 2 of 135 W (warm white and yellow) Color temperature (CCT) : 1 650 K 3 000 K  
(AMBER EFFECT effect)  
IRC factor: → 97  
LED refresh rate: 3.6 kHz  
Strobe frequency: 0.5 30 Hz  
Ambient temperature: 40 °C  
Weight: 8.1 kg (8.8 kg with set of fixing elements)



**BT-BLINDER2 IP  
RIGGING SET**  
Rigging set for BT-BLINDER2 IP

Code : B05522



**CASE FOR  
3x BT-BLINDER2 IP**  
Flightcase for 3 x BT-BLINDER2 IP

Code : B03290



# BLINDERS & PROJECTORS



**COB Blinder 2x100W**  
LED BLINDER equipped with two white 100Watt LED projectors

Code : B04402



**BEAM MATRIX5x5-RGBW**  
5x5 MATRIX effect, 25x 15W RGBW 4.5°beams + Artnet

Code : B04416



**MATRIX5x5-CASE**  
Flight case for 6x MATRIX5x5

Code : B04422



LED BLINDER equipped with two white 100Watt 3200k LED projectors  
Opening angle: 60°  
The two projectors can be controlled independently  
DMX mode: 1, 2 or 4 channels  
Static mode: Stroboscopic effect dimmer Master/Slave Mode, Variable stroboscopic effect  
Halogen (slow) or LED (fast) mode  
Dimming 16 bit from 0% to 100%  
DMX IN/OUT on XLR 3/5-pin plug  
POWER IN/OUT with Powercon  
Power: AC 100 - 240V, 50/60Hz  
Power consumption: 235W  
Dimensions: 440 x 144 x 355 mm  
Weight: 4.46 kg

25 15W RGBW LEDs 5x5 Matrix  
Lens opening: 4.5°  
DMX mode: 4-150 channels  
Ethernet input/output: Art-Net support  
Internal programs in standalone mode or via DMX, Master/slave mode, static or fade colours, static or sound-triggered chasers.  
Halogen (slow) or LED (fast) mode  
Balancing of individual whites by Pixel  
Four intensity variation curves  
DMX IN/OUT on XLR 3/5-pin plug  
POWER IN/OUT with Powercon  
Power: AC 100 - 240V, 50/60Hz  
Power consumption: 415W  
Dimensions: 550 x 550 x 120 mm  
Weight: 18 kg



# FLOOD PROJECTORS



## BT-RETRO

A retro look for a modern scenography  
The compact version of the BT-VINTAGE  
with the same light quality and Glow  
effects.

The design of the projector allows them  
to be mechanically combined to form sets  
according to your needs

The BT-RETRO has an integrated DMX  
control to adjust the drive and RGB effects.  
It is prepared for television studios with a  
flicker-free LED refresh rate.



### BT-RETRO

Vintage RGB projector

Code : B05518



### BT-RETRO coupling adapter

Adapter for BT-RETRO

Code : B05519



### CASE FOR 2xBT-RETRO

Flightcase for 2 x BT-RETRO

Code : B03289



Mains power input: 100 to 240 V AC,  
50/60 Hz  
Halogen lamp (mains input 110 V AC):  
G9.5 - HPL-575W 120 V  
Halogen lamp (mains input 230 V AC):  
G9.5 - HPL-575W 240 V  
Maximum power consumption: 480 W  
(halogen (limited to 320 W) + LED (120  
W) fully lit)  
Fuse: 250 V T 6.3A (20 mm glass)  
DMX connections: 3 and 5-pin male/  
female XLR XLR connections  
Number of DMX channels used: 3  
modes (5 + 6 + 7 channels)  
RGB LED: 48 RGB units 3.5 W  
LED refresh rate: 1,200 Hz  
Weight: 8.66 kg  
Lamp not supplied



### HPL 575-X LL (code B02171)

230V halogen lamp for  
BT-RETRO. For a warm and  
pleasant light

# FLOOD PROJECTORS

This attractive retro-style projector is perfect for many applications.

The combination of its golden reflector and an HPL-575 lamp creates a warm and pleasant light. The high-power RGB LEDs can illuminate the reflector to produce incredible additional effects.

The BT-VINTAGE has an integrated DMX control to adjust the dimmer and RGB effects. It is prepared for TV studios with a flicker-free LED refresh rate.



**BT-VINTAGE**  
Retro-style projector with golden reflector, HPL-575 lamp and RGB LEDs to produce incredible warm colour effects.

Code : B04547



**CASE for 2x BT-VINTAGE**  
Flight case for 2x BT-VINTAGE

Code : B03271



**HPL 575-X LL**  
(code B02171)

230V halogen lamp for BT-VINTAGE. For a warm and pleasant light



RGB LEDs (156 x 1W RVB)  
Wireless DMX: USB port for WTR-DMX dongle (optional)  
PowerCON input and output  
XLR 3/5-pin input and output  
Power supply: AC 100/240V - 50/60Hz  
Power consumption: 980W  
Ventilation: natural convection  
Dimensions: 696 x 650 x 370 mm  
Net weight: 14 Kg  
Lamp not supplied






# EFFECT PROJECTORS

The BT-LEDROTOR is a 70x70cm high power LED effect fan for TV studios, rental, etc.

Each of the 6 blades is equipped with 5 RGB LED sections. You can control each blade and each of the 5 sections individually.

In addition, a UV LED effect has been added

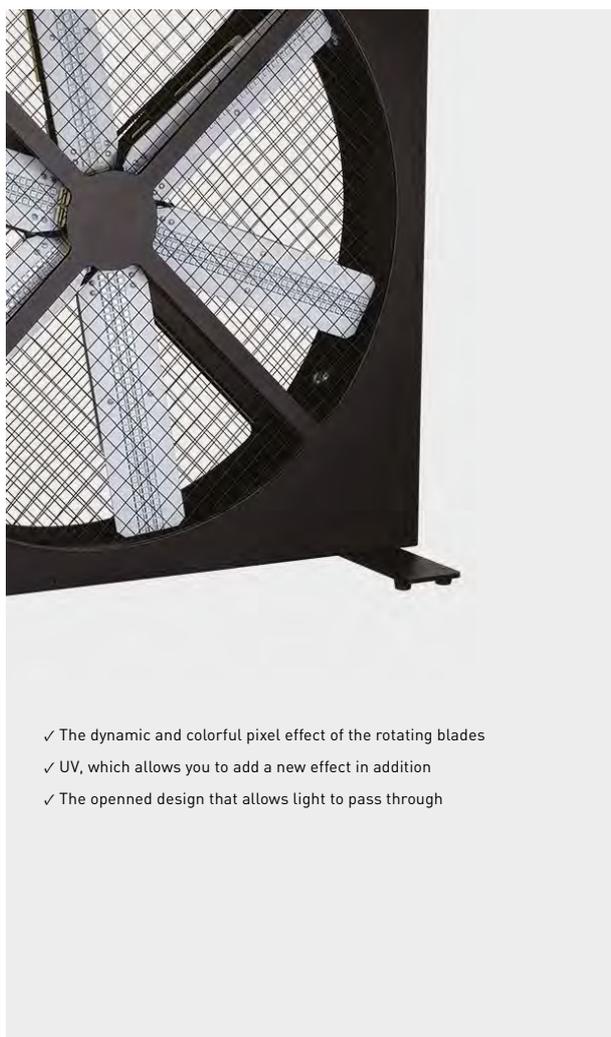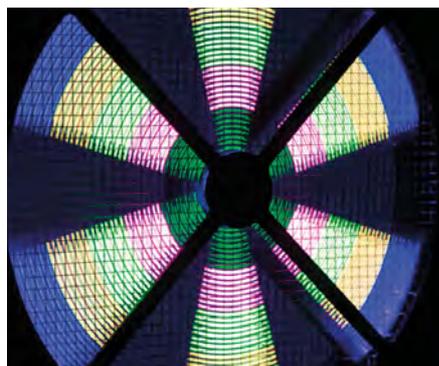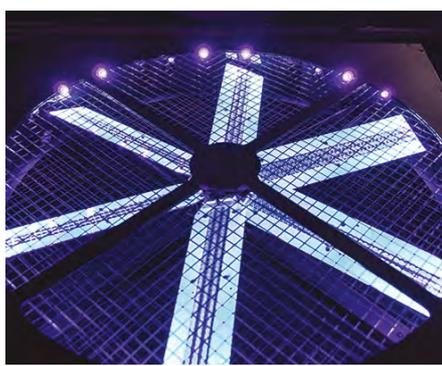

- ✓ The dynamic and colorful pixel effect of the rotating blades
- ✓ UV, which allows you to add a new effect in addition
- ✓ The opened design that allows light to pass through



**BT-LEDROTOR**  
DMX controlled RGB+UV LED ROTOR

Code : B05516



**CASE FOR 4xBT-LEDROTOR**  
Flight case for 4 x BT-Ledrotor

Code : B03283



Mains Input: AC 100V - 240V, 50/60Hz  
Power connections: Neutrik® PowerCON  
Power consumption (full power): 240 W  
Daisy chaining: 9pcs (@ 240Vac)  
Power factor: →0.95  
Protection class: 1  
IP-rating: IP20  
Fuse: 250V 3A thermal fuse (5 x 20mm)  
DMX connections: 3pin + 5pin XLR male / female  
DMX channels used: 5 + 12 + 33 channels  
UV LEDs: 32pcs 3W (UV, 405nm)  
RGB LEDs : 720pcs 0.2W RGB-leds  
LED refresh rate: 0.6 kHz  
Ambient temperature: 40°C  
Weight: 18kg (20.3kg incl. 2x floor stand)

# HYBRID MOVING HEAD



- OSRAM SIRIUS HRI 280 (7800 K°) lamp
- BEAM: from 2.6° to 11°
- SPOT: from 5.2° to 23°
- 1 wheel with 13 colours
- 14 fixed gobos + open
- 9 replaceable rotating gobos
- 8-facet prism + linear with 6 facets
- Frost | Zoom + Focus

- 270W CW LED
- Linear zoom from 8 to 45°
- 3-facet prism
- Wheel with 7 rotating gobos + open
- Wheel with 9 colours including 2xCTO 1xCTB, UV + open
- Iris
- Frost
- Focus
- Trichromy



## BTX-TITAN

BEAM + SPOT + WASH effects

Code : B04378



## CASE FOR 2x BTX-TITAN

Flight case for 2x BTX-TITAN

Code : B03251



## BTX-SATURN

Hybrid Moving head with 270 W LED

Code : B04428



## MOVING HEAD CASE

5

Flight case for 2x BTX-SATURN

Code : B03291




OSRAM SIRIUS HRI 280 source  
 Beam from 2.6° to 11°: 82,650 lux at 20 m  
 Spot from 5.2° to 23°: 25400 lux at 10 m  
 2 combinable prisms:  
 8-facet circular rotating prism  
 6-facet linear rotating prism  
 wheel with 9 rotating gobos + open  
 wheel with 14 fixed gobos + open  
 wheel with 13 dichroic colours (CTO-CTB)  
 Frost effect (WASH)  
 Stroboscopic effects  
 Motorised Focus + Zoom  
 Variable dimmer from 0 to 100%  
 DMX mode: 16, 24 or 25 channels  
 Drop-down menu display  
 Amplitude: 540° pan - 270° tilt  
 Power consumption: 400W  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 391x287x583 mm  
 Net weight: 22 Kg

270W CW LED source  
 Linear zoom from 8 to 45°  
 3-colour process with dichroic CMY filters  
 3-facet circular rotating prism  
 Wheel with 7 rotating gobos + open  
 Wheel with 9 fixed gobos + 3 reducers  
 Wheel with 9 colours including 2xCTO,  
 1xCTB, UV + open  
 Variable iris  
 Frost effect (WASH)  
 Stroboscopic effects motorised focus  
 Electronic dimmer variable from 0 to  
 100%  
 DMX mode: 25 channels  
 Drop-down menu display  
 Amplitude: 540° pan - 270° tilt  
 Power IN/OUT: Neutrik powerCON®  
 TRUE-1  
 DMX IN/OUT: XLR 3+5pin  
 Power supply: AC 100/230V - 50/60Hz



# HYBRID MOVING HEAD

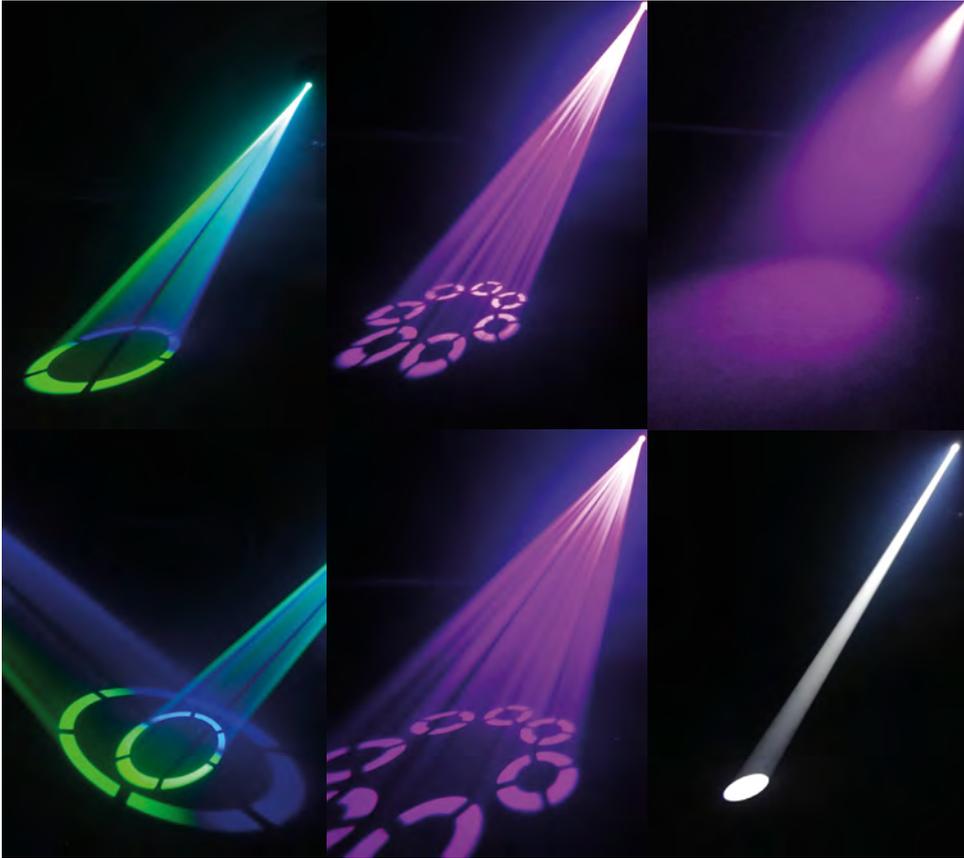

**NEW**

**CHALLENGER BSW**  
150W Beam/Spot/Wash Moving head with motorized focus and zoom and 3 facet rotating prism!

Code : B05528


**NEW**

**CASE FOR 2xCHALLENGERBSW**




Code : B03295

- 3 in 1 moving head
- Beam 2° - Spot 15° - Wash 28°
- 150 W LED
- Beam/Spot/Wash
- Motorized focus
- Motorized zoom
- 3-facet rotating prism

150W 3in1 LED  
Moving Head – Beam - Spot/Wash  
Beam 2° - Spot 15° - Wash 28°  
Focus controlled by DMX  
Zoom controlled by DMX  
PAN 540° - Tilt 270°  
3 facet rotating prism  
0-100% dimming and different strobe effects  
Separate gobo wheel with 7 fixed gobos + open  
Separate gobo wheel with 6 rotating gobos + open  
Excellent built-in programs for wonderful, ever changing, light shows.  
Multiple working modes: DMX-control: via 5, 17 or 20 channels  
Standalone: sound activated with internal mic  
Master/slave: Wonderful synchronized shows in standalone mode  
Innovative 5CH SMART-DMX  
Prepared for wireless DMX  
WTR-DMX DONGLE [Briteq® order code: B04645]

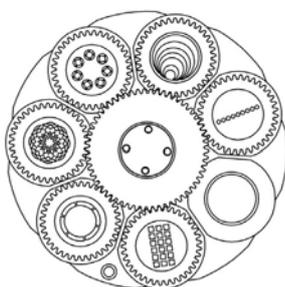

Gobos

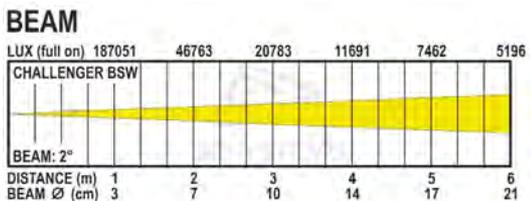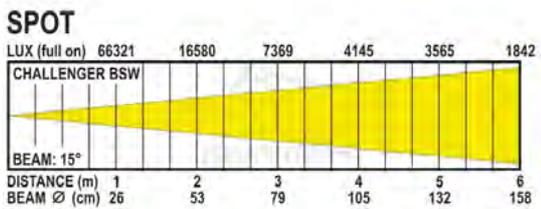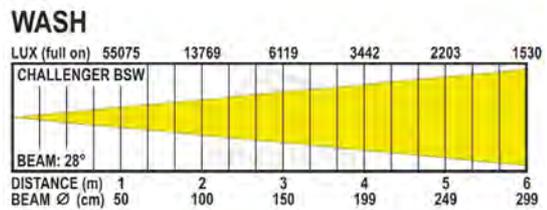

# SPOT MOVING HEAD





**BT-METEOR**  
Compact and extremely bright LED moving head

Code : B04384





**MOVING HEAD CASE 1**  
Flight case for 2x BT-METEOR, BT-70LS, BT-BEAM70

Code : B03255

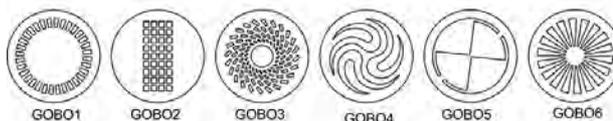100W CW LED source  
 motorised focus  
 Beam opening: from 12° to 16°  
 Strobe, pulse effect and random strobe  
 3-facet rotating prism  
 wheel with 6 rotating gobos + open  
 wheel with 8 dichroic colours + open  
 Electronic dimmer variable from 0 to 100%  
 DMX mode: 5, 11 or 14 channels  
 Synchronised shows (internal microphone)  
 Master / Slave mode  
 Drop-down menu display to assign and  
 select different modes  
 Wireless DMX: WTR-DMX dongle (optional)  
 Power consumption: 160W  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 290x180x435mm  
 Net weight: 8.75 Kg

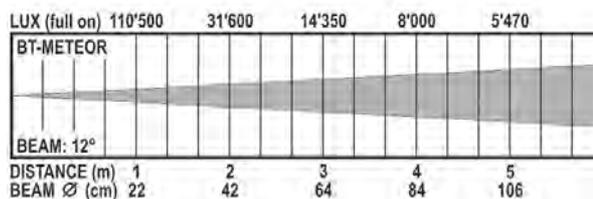

# SPOT MOVING HEADS



## BTX-HAWK

Very bright moving head controlled by a powerful 180 W LED module!

Code : B04398



180W CW LED source  
 motorised focus  
 Beam opening: 12°  
 3-facet rotating prism + linear prism  
 wheel with 7 rotating gobos + open  
 wheel with 9 fixed gobos + open  
 wheel with 7 dichroic colours + open  
 Frost filter  
 Electronic dimmer variable from 0 to 100%  
 DMX mode: 11 or 13 channels  
 Synchronised shows (internal microphone)  
 Master / Slave mode  
 Drop-down menu display to assign and  
 select different modes  
 Wireless DMX: WTR-DMX dongle (optional)  
 Power consumption: 230W  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 393x558x288 mm  
 Net weight: 16.5 Kg



## CASE for 2x BTX-HAWK

Flight case for 2x Briteq BTX-HAWK

Code : B03263



## CLUBSPOT

Compact moving head with 35W LED

Code : B05506




35W CW LED source  
 Manual focus  
 12° opening  
 Stroboscopic effects  
 Wheel with 7 fixed gobos + open  
 Wheel with 7 dichroic colours + open  
 Electronic dimmer variable from 0 to 100%  
 DMX mode: 5, 9 or 11 channels  
 Wireless DMX: WTR-DMX dongle (optional)  
 Synchronised shows (internal microphone)  
 Master / Slave mode  
 Drop-down menu display to assign and  
 select different modes  
 Amplitude: 540° pan - 270° tilt  
 DMX IN / OUT by XLR 3-pin plugs  
 POWER IN / OUT by IEC plugs  
 Power consumption: 60W maximum  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 284.5 x 205 x 149 mm  
 Net weight: 3.5 Kg



## MOVING HEAD CASE 6

Flight case for 4x Clubspot/Clubwash 2

Code : B03296

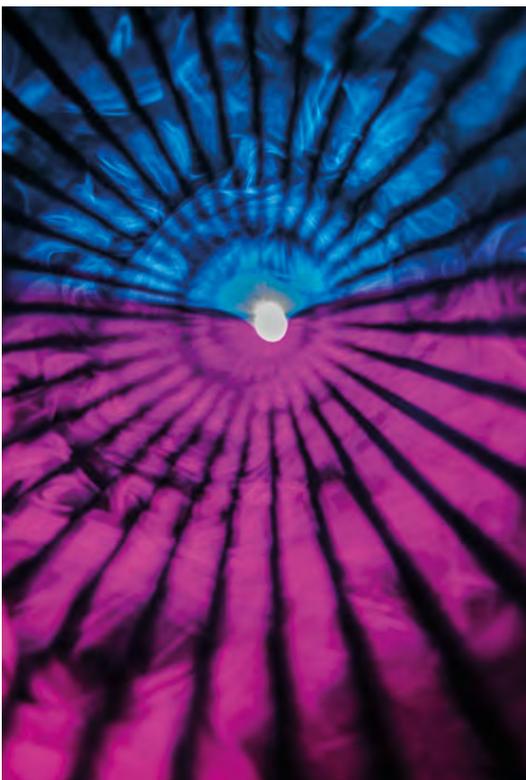

BTX-HAWK



CLUBSPOT

# WASH/BEAM MOVING HEADS



## BTX-CIRRUS II

The power, the beam angle and perfect pixel effect



### BTX-CIRRUS II

Led Moving wash 19x30W FC pixel control  
4-60°

Code : B05526



Mains Input: AC 100-240V, 50/60Hz  
Power consumption: 650W  
DMX connections: 3pin & 5pin XLR IN/  
OUT  
Movement: Pan: 540° Tilt: 210° (+ Pan/  
Tilt lock for transport protection)  
Beam angle: 4°→60°  
DMX channels used: 20-29-48-77-86-96  
Channels  
Lamp: 19 Osram 30W RGBW LEDs  
Weight: 16 kg



### MOVING HEAD CASE

4


Flight case for 2x BTX-CIRRUS

Code : B03288




- LED moving head 19x30
- OSRAM LEDs
- 19000 Lux@5m/4°
- Full pixel mapping
- Zoom from 4° to 60°.
- Three-phase motors Moons
- Noiseless operation

LUX (red 640nm)	11112	4000	2041	1000	695	445
LUX (green 520nm)	24167	8700	4440	2175	1510	967
LUX (blue 445nm)	4235	1525	776	381	265	170
LUX (white 7200K)	32687	11770	6004	2942	2043	1307
LUX (full on)	70832	25500	13010	6375	4427	2833

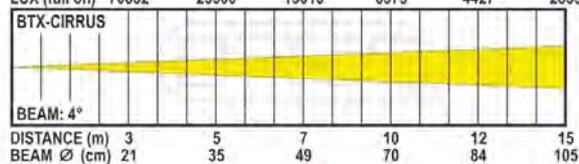

LUX (red 640nm)	341	155	79	39	27	17
LUX (green 520nm)	958	345	176	86	60	38
LUX (blue 445nm)	167	60	31	15	10.5	6.7
LUX (white 7200K)	1278	460	235	115	80	51
LUX (full on)	2722	980	500	245	170	109

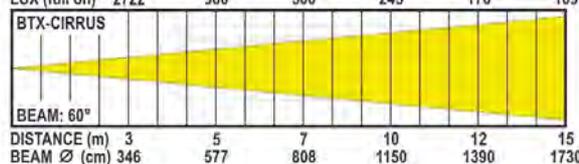

# WASH/BEAM MOVING HEADS



## BT-ORBIT

Led Moving wash 19x15W RGBW ring control 10-60deg

Code : B04423



## MOVING HEAD CASE 2

Flight case for 4 BT-Orbit / BT-W19 moving head

Code : B03272



19 15W RGBW LED sources  
 Opening from 10° to 60° by motorised lighted zoom: 8400 LUX at 5m at 10°  
 Programmable white balance  
 Colour preset, Colour macro  
 Strobe, pulse effect and random strobe  
 Electronic dimmer variable from 0 to 100%  
 Wireless DMX: WTR-DMX dongle (optional)  
 Independent control of three colour zones (outer ring, inner ring and central point)  
 DMX mode: 14 or 27 channels  
 Drop-down menu display to assign and select different modes  
 Amplitude: 540° pan - 270° tilt  
 DMX IN / OUT by XLR 3/5-pin plugs  
 POWER IN / OUT by Powercon plugs  
 Power consumption: 290W maximum  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 395 x 325 x 225 mm  
 Net weight: 9 Kg

LUX (full on)	196659	49165	21851	13125	8400	5833
BT-ORBIT	[Beam diagram for 10° beam angle]					
BEAM: 10°						
DISTANCE (m)	1	2	3	4	5	6
BEAM Ø (cm)	17	35	52	70	87x	105
LUX (full on)	5586	1396	621	349	223	155
BT-ORBIT	[Beam diagram for 60° beam angle]					
BEAM: 60°						
DISTANCE (m)	1	2	3	4	5	6
BEAM Ø (cm)	115	231	346	462	577	693

# WASH/BEAM MOVING HEADS



**BT-W30FC Mk2**  
Wash moving head 3 x 10W RGBW

Code : B04371



3 10W RGBW LED sources  
25° opening  
Strobe, pulse effect and random strobe  
Electronic dimmer variable from 0 to 100%  
DMX mode: 9 or 16 channels  
Synchronised shows (internal microphone)  
Master / Slave mode  
CA8 compatible (option)  
Drop-down menu display to assign and select different modes  
Amplitude: 540° pan - 270° tilt  
DMX IN / OUT by XLR 3-pin plugs POWER IN by IEC plug + 16A plug  
Power consumption: 57.4W maximum  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 272 x 231 x 248 mm  
Net weight: 6 Kg



**STRIKER**  
LED spot (10°-30W-white) and wash (6 x 8W RGBW) moving head

Code : B04190





Spot 30W CW LED sources  
Wash 6 8W RGBW LED sources  
Beam opening 10° (Spot)  
Motorised focus  
wheel with 7 fixed gobos + open  
wheel with 7 dichroic colours + open  
Electronic dimmer variable from 0 to 100%  
Stroboscopic effects  
DMX mode: 5 or 19 channels  
Wireless DMX: WTR-DMX dongle (optional)  
Synchronised shows (internal microphone)  
Master / Slave mode  
Drop-down menu display to assign and select different modes  
Amplitude: 540° pan - 270° tilt  
DMX IN / OUT with 3-pin plugs  
POWER IN by IEC plug + 16A plug  
Power consumption: 95W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 150x230x330mm  
Net weight: 4.53 Kg



**CASE for 4x STRIKER**  
Flight case for 4x STRIKER

Code : B03267

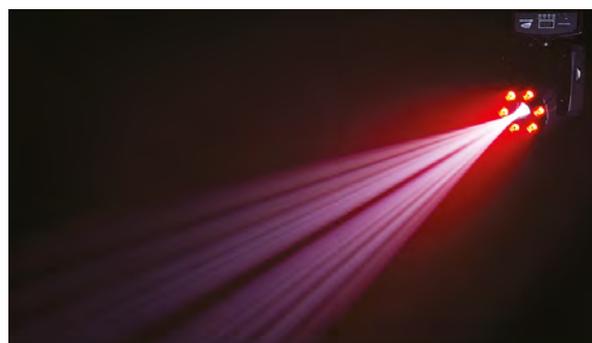

# WASH/BEAM MOVING HEADS

**NEW**




## CLUBWASH 2

A remarkably small and super lightweight 6in1 moving wash for DJ's, pubs and small discotheques

Code : B05529



12x RGBWAUV 12W LEDs, 6 in 1  
25° opening  
0-100% dimming and various strobe effects  
Wireless DMX: WTR-DMX DONGLE!  
(optional, code B04645)  
DMX control: via 5, 9 or 15 channels  
Music mode  
Master/Slave  
Power consumption: 160 W  
Weight: 3.5kg

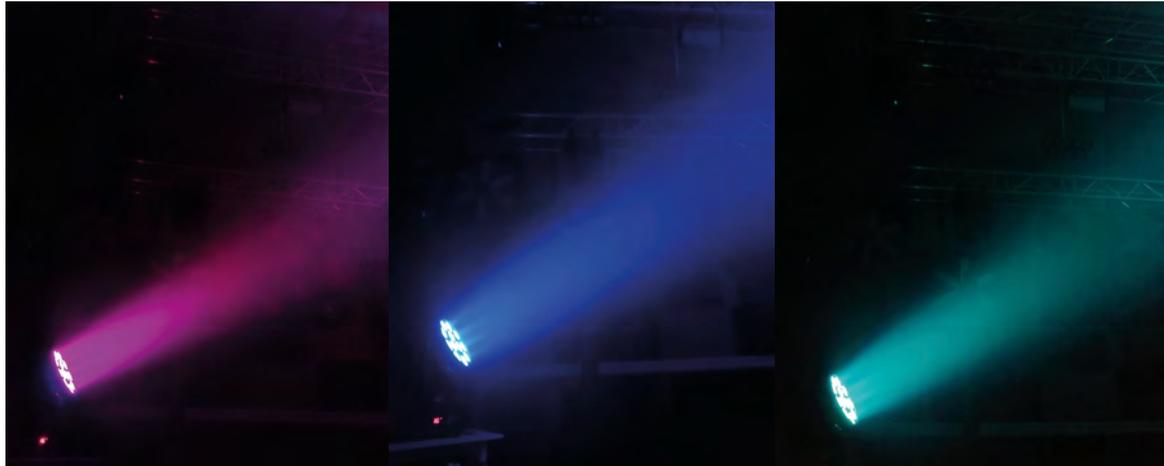

A remarkably small and super light lyre. Ultra powerful with its RGBWAUV 12W, 6 in 1 leds. The perfect solution for many applications.

Prepared for wireless DMX: just plug in a WTR-DMX DONGLE!  
(optional, code Briteq® B04645)



## CLUBWASH

Wash moving head 7 x 12W RGBWAUV

Code : B05505



7 12W RGBWAUV LED sources  
25° opening  
Stroboscopic effects  
Electronic dimmer variable from 0 to 100%  
DMX mode: 5, 9 or 15 channels  
Wireless DMX: WTR-DMX dongle (optional)  
Synchronised shows (internal microphone)  
Master / Slave mode  
CA8 compatible (option)  
Drop-down menu display to assign and select different modes  
Amplitude: 160° pan - 90° tilt  
DMX IN / OUT by XLR 3-pin plugs  
POWER IN / OUT by PowerCON plugs  
Power consumption: 90W maximum  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 322.4 x 266.5 x 154 mm  
Net weight: 3 Kg



**NEW**



## CLUBWASH MINI

A remarkably small and super lightweight 6in1 moving wash!

Code : B05530



4x RGBWAUV LEDs 12W, 6in1  
25° opening  
Power consumption only 60 W!  
0-100% dimming and various strobe effects  
DMX control: via 5, 9 or 15 channels  
Music mode  
Master/slave.  
Power consumption: 60 W  
Weight: 1.6kg

**NEW**




## MOVING HEAD CASE 6

Flight case for 4x Clubspot/Clubwash 2

Code : B03296



# BEAM MOVING HEAD

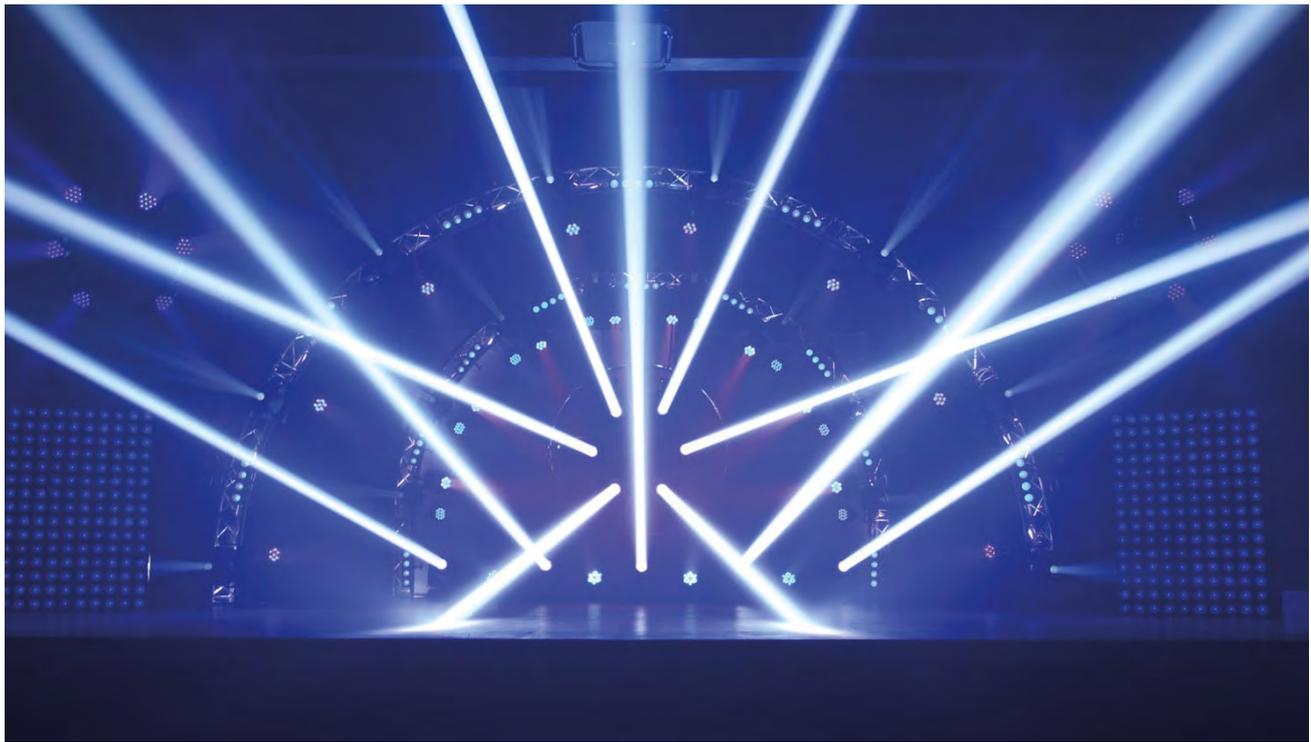

A super compact but very powerful moving beam projector based on the brand-new SIRIUS HRI-100 discharge lamp from OSRAM The advanced optics guarantee an incredibly bright beam with excellent specs:

- Brightness : 310'000 lux @ 5m and 77'000 lux @ 10m!
- 3° Beam angle
- 10 sharp gobos + 4 beam shapers + open
- 14 carefully selected dichroic colors + open
- Very fast mechanical dimmer/shutter
- Different strobe functions

8-facet rotating prism with different macros, controlled by DMX

The very fast pan/tilt movements [540°/270°] assure very dynamic show programming.

Two DMX-modes:

**PRO:** 12ch mode with 16bit resolution pan/tilt resolution and position correction.

**AUTO:** 5ch mode with music controlled pan/tilt + control for dim, strobe, gobo, color, P/T speed.



## BT-TRACKER

Super compact but very powerful moving head SIRIUS HRI-100 lamp from OSRAM!

Code : B04387



Osram SIRIUS HRI 100W source  
 Light power: 307200 lux at 5m  
 Beam opening: 3°  
 Strobe, pulse effect and random strobe  
 8-facet rotating prism  
 wheel with 10 gobos + 4 reducers + open  
 wheel with 14 dichroic colours + open  
 Variable dimmer from 0 to 100%  
 DMX mode: 5 and 12 channels  
 Synchronised shows (internal microphone)  
 Master / Slave mode  
 Drop-down menu display to assign and select different modes  
 Amplitude: 540° pan - 270° tilt  
 Power consumption: 194.5 W maximum  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 279 x 225 x 401 mm  
 Net weight: 9.2 Kg




## CASE for 4x BT-TRACKER

Flight case for 4x BT-TRACKER.

Code : B03264



# LED EFFECT MOVING HEADS

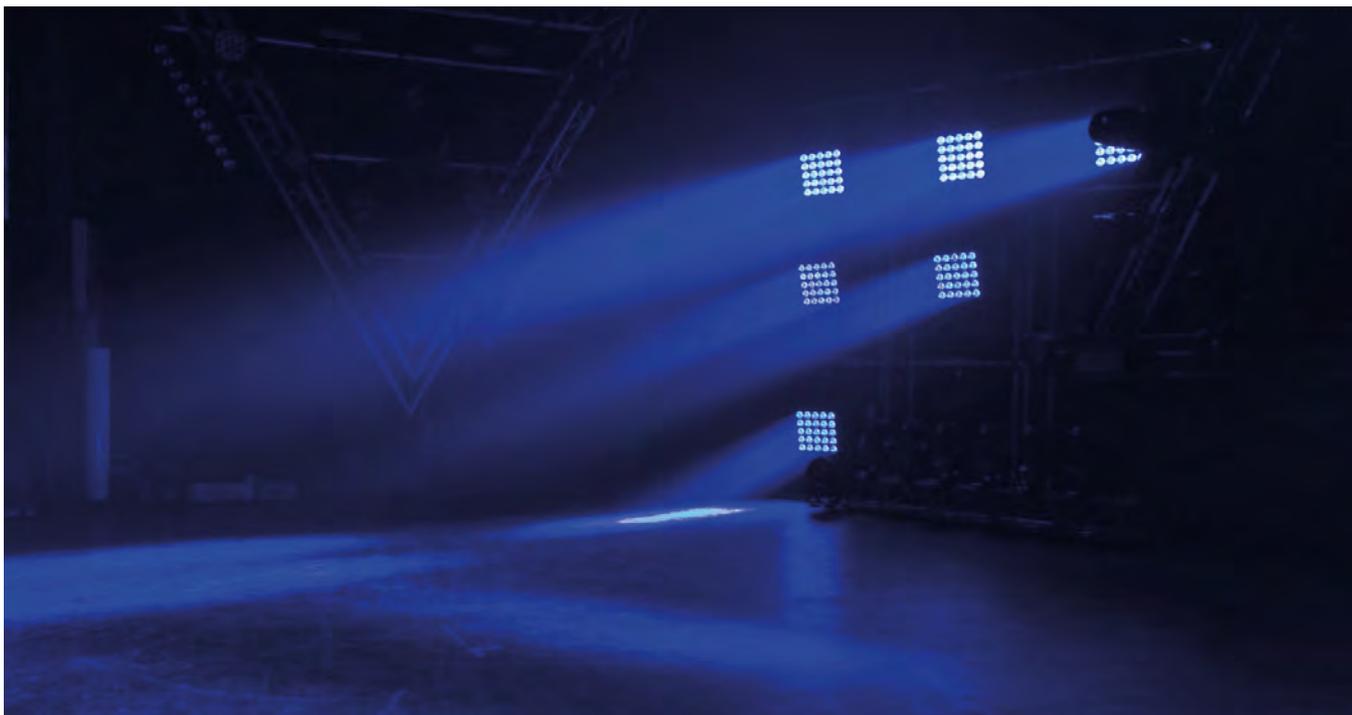


**BEAM WIZARD5x5**  
Moving head with 5x5 15W RGB LEDs

Code : B04417



25 15W RGBW (5 x 5) LED sources  
4° opening per lens  
Infinite PAN and TILT rotation  
Light: 29700 LUX at 5m  
Colour Preset and Macro  
Patterns: letters, digits and figures with customisable colours  
Automatic or musical programmes  
Strobe, pulse effect and random strobe  
Electronic dimmer variable from 0 to 100%  
DMX mode: 12, 18, 110 and 116 channels  
Ethernet port: Art-NET  
Drop-down menu display to assign and select different modes  
Amplitude: 630° pan - 270° tilt  
DMX IN / OUT by XLR 3/5-pin plugs  
POWER IN / OUT by Powercon plugs  
Ethernet IN/OUT by RJ45  
Power consumption: 420W maximum  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 583 x 481 x 352 mm  
Net weight: 18.6 Kg




**CASE FOR BEAM WIZARD5x5**  
Flight case for 2x BT-BEAM WIZARD

Code : B03256




# LED EFFECT MOVING HEADS

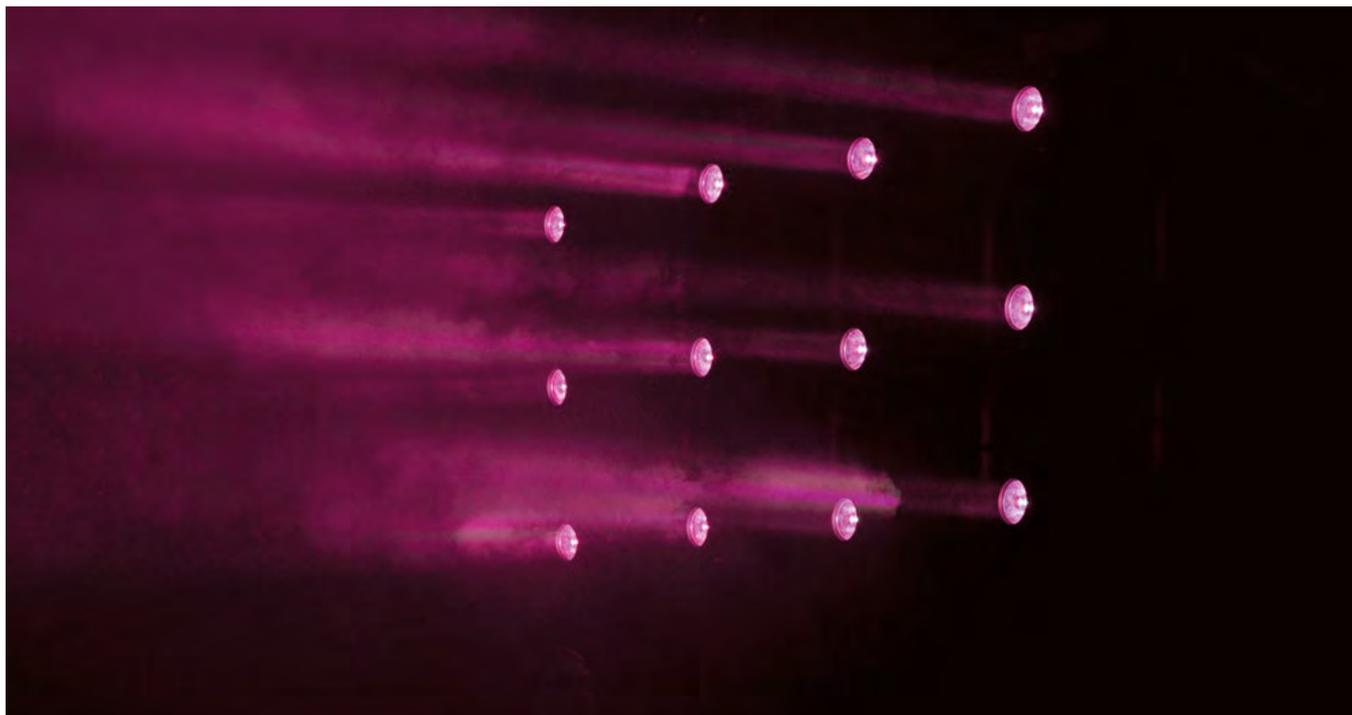

The combination of a 60W RGBW led and a very efficient collimator optic 4° lens results in an extremely powerful single beam projector.

Thanks to its endless possibilities you can create astonishing light shows!



## BEAM FURY-1

Moving head with 60W RGBW LED and continuous rotation

Code : B04394



60 W RGBW COB LED source  
 4° opening (10° and 45° filters included)  
 Infinite PAN and TILT rotation  
 Light: 5280 LUX at 5m at 4°  
 Colour Preset and Macro  
 Automatic or musical programmes  
 Strobe, pulse effect and random strobe  
 Electronic dimmer variable from 0 to 100%  
 DMX mode: 16 and 18 channels  
 Drop-down menu display to assign and select different modes  
 Amplitude: 540° or 630° pan - 270° tilt  
 DMX IN / OUT by XLR 3/5-pin plugs  
 POWER IN / OUT by Powercon plugs  
 Power consumption: 80W maximum  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 304 x 236 x 186 mm  
 Net weight: 5.3 Kg



## CASE for 6x BEAM FURY-1

Flight case for 6x BEAM FURY-1

Code : B03265



# MOVING HEAD COMPARISON

## Hybrid Beam/Spot/Wash

REF	Name	Brand	Source	Program Auto	CMY	Color wheel	Interchangeable rotating gobos	Fixed gobos	Rotating circular prism
B04378	BTX-TITAN	Briteq	HRI280 280W	-	-	13 colors [CTO + CTB]	9 gobos	14 gobos	8 facets cumulable
B04428	BTX-Saturn	Briteq	LED 270W	-	yes	9 colors [CTO + CTB + UV]	7 gobos	9 gobos	3 facets
B05528	CHALLENGER BSW	JB Systems	LED 150W	yes	-	8 colors	6 gobos	7 gobos	3 facets

## Beam moving head

REF	Name	Brand	Source	Beam angle	Auto Program	Color wheel	Gobos	Rotating circular prism
B04387	BT-TRACKER	Briteq	HRI-100 100W	3°	sound	14 colors	15 gobos	8 facets

## Spot moving head

REF	Name	Brand	Source	Beam angle	Dongle wifi B04645	Program auto	Color wheel	Interchangeable rotating gobos
B04398	BTX-HAWK	Briteq	LED 180W	12°	yes	yes	7 colors	7 gobos
B04384	BT-METEOR	Briteq	LED 100W	12° à 16°	yes	yes	8 colors	6 gobos
B05506	CLUBSPOT	JB Systems	LED 35W	12°	yes	yes	7 colors	-

## Wash / Beam moving head

REF	Name	Brand	LED source	Beam angle	Dongle wifi B04645	IR remote	Auto program	Macro PAN / TILT	Colour wheel
	BTX-CIRRUS	Briteq	19x30W RGBW	4° à 60°	-	-	-	-	-
B04423	BT-ORBIT	Briteq	19x15W RGBW	10° à 60°	yes	-	-	-	-
B04371	BT-W30FC Mk2	Briteq	3x10W RGBW	25°	-	-	yes	yes	-
B05529	CLUBWASH 2	JB Systems	12x12W RGBWA+UV	25°	yes	-	yes	-	-
B05505	CLUBWASH	JB Systems	7x12W RGBWA+UV	25°	yes	-	yes	-	-
B05530	CLUBWASH MINI	JB Systems	4x12W RGBWA+UV	25°	-	yes	yes	-	-
B04190	STRIKER	JB Systems	30W White 6x8W RGBW	10° spot	yes	-	yes	yes	7 colors

## Effect LED moving head

REF	Name	Brand	LED source	Beam angle	Continuous Pan/Tilt rotation	Art-NET	Program Auto	Multi zones pixel	Motorized zoom
B04417	BEAM WIZARD5x5	Briteq	25x15W QC	25x 4,5°	yes	yes RJ45 IN/OUT	yes	25	-
B04394	BEAM FURY-1	Briteq	60W	4°-10°45°	yes	-	-	-	-

Linear rotating prism	Iris	Frost	Zoom Beam - Spot	Focus	DMX channels	Battery	DMX XLR	Power supply	Weight	Flight case
6 facets cumulable	-	Linear	2,7° à 23°	yes	16-24-25	yes	3 et 5 points	Powercon IN - OUT	22Kg	B03251
-	yes	Linear	8° à 45°	yes	25	-	3 et 5 points	Powercon TRUE1 IN - OUT	22,7 kg	B03291
-	-	-	2° à 28°	yes	5-17-20	-	3 et 5 points	Powercon IN - OUT	12,3 kg	B03295

DMX channels	DMX XLR	Power supply	Weight	Flight case
5-12	3 points	Powercon IN - OUT	9,7Kg	B03264

Fixed gobos	Rotating circular prism	Linear Prism	Frost	Focus	Channels DMX	Battery	DMX XLR	Power supply	Weight	Flight case
9 gobos	3 facets	yes	yes	motorized	5-13-15	yes	3 et 5 points	Powercon IN - OUT	15,5Kg	B03263
-	3 facets	-	-	motorized	5-11-14	-	3 points	Powercon IN - OUT	8,75Kg	B03255
7 gobos	-	-	-	manual	5-8-11	-	3 points	IEC IN	3,5kg	B03267

Gobo wheel	Multi zones pixel	Motorized Zoom / Focus	Channels DMX	DMX XLR	Power supply	Weight	Flight case
-	19	Zoom	20-96	3 et 5 points	Powercon TRUE1 IN - OUT	16,5 kg	B03288
-	3	Zoom	14a-14b-27	3 et 5 points	Powercon IN - OUT	9,2Kg	B03272
-	-	-	1-4-1-9-16	3 points	IEC IN - OUT	4,2Kg	B03225
-	-	-	5-9-15	3 points	IEC IN	3,5 kg	B03296
-	-	-	5-9-15	3 points	IEC IN	3 kg	B03267
-	-	-	5-9-15	3 points	IEC IN	1,6 kg	-
7 gobos	Spot / Wash	Focus	5-19	3 points	IEC IN	4,5Kg	B03267

Number of dmx channels	Battery	DMX XLR	Power supply	Weight	Flight case
12-18-110-116	yes	3 et 5 points	Powercon IN - OUT	20Kg	B03256
12-14	yes	3 et 5 points	Powercon IN - OUT	6,2Kg	B03265



# ANIMATION EFFECTS



## RAVE BAR

LED Bar with 14x3W + 300 SMD LED

Code : B06208



14x3W Warm White Leds  
120 SMD RGB Leds  
180 SMD Cold White Leds  
Compatible WTR-DMX DONGLE.  
DMX-control: via 1, 2, 6, 34 or 37 channels  
Music mode  
Master/slave4



## SUNBAR COMBI

Light bar 7x3W WW + 7x9W RGB LEDS

Code : B06207



7x3W warm white LEDs with individual pixel control + 7x9W RGB Leds.  
Full DMX-control via 1, 4, 11, 12 or 17 channels.  
Sound mode.  
Compatible WTR-DMX DONGLE.



## SUNBAR WHITE

Light bar 10x3W LED WW 7°beams, L=1m

Code : B06206



10x3W warm white LEDs and pixel control.  
DMX control via 1, 3, 5, 10 or 15 channels.  
Control each pixel manually or use one of the 17 integrated automatic programs.  
Sound mode.  
Master/slave mode for bigger setups.  
Compatible WTR-DMX DONGLE.10x3W warm white LEDs and pixel control.



## CASE FOR 4 EFFECT BARS 1M

JV Case Flightcase for 4 effect bars like Sunbar White or Combi, Rave Bar


Code : B03294



RAVE BAR



SUNBAR COMBI

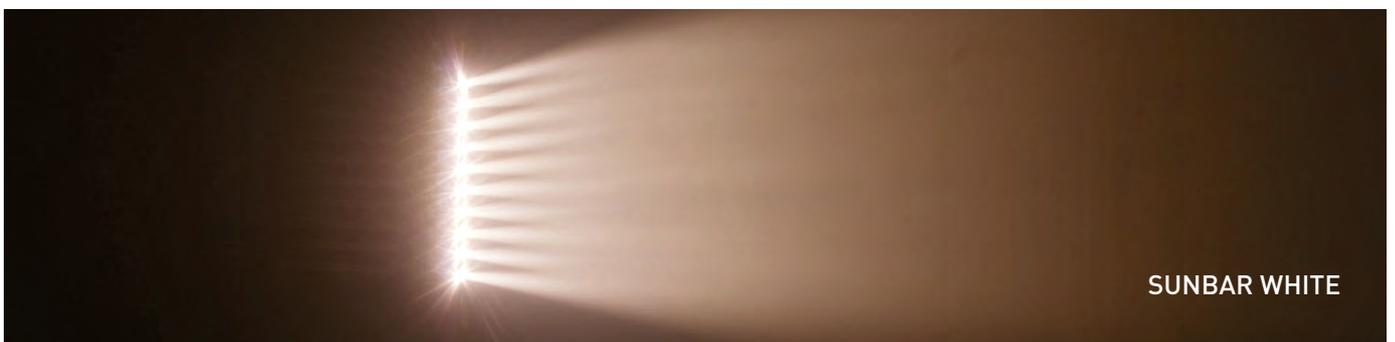

SUNBAR WHITE

# ANIMATION EFFECTS



## LED GLOBE

Rotating effect with 98 beams. 5x 2W RGBW LED

Code : B06202



Power supply: 100 to 240 V AC, 50/60Hz  
 Fuse: 250 V 1.6A slow-blow (20 mm glass)  
 Total consumption: 60 W  
 Sound control: Internal microphone  
 DMX connections: XLR 3-pin male/female  
 No. of DMX channels: 1, 3, 9 or 19 channels  
 LED power: 5 RGB LEDs + White 8 W  
 Dimensions: 397 x 397 x 397 x 510mm  
 Weight: 4,23kg  
 Wireless DMX: WTR-DMX dongle (optional)



## LED HELICOPTER

Rotating effect with 6x RGBW projectors

Code : B06203



Power supply: 100 to 240 V AC, 50/60Hz  
 Fuse: Slow fuse 250 V T1.6 A (20 mm glass) Total consumption: 60W  
 Sound control: Internal microphone  
 DMX connections: XLR 3-pin male/female  
 No. of DMX channels: 3 or 11 channels  
 PAR projector power: 6 projectors with 8 W RGBW LED  
 Beam angle: 7°  
 Dimensions: 390x360x360x240 mm  
 Weight: 4,16kg  
 Wireless DMX: WTR-DMX dongle (optional)



## HEXAGON 3D

3D Hexagonal RGB wall mirror effect

Code : B06205



Power supply: 100 to 240 V AC, 50/60Hz  
 Fuse: Slow fuse 250 V 2 A (glass 20 mm)  
 Maximum power consumption: 50 W  
 Sound control: Internal microphone  
 DMX connections: XLR 3-pin male/female  
 No. of DMX channels: 3 and 9 channels  
 LED: 72 x red-green-blue LED 1.5 W  
 Dimensions: 404 x 352 x 97 mm  
 Weight: 3.2 kg



## DYNABARREL

LED effect with rotating mirror

Code : B04187



10W RGBW LED source  
 manual focus  
 DMX mode: 1 or 9 channels  
 Synchronised shows (internal microphone)  
 Simplified control: CA8 compatible  
 Master / Slave mode  
 DMX IN / OUT by XLR 3-pin plugs POW-ER IN / OUT by IEC plugs  
 Power supply: AC 100/230V - 50/60Hz  
 Dimensions: 331 x 170 x 120 mm  
 Net weight: 2.95 Kg



## PIXEL PIPE

RGB LED tube 1m with DMX and IR remote

Code : B06204



Power supply: 100-240 V AC, 50/60 Hz  
 Power consumption: 12 W  
 Power interconnection (IEC input/output) : maximum link load = 6 A  
 Sound control: Internal microphone  
 DMX connections: 3-pin male/female  
 XLR male to female  
 DMX mode: 3, 7, 24 DMX channels  
 LED light source: 32 RGB LED SMD5050  
 Dimensions: 105 x 20 x 20 x 22 cm  
 Weight: 1.24 kg



# ANIMATION EFFECTS



**ORION**  
LED effect

---

Code : B04143

---



4 groups with a total of 224 LEDs  
(80 red, 60 green, 48 blue, 36 white)  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1, 4 and 7 channels  
Simplified control (CA-8 compatible)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 30 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 475 x 290 x 160 mm  
Net weight: 5.3 kg




**ALIEN**  
LED effect + UV + stroboscope + laser

---

Code : B06200

---



3 projectors with 9 8 W RGB+UV LEDs  
Effect with 84 0.75 W RGBA LEDs  
Stroboscopic: 12 0.5 W white LEDs  
Laser: red (100 mW) and green (30 mW)  
laser motifs  
IR remote control included  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 3, 9, 11 or 28 channels  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 66 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 830 x 171 x 202 mm  
Net weight: 5 kg




**SUPER LED RAINBOW**  
Powerful multibeam LED effects

---

Code : B04171

---



6 10W RGBW LED sources  
Beam opening 9° per lens  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1, 8 or 28 channels  
Simplified control (CA-8 compatible)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 80.6W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 418 x 233 x 122 mm  
Net weight: 4.18 kg




**SUPER QUADRA BEAM**  
Extremely dynamic scanning LED

---

Code : B04180

---



4 groups of 9 pcs 1W LEDs  
(8 x red, 8 x green, 8 blue, 12 x white)  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 3 channels  
Simplified control (CA-8 compatible)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 66 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 830 x 171 x 202 mm  
Net weight: 5 kg




**SUPER ORION**  
Extremely dynamic scanning LED effect

---

Code : B04179

---



4 groups of 9 pcs 1W LEDs  
(8 x red, 8 x green, 8 blue, 12 x white)  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 3 channels  
Simplified control (CA-8 compatible)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 67 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 430 x 256 x 172 mm  
Net weight: 4.1 kg



# ANIMATION EFFECTS



## PARTY DERBY

Compact projector with 2 different led effects

Code : B04186



## INVADER

Multieffect: 23W LED eff. + 200mW red+green laser

Code : B04176



## LED VIRTUAL FLAME

Flame simulator 36cm diameter

Code : B04544



Derby LED effect  
Stroboscopic: 16 white LEDs  
IR remote control included  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 5 channels  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 28 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 190 x 258 x 182 mm  
Net weight: 1.72 kg

Effect with 5 3 W RGBWA LEDs  
Stroboscopic: 8 1 W white LEDs  
Laser: red (150 mW) and green (50 mW) laser motifs  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 9 channels  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 66 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 240 x 220 x 110 mm  
Net weight: 3.75 kg

Equipped with 5 1W LED light emitting diodes  
The nearly silent fan allows a flame to be projected to a height of about 35 cm  
Place it on a flat surface or hang it with the set of fine mesh chains provided.  
Diameter of the fire cup: 36 cm  
Power consumption: 16.5W max.  
Power supply: AC 100/230V - 50/60Hz  
Net weight: 3.55 kg



## BEAMSPOT-4BAR NW

T-BAR with 4 BEAMSPOT NW 4500K

Code : B05508



## BEAMSPOT-4BAR WW

T-BAR with 4 BEAMSPOT WW 3200K

Code : B05507



## CASE FOR 4x BEAMSPOT-4BAR

Flight case for 4 x Beamspot-4Bar

Code : B03275



4 white 15W 4500K LED sources  
4° opening (10° and 45° filters included)  
Electronic dimmer from 0 to 100%  
2 Mode dimmer: Slow, Fast  
4 Dimmer curves (LINEAR, SQUARE, INV.SQUARE, S-CURVE)  
DMX mode: 1, 2, 4 or 5 channels  
Wireless DMX: WTR-DMX dongle (optional)  
Drop-down menu display  
DMX IN / OUT by XLR 3/5-pin plugs  
POWER IN / OUT by PowerCON plugs  
Spigot support 28mm  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 552 x 85 x 315 mm  
Net weight: 6.74 Kg

4 15W Warm white 3200K LED sources  
4° opening per lens (10° and 45° filters included)  
Electronic dimmer variable from 0 to 100%  
2 Mode dimmer: Slow (halogen), Fast (LED)  
4 Dimmer curves (LINEAR, SQUARE, INV.SQUARE, S-CURVE)  
DMX mode: 1, 2, 4 or 5 channels  
Wireless DMX: WTR-DMX dongle (optional)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3/5-pin plugs  
POWER IN / OUT by PowerCON plugs  
Spigot support 28mm  
Power consumption: 71W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 552 x 85 x 315 mm  
Net weight: 6.74 Kg



# ANIMATION EFFECTS



## SUPER BOOGIE

Double Led Flower DMX

Code : B04178



## SUPER ATLAS

Flower LED 9 x 1Watt


Code : B04177



## LED DIAMOND II

A LED projector controlled by very attractive and compact DMX

Code : B04188

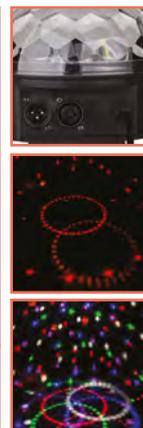

Equipped with 2 sets of 9 1 Watt LEDs (4 x red, 4 x green, 4 blue, 6 x white)  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 3 channels  
Simplified control (CA-8 compatible)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 35 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 246 x 230 x 164 mm  
Net weight: 2.6 kg

Equipped with 9 1 Watt LEDs (2 x red, 2 x green, 2 blue, 3 x white)  
Automatic programmes (internal microphone)  
Consumption: 20 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 141 x 224 x 203 mm  
Net weight: 1.4 kg

6 3W LED sources (1 red + 1 green + 1 blue + 1 white + 1 orange + 1 violet)  
The various lenses project many beams of clean colour over more than 360 degrees  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 1 or 6 channels  
Drop-down menu display to assign and select different modes  
DMX IN / OUT with 3-pin plugs  
Power consumption: 24 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: dia 190 x 175 mm  
Net weight: 0.42 kg



## PARTY BAR

The PARTY BAR is a fabulous set of 4-in-1 lights for mobile DJs!

Code : B04184




The PARTY BAR is a fabulous 4in1 lighteffect

This extremely compact bar is stuffed with 4 different light effects to create a wonderful lightshow:

- 2 rotating Derby effects, each equipped with Red, Green and Blue 3 watt LEDs
- 2 LED projectors, each equipped with 3pcs 9 watt RGB LEDs for strong 15° beams
- 4 Cold white LEDs to create all kinds of strobe and blinder effects

The 2 color red/green laser projects hundreds of thin beams for a stunning atmosphere

2 Derby effects equipped with a 3 W RGB LED  
2 projectors with 3 RGB 9 W LEDs  
4 cool white LEDs to create stroboscopic effects  
The bi-colour red/green laser  
IR remote control included  
Synchronised shows (internal microphone)  
Automatic or musical programmes  
Master / Slave mode  
DMX control: 3, 5, 6, 9 or 27 channels  
Wireless DMX: WTR-DMX dongle (optional)  
Drop-down menu display to assign and select different modes  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 48 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 1185 x 386 x 110 mm  
Net weight: 8.35 kg

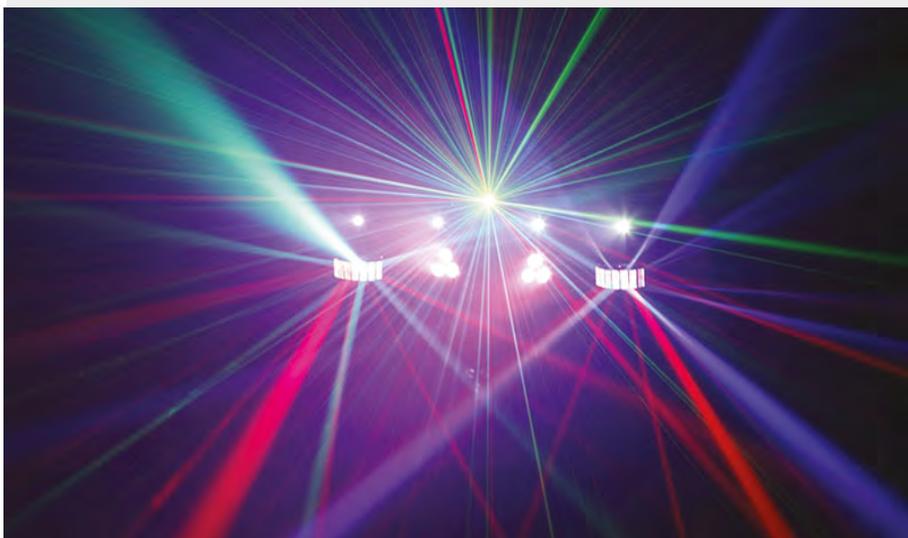



### PARTY BEAMS

This extremely compact bar is equipped with two different light effects to create superb light effects

Code : B04185



### LED POLICE LIGHT BLUE

Blue LED rotating beacon

Code : B04540



### LED POLICE LIGHT RED

Red LED rotating beacon

Code : B04541



### LED SIXLIGHT

6-channel chaser with integrated microphone

Code : B04538



8 9W RGB LED sources  
Beam opening 7° per lens + 4 White 1W LEDs (stroboscope)  
Pre-programmed shows, Colour control and stroboscopic LEDs  
Electronic dimmer variable from 0 to 100%  
Master / Slave mode  
DMX mode: 3, 9 or 14 channels  
DMX IN / OUT by XLR 3-pin plugs POWER IN / OUT by IEC plugs  
Power consumption: 76W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 605 x 184 x 268 mm  
Net weight: 3.2 kg

Rotating beacon with 108 extremely brilliant LEDs  
Adjustable rotation speed  
Weight: 0.86 Kg  
Dimensions: dia 143 x 182 mm  
AC 240V - 50Hz / 12 V DC adaptor supplied

Rotating beacon with 108 extremely brilliant LEDs  
Adjustable rotation speed  
Weight: 0.86 Kg  
Dimensions: dia 143 x 182 mm  
AC 240V - 50Hz / 12 V DC adaptor supplied

6 channel chaser  
Equipped with 282 LEDs (47 red, 47 green, 94 blue, 47 orange and 47 yellow)  
Modular: possibility of changing the shape of the device  
Integrated microphone  
Adjustable speed and audio sensitivity  
Weight: 2.1 Kg  
Dimensions: 365 x 347 x 182 mm  
AC 240V - 50Hz / 14 V DC adaptor supplied

# BLACK LIGHT



### LED UV-GUN 100W

UV projector with 100W "COB" LED

Code : B03807



UV 100W COB LED on individual reflector  
Beam angle: 100°  
DMX IN/OUT by XLR 3  
4-digit display with drop-down menu IR remote control for:  
Dimmer, Strobe, audio mode, Master/Slave  
Regulated fan cooling  
Power supply: AC 100/240V - 50/60Hz  
Dimensions: 263 x 309 x 300 mm  
Net weight: 4.1 Kg



### LED UV-BAR 9

Black light- 9x 3Watt LEDs

Code : B06209



A compact LED-based black light effect for all your parties  
Aluminum housing  
9x 3Watt LEDs  
No fragile, easy breakable lamps  
Lightweight  
Plug & play: no difficult controls!  
A compact LED-based black light effect for all your parties  
Aluminum housing  
9x 3Watt LEDs  
No fragile, easy breakable lamps  
Lightweight  
Plug & play: no difficult controls!



# LASERS



## BT-LASER1500 RGB

1.5 W - R:500 mW - G:200 mW - B:800 mW

Code : B04235



Superb 1.5Watt Class IV laser  
Incorporates 3 powerful coloured lasers (RVB):  
Red laser 500 mW (638 nm)  
Green laser 200 mW (532 nm)  
Blue laser 800 mW (450 nm)  
20Kpps scanners for clean, flawless RGB images!  
100% ILDA compatible for maximum flexibility in use!  
SD card reader to project your own motifs and logos.  
6 user modes  
**CONTROLLED BY THE MUSIC**  
MASTER/SLAVE  
AUTOMATIC  
DMX mode: 1 or 13 channels  
ILDA mode  
SD CARD mode  
Power consumption: 45W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 300 x 240 x 160 mm  
Net weight: 7.8 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers



## MULTIBEAM LASER

850 mW - 2xR: 150 mW - G: 50 mW - B: 500 mW

Code : B04236



RGRB White Class 3B 850 mW laser equipped with 4 powerful temperature controlled lasers:  
2 150 mW red lasers (650 nm)  
1 50 mW green laser (532 nm)  
1 500 mW blue laser (450 nm)  
4 user modes:  
Musical mode: 100% plug&play  
MASTER/SLAVE mode  
AUTOMATIC mode  
DMX mode: 2 or 10 channels  
Infrared remote control included  
LED display to facilitate navigation in the configuration menu  
Power consumption: 65W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 537 x 268 x 170 mm  
Net weight: 5 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers



## RADIANT LASER

240 mW - G: 40 mW - B: 200 mW

Code : B04222



Class 3B Laser with one green 40mW 532nm laser and one blue 200mW 450nm laser.  
Several modes are available:  
DMX mode: 1 or 10 channels  
Standalone mode: sound activated (via internal microphone) or automatic mode  
Master/Slave mode  
Simplified control (CA-8 compatible)  
Compatible with RF-DMX Converter:  
3-character LED screen for easy navigation through the menus.  
Power consumption: 30W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 250 x 240 x 190 mm  
Net weight: 2.92 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers



## SPECTRA-3D Laser

480 mW - R:100 mW - G:80 mW - B:300 mW

Code : B04230



RGB Class III 480mW laser  
25Kpps scanners combined with 4 effect wheels, Motifs and 3D effect shows, 80 motifs and RGB beams, burst effects... ILDA compatible for maximum use flexibility!  
User modes:  
MASTER/SLAVE STANDALONE: automatic and sound DMX mode: 1, 2 or 19 channels ILDA mode  
Power consumption: 40W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 290 x 240 x 110 mm  
Net weight: 4.16 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers




## LOUNGE LASER DMX

190 mW R: 150 mW - G: 40 mW

Code : B04221



190mW laser with one green 40mW laser and one 150mW red laser + blue LED projector with waterwave style!  
Several modes are available:  
DMX mode: 1 or 7 channels  
Standalone mode: sound activated (via internal microphone) or automatic mode  
Master/Slave mode  
3-digit LED display for simple navigation of the menus  
Power consumption: 15W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 233 x 165 x 200 mm  
Net weight: 1.9 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers

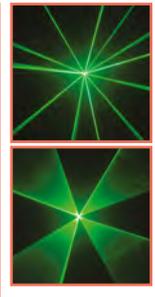

## SPACE-4 Laser

G: 40mW

Code : B04232



Green 40mW Class 3B compact laser  
Several modes are available:  
DMX mode: 1 or 8 channels  
Standalone mode: sound activated (via internal microphone) or automatic mode  
Infrared remote control included  
Master/Slave mode  
3-digit LED display for simple navigation of the menus  
Power consumption: 12W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 145 x 160 x 80 mm  
Net weight: 1.48 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers

# LASERS



## SMOOTH SCAN-3 Laser

140 mW - G: 100 mW - V: 40 mW

Code : B04226



## LASER INTERLOCK SWITCH

Emergency stop mushroom button for Laser

Code : B04210



## µ-QUANTUM Laser

180 mW - R: 100 mW - B: 80 mW

Code : B04228



Class 3B Laser based on one green 40mW 532nm laser and one red 100mW 650nm laser.  
Fluid movements, 80 motifs, numbers, designs, words, etc....  
Several modes are available:  
DMX mode: 1 or 17 channels  
Standalone mode: sound activated (via internal microphone) or automatic mode  
Infrared remote control included  
Master/Slave mode  
3-digit LED display for simple navigation of the menus  
Power consumption: 13W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 190 x 170 x 80 mm  
Net weight: 1.61 kg  
Meets EN/IEC 60825-1 Ed2, 2007-03 safety standards with respect to lasers

This emergency switch is additional safety for your laser projector.


Laser using one red 100mW 650nm laser and one blue 80mW 450nm laser  
Plug-and-Play: no controller necessary!  
Infrared remote control included  
Standalone mode with integrated microphone or automatic shows mode.  
Stroboscopic effect available  
Adjustable support and AC adaptor included.  
Power consumption: 5.7 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 117 x 92 x 46 mm  
Net weight: 0.64 kg  
Complies with EN/IEC 60825-1 Ed2, 2007-03 standards concerning Laser Safety



## µ-QUASAR Laser

140 mW - G: 40 mW - R: 100 mW

Code : B04225



## µ-STAR Laser

140 mW - G: 40 mW - R: 100 mW

Code : B04224



Laser using one red 100mW 650nm laser and one green 40mW 532nm laser  
Plug-and-Play: no controller necessary!  
Infrared remote control included  
Standalone mode with integrated microphone or automatic shows mode.  
Stroboscopic effect available  
Adjustable support and AC adaptor included.  
Power consumption: 5.7 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 117 x 92 x 46 mm  
Net weight: 0.64 kg  
Complies with EN/IEC 60825-1 Ed2, 2007-03 standards concerning Laser Safety

Laser using one red 100mW 650nm laser and one green 40mW 532nm laser  
Plug-and-Play: no controller necessary!  
Infrared remote control included  
Standalone mode with integrated microphone or automatic shows mode.  
Stroboscopic effect available  
Adjustable support and AC adaptor included.  
Power consumption: 5.7 W max.  
Power supply: AC 100/230V - 50/60Hz  
Dimensions: 117 x 92 x 46 mm  
Net weight: 0.64 kg  
Complies with EN/IEC 60825-1 Ed2, 2007-03 standards concerning Laser Safety



# STROBES



## BT-GIGAFLASH

Strobe LED with 9 separately controllable segments and a light output of +/- 100 000 lm.

Code : B04714



## BT-MAGICFLASH RGB

Colour LED strobe with 3 separately controllable segments and 324 RGB strobe LEDs

Code : B04717



## BT-MAGICFLASH

Powerful LED strobe with 9 separately controllable segments and a light output of +/- 35,000 lm.

Code : B04715



1260 4500°K LEDs source  
9 independent sections frequency from 0 to 30 Hz and Blinder mode  
Flicker free  
7 different DMX modes with 1 to 13 channels  
LCD display with drop-down menu  
Reflector shutters for more rendering  
DMX 3 and 5 XLR  
Powercon In and Out  
Forced and regulated ventilation  
Power supply: 240V/50Hz 900 W max  
Dimensions: 471 x 195 x 274 mm  
Weight: 8.5 kg

324 RGB LEDs source  
3 independent sections frequency from 0 to 30 Hz and Blinder mode  
Flicker free  
7 different DMX modes with 1 to 13 channels  
LCD display with drop-down menu  
DMX XLR 3  
Powercon In and Out  
Forced and regulated ventilation  
Power supply: 240V/50Hz 140 W max  
Dimensions: 336 x 126 x 212 mm  
Weight: 4.0 kg

324 4500°K LEDs source  
9 independent sections frequency from 0 to 30 Hz and Blinder mode  
Flicker free  
7 different DMX modes with 1 to 13 channels  
LCD display with drop-down menu  
DMX XLR 3  
Powercon In and Out  
Forced and regulated ventilation  
Power supply: 240V/50Hz 250 W max  
Dimensions: 336 x 126 x 212 mm  
Weight: 4.0 kg



## BT-STROBE 1500


A powerful 1,500 W professional strobe, 2 DMX channels with intense light output.

Code : B04713



1500W Xenon lamp source  
Variable frequency and effects  
Adjustment of speed and dimmer by potentiometer  
2 DMX channels (speed and dimmer)  
DMX XLR 3  
Input Jack for CA-8 controller  
Power supply: 240V/50Hz  
Dimensions: 458 x 147 x 116 mm  
Weight: 3.58 kg

# MIRROR BALLS

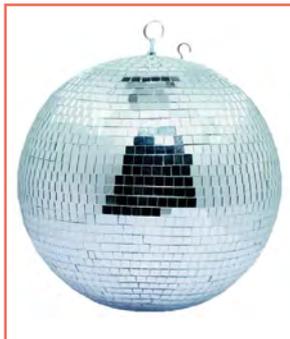

**MIRROR BALL 20/50 cm**  
Mirror ball 20"/50 cm

Code : B02026



**MIRROR BALL 16/40 cm**  
Mirror ball 16"/40 cm

Code : B02024



**MIRROR BALL 12/30 cm**  
Mirror ball 12"/30 cm

Code : B02023



**MIRROR BALL 8/20 cm**  
Mirror ball 8"/20 cm

Code : B02022



**MIRROR BALL 4/10 cm**  
Mirror ball 4"/10 cm

Code : B02027



**MB ROTATOR Heavy duty**  
Motor for mirror balls up to a weight of 10 kg

Code : B04123



**MB ROTATOR STANDARD**  
Mirror ball motor: 1.5 rpm.

Code : B02021



**MB ROTATOR BATTERY**  
Motor for mirror balls with a maximum diameter of 20 cm

Code : B02020



# CHROMATEQ®

Chromateq® offers innovative DMX lighting control solutions (lighting and multimedia) for professional architectural lighting and the entertainment world.


It is a solution adapted to all types of projects and for all sectors of activity: audio system, discos, theatres, concerts, live performances, LED installations, architectural lighting inside and outside, monuments, exhibitions and other services.



Windows  
macOS  
Linux

## LED PLAYER

Led Player is ideal for all DMX (architectural and entertainment) applications and fixed installations. It can control all standard DMX devices and can record a show in the interfaces. The LED Player is the easiest and most economical solution for DMX lighting control.

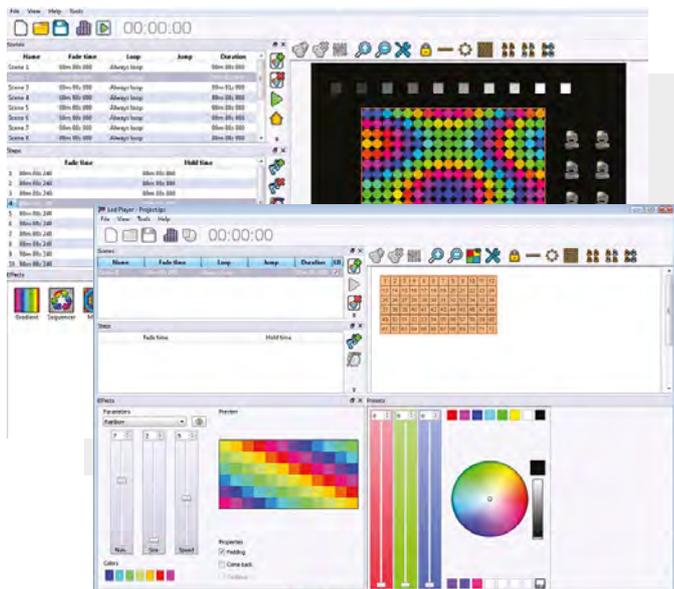


**LD-512WALL+**  
DMX wall controller.  
For CHROMATEQ software.

Code : B05016




**LD-1024WALL+**  
DMX Interface 1024ch/4MB, white, Chromateq softw.

Code : B05017




**LD-512BOX**  
512-channel DMX interface with remote control IR  
For CHROMATEQ software

Code : B05005




**LD-1024BOX**  
DMX interface with 1024 DMX channels.  
For CHROMATEQ software

Code : B05006



Wall interface compatible with the software " Chromateq Led Player " (provided)  
512 DMX channels  
4Mb internal memory expandable by SD card  
Activation by external contacts  
Access to 80 scenes by 8 buttons /10 pages  
Direct access to the interface : Trigger, Speed, Dimmer, Color  
Calendar function  
Merger Mode  
Operating System: Windows & MAC OSX & Linux  
DMX outputs on terminal block  
Power supply : By mini USB 5V or DC 9-36 V  
Art-Net Universe available: 1

Wall interface compatible with the software " Chromateq Led Player " (provided)  
1024 DMX channels  
4Mb internal memory expandable by SD card  
Activation by external contacts  
Access to 80 scenes by 8 buttons /10 pages  
5 zones: activate up to 5 programs simultaneously in stand-alone mode.  
Direct access to the interface : Trigger, Speed, Dimmer, Color  
Calendar function  
Merger Mode  
Operating System: Windows & MAC OSX & Linux  
DMX outputs on terminal block  
Power supply : By mini USB 5V or DC 9-36 V  
Art-Net Universe available: 2

Compact DMX interface  
Wall interface compatible with "Chromateq Led Player" software (supplied)  
IR remote control  
512 DMX channels  
256 channels in standalone  
Internal memory for max. 255 scenes  
IR remote control included for:  
Choice of scenes, speed, dimmer, BO  
Operating system: Windows & MAC OSX & Linux  
DMX outputs on XLR connectors  
Power supply: By mini USB 5V (cable supplied)  
Art-Net Universe available: 1

Standalone compact DMX interface  
Compatible with "Chromateq Led Player" and "Chromateq Pro DMX" software. (supplied)  
1024 DMX channels (2x512)  
132 channels in standalone  
Internal memory for max. 255 scenes  
IR receiver for optional remote control  
Operating system: Windows & MAC OSX & Linux  
DMX Inputs and Outputs on XLR and terminal block connectors.  
Power supply: By mini USB 5V (cable supplied)  
Art-Net Universe available: 2



## WI-LIGHT

The application can be used as a WIFI remote control with the LED Player software and LD-512WIFI interface. It can control all Live Board mode and standalone mode controls through a local WIFI connection. For smartphones and tablets.



**LD-512EASY+**  
512-channel DMX interface with 8 buttons.  
For CHROMATEQ software.

Code : B05012



**LD-1024EASY+**  
DMX Interface 1024ch/4MB, XLR, Chromateq softw.

Code : B05018



**LD-1024DIN**  
DMX interface 1024 channels in DIN rail format. For CHROMATEQ software

Code : B05013



Compact DMX interface  
"Chromateq Led Player" and "Chromateq Pro DMX". (supplied)  
512 DMX channels  
Internal memory for max. 255 scenes  
SD card slot for more memory  
Activation by external contacts  
Access to 80 programs by 8 buttons/10 pages  
Direct access to the interface:  
Trigger, Page, Colour, Speed, Dimmer  
Calendar function  
Splitter mode 2x512  
Operating system: Windows & MAC OSX & Linux  
DMX outputs on XLR connectors  
Power supply: By mini USB 5V or DC 9-36 V  
Art-Net Universe available: 1

Compact DMX interface  
"Chromateq Led Player" and "Chromateq Pro DMX". (supplied)  
1024 DMX channels  
Internal memory for max. 512 scenes  
SD card slot for more memory  
Activation by external contacts  
Access to 80 programs by 8 buttons/10 pages  
Direct access to the interface:  
Trigger, Page, Colour, Speed, Dimmer  
Calendar function  
Operating system: Windows & MAC OSX & Linux  
DMX outputs on XLR connectors  
Power supply: By mini USB 5V or DC 9-36 V  
5 zones: activate up to 5 programs simultaneously in stand-alone mode  
Art-Net Universe available: 2

Interface in DIN rail format  
1024 DMX channels  
Compatible with "Chromateq Led Player" and "Chromateq Pro DMX" software. (supplied)  
Internal 4MB memory for storing programs.  
Internal memory for max. 255 scenes  
Activation by external contacts or optional remote control  
Calendar function  
Splitter mode 2x512  
Merger mode  
Chaining in Master/Slave possible  
Operating system: Windows & MAC OSX & Linux  
DMX inputs and outputs on connectors.  
Power supply: By mini USB 5V or DC 9-36V  
Art-Net Universe available: 2



**LD-512KIT-IR**  
Infrared set for CHROMATEQ interfaces



Code : B05011



Infrared set including 2 wireless remotes and 1 IR receiver board that can be installed anywhere in the room. Remote controls can also be used with LD standalone interfaces already integrating an IR receiver.

## PRO DMX

Professional software for experienced users and the production of quality shows. Thanks to the Timeline, it is the indispensable controller for Live performances and synchronizations in Audio, Video and lighting. Pro DMX will animate and embellish all your artistic creations easily.

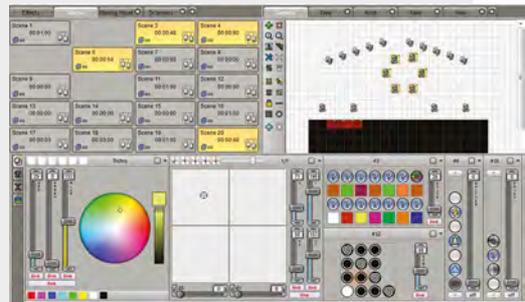

# SWEETLIGHT



Software available in several languages



- New version V9
- New skin
- Lightshow creator
- 3DView - New 3D engine
- etc



**SWEET D512S**  
DMX sweetlight 512ch DMX controller

---

Code : H10957

---



Compact interface in a metallic box  
512 DMX channels - Unlimited number of projectors  
Access to 3D and DMX modes simultaneously  
Thermal protection  
USB powered - USB Cable supplied  
Windows and MacOS compatible  
Standalone rendering of a 512-channel scene



**SWEET D1024**  
Sweetlight 1024 channel box

---

Code : H10956

---



**NEW**



**SWEET RACK1024**  
1024 channel standalone interface with infrared remote control

---

Code : H11015

---



With a computer

- Operating System: Win/Mac
- Communication: USB
- Number of DMX channels: 1024
- Number of Artnet channels: 1536

Stand-alone mode

- Number of DMX channels: 1024
- Number of scenes (dynamic): 16
- Number of zones: 4
- Triggers
  - 16 Flash buttons
  - Infrared remote control
  - 8 external contacts
- Date and time

With a computer



**SWEET NET512**  
Ethernet to dmx interface (Sweet light)

---


Code : H10958

---





Lightshow Creator

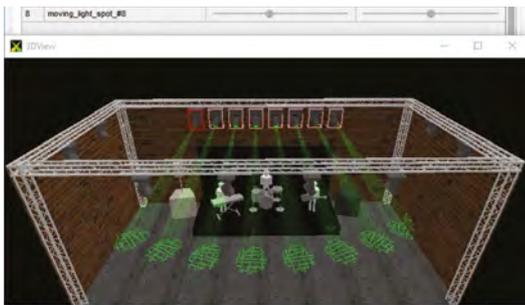

3DView – new 3D engine



Generator – individual pan & tilt offsets & zoom

## 1 - Lightshow Creator

Declare the fixtures and the groups of fixtures, and select the option « Lightshow Creator » in the main menu. The result is one tab per group of fixtures, with several buttons & pages for all channels, and master faders for dimmer and speed.

## 2 - 3DView – new 3D engine

3DView is using the application programming interface OpenGL version 3.2+, and it is now able to fully use the GPU of the video cards.

## 3 - Multi pan/tilt management (from Steps/Generator to 3DView)

Declare the number of the head in the window « Edit fixture ». Manage the pan/tilt channels like with 'single pan/tilt' fixtures.

## 4 - Live – slider «shift»

For Generator scenes, adjust the shift of a channel for all fixtures, like we do in the tab Generator with the fader « shift ».

## 5 - Generator – individual pan&tilt

### offsets&zoom

Adjust the position & size of the curve of each fixture, in the window « Generator fixtures settings ».

## 6 - Generator – fan pan / tilt

Fan the pan or/and tilt of the fixtures, with only two sliders in the window « Generator fixtures settings ».

## 7 - Live – BPM and Beat

Clear representation and improvements of the functions BPM and Beat.

## 8 - Live – Virtual DJ

Switch on/off Buttons in Live with VDJ PADS. Get the VDJ music Beats in Live.



	D512S	D1024	SWEET RACK1024	NET512
WITH COMPUTER				
operating system	Win/Mac	Win/Mac	Win/Mac	Win/Mac
communication	USB	USB	USB	USB
Dmx channels	512	2 x512	2 x 512	512
Channels Artnet (via computer)	1024	1536	1536	1024
Fmx protection ESD	ESD + GROUND LOOP	ESD + OPTICAL ISOLATIONS	ESD + DOUBLE OPTICAL ISOLATIONS	ESD + OPTICAL ISOLATIONS
power	USB POWERED	USB POWERED	USB POWERED	9V ADAPTOR (SUPPLIED)
STAND-ALONE MODE				
nb dmx channels	512	512	1024	512
nb (dynamic) scenes	1	1	16	9
nb zones	1	4	4	4
calendar			✓	✓
Software update	Free	Free	Free	Free
infrared remote control			YES (INCLUDED)	

# BT-NODE



## BT-NODE24

(5pin XLR) - Artnet node: 2x Artnet / 4x DMX in+ou

Code : B05015



GIGABIT Ethernet I/O with internal switch  
(link without latency)  
ARTNET 4.0 Protocol, sACN  
4x I/O DMX fully isolated: configurable as you wish!  
MIDI I/O: MIDI control via Ethernet!  
Configuration via the WEB interface  
RDM compatible  
NFC for use with smartphones  
Dual redundant power supplies :  
230Vac : TRUE-1 cascade sequence  
PoE class 2: Power over Ethernet  
Allowing to fix 2 units in 1U 19"



## BT-NODE24

(3pin XLR) - Artnet node: 2x Artnet / 4x DMX in+ou

Code : B05014



GIGABIT Ethernet I/O with internal switch  
(link without latency)  
ARTNET 4.0 Protocol, sACN  
4x I/O DMX fully isolated: configurable as you wish!  
MIDI I/O: MIDI control via Ethernet!  
Configuration via the WEB interface  
RDM compatible  
NFC for use with smartphones  
Dual redundant power supplies :  
230Vac : TRUE-1 cascade sequence  
PoE class 2: Power over Ethernet  
Allowing to fix 2 units in 1U 19"



# BT-NODE24

## Switch to speed of light



Responsive interface

# BT-NODE



## BT-NODE28

(3pin XLR) - Artnet node: 2x Artnet / 8x DMX in+ou

Code : B04638



The perfect all-in-one ArtNet NODE solution with 8 highly configurable XLR 3pin DMX ports.

The 8 DMX ports can all be configured as in or outputs:

Configured as input: normal or backup mode

Configured as output: single, LTP, HTP, RDM or zero mode

You can store all your personal settings and routing options to the different user memories.

Multiple pre-defined routing options available:

4 DMX inputs with 4 local clone

outputs DMX and ArtNet output

8 DMX outputs from ArtNet input,

with Backup line possibilities

Different merger combinations in

both directions:

Combine DMX in + ArNet universe

to Artnet or a physical DMX output

(LTP or HTP)

Combine 2 DMX inputs to ArtNet

(LTP or HTP)

Multiple mode DMX splitter modes:

One 1 to 7 splitter: 1 DMX input to 7

isolated DMX outputs

Two individual 2 to 3 splitters: each

with 1 DMX input to 3 isolated DMX

outputs

100% electrical isolation between all

in/outputs: problems on 1 port will

not influence the other ports.

Easy setup with OLED LCD display

Frame rate of each port can

be adapted from 10ms to 40ms

to increase compatibility while

connecting "slow" DMX-devices to

"fast" DMX-controllers.

Fully RDM compatible!



## BT-NODE28

(5pin XLR) - Artnet node: 2x Artnet / 8x DMX in+ou

Code : B04642



The perfect all-in-one ArtNet NODE solution with 8 highly configurable DMX ports.

The 8 DMX ports can all be configured as in or outputs:

Configured as input: normal or backup

mode

Configured as output: single, LTP, HTP,

RDM or zero mode

Multiple pre-defined routing options

(modes) available:

4 DMX inputs with 4 local clone outputs

DMX and ArtNet output

8 DMX outputs from ArtNet input, with

"Backup line" possibilities

Different merger combinations in both

directions:

Combine DMX in + ArNet universe to

Artnet or a physical DMX output (LTP

or HTP)

Combine 2 DMX inputs to ArtNet (LTP

or HTP)

Multiple mode DMX splitter modes:

One 1 to 7 splitter: 1 DMX input to 7

isolated DMX outputs

Two individual 1 to 3 splitters: each with 1

DMX input to 3 isolated DMX outputs

On top of the pre-defined modes you

can also store all your personal settings

and routing options to the different user

memories.

100% electrical isolation between all

in/outputs: problems on 1 port will not

influence the other ports.

Easy setup with OLED display

Frame rate of each port can be

adapted from 10ms to 40ms to increase

compatibility while connecting "slow"

DMX-devices to "fast" DMX-controllers.

RDM compatible!

All DMX ports are equipped with 5pin

XLR-connectors (3pin XLR-version

available)

Two 10/100Mbps Ethernet ports (Neutrik

RJ45 Ethercon connectors)

To increase reliability the built-in

Ethernet switch has an automatic

bypass function to make sure that the

network stays fully operational in case of

hardware failure.

## BT-NODE24

- Web interface accessible with smartphones via NFC
- 2 Gigabit ports without latency
- PoE
- MIDI I/O



# DMX CONTROLLERS



## EZ-CON 6

6 channels DMX controller

Code : B05024



The controller sends out 6 DMX channels.  
There is NO external power adapter  
It's compact size light weight makes it an easy to build in or transport controller.  
Power Input: AC 110-240V, 50/60Hz  
DMX output: 3pin XLR, 6ch.  
Size: 180 x 135 x 55 mm  
Weight: 0.9 kg



## EZ-CON 24W

24 channels DMX controller with battery and wireless DMX

Code : B05023



24 DMX channels over 8 faders and 3 pages  
Over 10 hours of autonomy with a full charged battery.  
Wireless DMX by means of a W-DMX G4 module from Wireless Solutions Sweden .  
Wireless and wired DMX output can work simultaneously.  
No external power adapters thanks to the built in power supply  
Power Input: AC 110-240V, 50/60Hz  
DMX output: 3pin XLR, 24ch  
DMX wireless: 2.4GHz  
Size: 231 x 158 x 59 mm  
Weight: 1.41 kg



## EZ-CON 72

72 channels DMX controller with 6 chases of 40 steps

Code : B05025



72 DMX channels over 8 faders and 9 pages.  
6 chases of 40 steps (scenes) each can be programmed.  
Adjustable speed for the chases.  
No external power adapters thanks to the built in power supply  
Power Input: AC 110-240V, 50/60Hz  
DMX output: 3pin XLR female  
Size: 232 x 135 x 55 mm  
Weight: 1.12 kg



## MEMORY-24

24-channel DMX console for power blocks

Code : H9067



Organ playing with 2 courses of 12 circuits or 1 course of 24 circuits  
4,600 memories and 48 programmable sequences  
Crossfade  
Adjustable speed and rise time of sequences  
Sound mode  
Backup memories internally  
Possibility of mixing several sequences  
Manual triggering by Tap synchro  
Triggering scenes and sequences in MIDI  
DMX 512 output on 3-pin XLR plug  
External power supply (DC 9 V - 12 V, 500 mA)  
Dimensions: 483 x 265 x 90mm  
Weight: 4.6 kg



## PILOT-192PRO

192-channel DMX controller with joystick

Code : H9073



192 channels (12 projectors of 16 channels)  
30 banks of 8 programs each  
12 chases (240 steps per chase)  
Pan/Tilt  
Fade Time  
MIDI control of memories and blackout  
Assignable joystick for Pan/Tilt movements  
Connection for foot control and smoke machine  
Sound mode  
Dimensions: 483 x 82 x 135 mm  
Weight: 2.2 kg



## SCM-1 SCENEMASTER

16 DMX channels with MIDI output

Code : B04624



64 channels (4 projectors of 16 channels)  
16 scenes of 16 channels  
MIDI control of faders and flashes  
Midi In controls scenes with compatible software  
16 buttons for flashes or scenes  
Dimensions: 483 x 85 x 133 mm  
Weight: 2.5 kg



## MANU-6X

DMX 6 channels + master controller

Code : H9064



6-channel DMX console  
6 faders + Master  
Operates on 9 V battery  
Supplied AC adapter  
Ideal for the control of architectural colour changers  
DMX output: 3-pin XLR  
Dimensions: 173 x 153 x 55 mm  
Weight: 0.8 kg



## CONTROLLER CASE 3U

Compact flight case for all kinds of small 19" controllers

Code : B03224



Compact flight case for controllers 19" up to 3U  
Accessory compartment  
Rubber feet

# LED DMX CONTROLLERS



## LEDCON-XL

Preprogrammed controller

Code : B04661



Controller for LED projectors  
8 groups of spotlights with patchable DMX mode  
Activate colors, fade and Pre-programmed chases.  
8 additional cursors for manual control of other devices (smoke machine, etc.)  
4- or 8-channel modulators with speed control or sound mode  
Choice of RGB, white RGB, amber white RGB modes, etc.  
UV button for 6-in-1 LED projectors that include a UV LED.  
Separate control for strobe and dimmer.  
Instant access to 9 preprogrammed colour chasers  
Static or audio chaser mode 32-colour spectral blend.  
Dimensions: 483 x 75 x 133 mm  
Weight: 2.2 kg



## PILOT-8

Programmable 8x8 channels controller

Code : H10126



64 patchable channels (8 projectors with 8 channels each)  
8 colours recorded and 24 free  
8 pre-programmed colours and 24 free  
Assignable patch for RGBWA and dimmer functions  
2 assignable free channels  
Strobe function  
Adjustable sequence speed  
Connectors:  
- DMX output on XLR  
- RJ45 for DMX control of the Contest Architecture range using the PILOT  
- Jack for external controller Easy-2 for launching programs, choice of colours and Blackout  
- USB for the night light supplied  
Dimensions: 400 x 200 x 68 mm  
Weight: 2.3 kg



## PARCONTROL34

RGB and RGBW compatible DMX controller

Code : H9913



Control of colour, prog, strobe.  
Direct access to 12 colours and 3 shades of whites  
RGBW colour graduation  
Audio mode  
Strobe speed  
2 control modes  
Mode 1: R, G, B, Dim/Strobe, White  
Mode 2: R, G, B, White  
Power supply: DC 9-12V 300mA  
Dimensions: 270 x 170 x 60 mm  
Weight: 1.1 Kg



## LEDCON-02 Mk2

Small pre-programmed LED controller

Code : B04660



Control of colour, prog, strobe.  
Direct access to 9 colours  
Faders for chasers, speed and Dimmer  
Audio mode  
Fixed patch R,G,B, Dimmer/Strobe  
Works in 4 or 8 channel mode  
Power supply: DC 9-12V 300mA  
Dimensions: 210 x 140 x 46 mm  
Weight: 1 Kg



## PARCONTROL

DMX controller for RGB projector

Code : H9406



Control of colour, prog, strobe.  
Direct access to 9 colours  
RGB colour graduation  
Audio mode  
Strobe speed  
Fixed patch R, G, B, Dimmer/Strobe.  
Power supply: DC 9-12V 300mA  
Dimensions: 220 x 140 x 36 mm  
Weight: 1 Kg



## PARPILOT

DMX control box for PAR LEDs CONTEST and LED4STAGE

Code : H9658



Control of colour, prog, strobe.  
2 control modes: Fixed colour and running light  
Fixed patch R,G,B, Dimmer/Strobe  
Works in 4 or 16 DMX channels  
10 pre-memorized internal programs  
Musical Mode, Tap Tempo and Colour Variation  
Quick access to 8 fixed colours  
Management of scroll speed and intensity  
Strobe effect  
Net or progressive colour chaining  
Blackout  
Power supply: DC 12 V 100 mA (supplied)  
Dimensions: 70 x 110 x 33 mm  
Weight: 0.31 kg

# DMX RECORDER



Recorded shows can easily be saved on a USB memory stick.

2 modes:

- **[User mode]:** the [DMX RECORDER] can only play recorded chases/shows. Other functions are disabled
- **[System mode]:** full control over all the functions of the [DMX RECORDER]

Recorded shows/chases can run at a fixed speed or via audio control. (external audio signal or build in microphone)

Blackout function to cut the DMX output.

2x8 digit display for easy navigation in the menu.

**NEW**

**DMX RECORDER**  
512ch DMX recorder

---

Code : B05020

---

**NEW**

**DMX RECORDER REMOTE**  
Remote controller for DMX Recorder

---

Code : B05021

---

Wired remote control for the JB Systems® [DMX RECORDER]. Ideal, easy to use, remote control for pubs and bars. Easy cleaning glass surface. Three control buttons for simplified control of the recorded chases(s):

- [PLAY]
- [STOP]
- [BLACKOUT]

Eight chase buttons for quick selection of the desired show. Wired remote control for the JB Systems® [DMX RECORDER].

# DMX SPLITTERS



**DMS-26**  
The perfect all-in-one solution for securing your DMX installations: MERGER + SPLITTER + BOOSTER.

Code : B04625



**SPLITTER:**  
100% electrical insulation  
2 inputs and 6 DMX outputs  
**BOOSTER:**  
signal reconstruction  
**MERGER:**  
Mixer:  
HTP: Priority to the highest value  
Backup: if signal A is faulty then relay on signal B  
Priority channel address per input.  
DMX speed 23 ms to 45 ms.  
Signal loss setting:  
Null , Hold , Clear  
4-character LED display.  
Dimensions: 482 x150 x 44 mm  
Weight: 2.9 kg



**DS 12**  
PRO splitter DMX+IEC 1in/2out

Code : B04631



**SPLITTER:**  
100% electrical insulation  
1 input and 2 DMX outputs  
**BOOSTER:** boost the signal  
Bidirectional RDM compatible  
Inputs:  
DMX 3 and 5 XLR  
IEC 10A  
Outputs:  
2 DMX XLR3  
2 IEC 10A  
Dimensions: 130 x132 x 56 mm  
Weight: 0.95 kg



**MINI DMX-SPLITTER**  
Mini DMX splitter 1in/2out

Code : B04630



**SPLITTER:**  
1 input and 2 DMX outputs  
**BOOSTER:** boost the signal  
Inputs:  
DMX XLR 3  
Outputs:  
2 DMX XLR3  
Dimensions: 102 x 72 x 40 mm  
Weight: 0.24 kg

## DMS-26

The perfect all-in-one solution to secure your installations.



The perfect all-in-one solution to secure your DMX-installations: MERGER + SPLITTER + BOOSTER

100% electrical isolation between all in/outputs!  
2 DMX-inputs + 6 DMX-outputs, each equipped with 3pin and 5pin XLR-connectors.

The booster function analyses the incoming DMX-signal and builds it back up from scratch to make it perfect for further use.

The merger function combines 2 DMX-signals in different ways:

**HTP:** the highest value of 2 identical channels from 2 DMX-signals will have priority.

**Backup:** when the DMX-signal on input A fails, the DMX-signal in input B takes over immediately.

**Merger:** DMX-signals from 2 different controllers can be combined and send over 1 cable, you can choose the start

address of the second controller.

The splitter function distributes the DMX-signal(s) from the input(s) over 6 identical outputs that are 100% isolated from each other: problems that occur on 1 output will not influence the other outputs!

The timing of the DMX-outputs can be adapted from 23ms to 45ms, increasing compatibility while connecting "slow» DMX-devices to "fast» DMX-controllers.

Output behavior can be selected when suddenly both DMX-inputs fail:

**Null:** no DMX signal on the outputs

**Hold:** keep the last DMX values on the outputs.

**Clear:** set the DMX values on all outputs to zero.

Easy setup via 4digit LED display



# WIRELESS DMX

NEW



## AirBoxIP

IP65 wireless DMX transceiver IP65

Code : H11032



Wireless airDMX transmitter and receiver via WiFi at 7 frequencies  
Average range 100 m in the open area \*.  
Frequency band 2,400-2,483GHz ISM  
512-channel DMX  
Channel selection key with tricolour indicator light  
Choice of 7 different channels to make groups of projectors  
Power supply: AC 100/240 V - 50/60 Hz  
Supplied with mounting brackets, IP/ XLR DMX IN/OUT cables and IP/AC IN cable.



## airBOX-ER1

Wireless DMX transmitter and receiver box of 512 DMX channels and 7 WiFi frequencies

Code : H9966



Wireless airDMX transmitter and receiver via WiFi at 7 frequencies  
- ISM 2,400-2,483GHz frequency band  
Channel selection button with tricolour LED  
Choice of 7 different channels to make groups of projectors  
Power supply:  
- AC 100/240 V - 50/60 Hz  
Input and output power  
DMX input and output on XLR3  
Maximum transmission power:  
20 dBm/100 mW  
Removable bracket for hanging on structures and wall attachment  
Dimensions: 165 x 120 x 53 mm  
Net weight: 0.5 kg



## M-DMX TRANSCEIVER

Wireless DMX! Compatible with WTR-DMX DONGLE.

Code : B04646



Transceiver can operate in transmitter or receiver mode  
- 2.4 GHz frequency band  
Compatible with the "Wireless Solution" W-DMX™ Protocol  
Works perfectly with Briteq WR-DMXG4 [4632] in WT-DMXG4 [4633]  
5V DC power supply via micro USB or adapter included  
DMX input and output on XLR3  
Dimensions: 103 x 76 x 36 mm  
Net weight: 0.250 kg



## WTR-DMX DONGLE

The perfect solution for anyone looking for an extremely reliable wireless DMX!

Code : B04645



Transceiver can operate in transmitter or receiver mode  
- 2.4 GHz frequency band  
Compatible with the "Wireless Solution" W-DMX™ Protocol  
Works perfectly with Briteq WR-DMXG4 [4632] in WT-DMXG4 [4633]  
5V DC power supply via USB port  
DMX connection via USB port  
Dimensions: 71 x 42 x 11 mm  
Net weight: 0.02 kg



### Unrestrained control even outdoors (IP65)

Receive and transmit 512 DMX channels via Wi-Fi on 7 frequencies.

The AirBoxIP allow you to transmit or receive the airDMX signal. As soon as it detects an incoming DMX wired signal the AirBoxIP automatically transmits it as a Wi-Fi DMX signal.

The removable attachment system allows you to easily install the AirBoxIP on a wall or on any suitable structure.

The power socket can be used to link the AirBoxIP to other DMX projectors.

# UPDATERS

**NEW**



**FIRMWARE UPDATER 2+**

Code : B05019



This unit can be used to easily upgrade the firmware of compatible DMX-effects & projectors.  
 One or more DMX-effects can be upgraded simultaneously through their DMX-in/out connections.  
 RDM functionality: check several functions + change DMX-address / DMX-channel mode.  
 DMX-controller:  
 Mini-USB input to recharge the internal battery.  
 Output: XLR 3pin  
 USB/micro SD-card adapter + mini-USB cable + micro SD-card included.



**FIRMWARE UPDATER**

This device allows you to do firmware updates on DMX projectors and light effects.

Code : B04319



Firmware update box for compatible devices.  
 Works with the software that allows you to load the program via the USB port.  
 Possible to update multiple devices in one time.  
 Check the compatibility of your device.



**FIRMWARE UPDATER 3**

Firmware update cable

Code : B04389



Firmware update cable for compatible devices.  
 Works with the software that allows you to load the program via the USB port.  
 Possible to update multiple devices in one time.  
 Check the compatibility of your device.

# SPECIFIC REMOTES



**CA-8**

Remote compatible with most lighting effects

Code : B04192



Colour/gobo control of programs and of Blackout.  
 Connectivity: 6.35 stereo jack  
 Cable length: 11 m



**BT-STR4**

4-channel controller for strobes.

Code : B04712



Strobe controller  
 Analog outputs and DMX (2-channel)  
 Manual or automatic operation 10 different programs  
 Single flash, Full on / Blinder, Blackout  
 Adjustable speed  
 Dimmer (only in DMX)  
 Audio mode  
 Compatible with analog strobes using 12V DC pulses such as: MEGA STROBE 1500, ...  
 Compatible with DMX strobes using 2 channels such as: MEGA STROBE 1500 DMX, BT-STROBE 3000, ...



# DIMMER PACKS



## BT-626/FRA

6-channel professional Dimmer/Switch pack for rack mounting 19".

Code : B04634



## BT-626/GER

6-channel professional Dimmer/Switch pack for rack mounting 19".

Code : B04635



Power rating: 16 A (3500 W) per channel / 96 A max. resistive/inductive  
 Protection of each channel by circuit breaker  
 LEDs indicating charge presence on each channel  
 Independent addressing of each channel  
 6 linear potentiometers for manual dimming  
 Preheat control of lamps from 0 to 6%  
 LED display to monitor all functions, including internal temperature  
 Power supply: single-phase or three-phase on terminal blocks (230 V - 50 Hz)  
 6 16A French plug outputs on the back  
 DMX XLR 3 and RJ11 input and output  
 0/10V input on DB9  
 Dimensions: 482 x 312 x 90  
 Weight: 8 kg

Same as BT-626/FRA but with outputs on 6 standard German plugs.



## DIM-1X10

1-channel 1x10A DMX block with PC output fader

Code : H9061



## DIM-4X5

4-channel 4 x 5A compact DMX block with faders

Code : H9057



Power rating: 10 A (2200W) resistive/inductive  
 Linear potentiometers for manual dimming  
 Cable length of the remote fader: 1.8 m  
 LED display with drop-down menu  
 DMX input/output on 3-pin XLR plugs  
 Output on French plug  
 Power supply: AC 230 V, 50 / 60 hz  
 Dimensions: 150 x 125 x 82 mm  
 Weight: 1.5 kg

Power rating: 5 A (1100 W) per channel / 16 A max. resistive/inductive  
 16 internal chase programs with variable speed  
 Individual fader per channel, with speed adjustment  
 4 DMX channels with independent assignment in DMX 512  
 Modes: Master/slave, program, DMX, sound via build-in microphone.  
 Switch/dimmer pack  
 Control of 4 DMX channels via faders  
 Outputs on 4 French mains plugs  
 Power supply: AC 120 V / 230 V - 50 / 60 Hz, 16 A maximum  
 Dimensions: 250 x 208 x 68 mm  
 Weight: 2.5 kg

# DIMMER PACKS



## DSP-4 Mk2 /F

Multifunctional dimmer/switch pack with 4 sockets (French Schuko).

Code : B04643



## DSP-4 Mk2 /G

Multifunctional dimmer/switch pack with 4 sockets (German Schuko).

Code : B04644



## DSP-4 MK2

Suitable for low power LED loads. Minimum load from 10 W / channel

Power rating: 8 A (1850 W) per channel / 15 A max. resistive/inductive  
Protection of each channel by fuse  
Independent addressing of each channel  
LED display with drop-down menu  
Power supply: 240V - 50Hz single phase  
4 16A French plug outputs on the front  
DMX XLR 3 input and output  
Dimensions: 482 x 100 x 88  
Weight: 2.9 kg

identical to the DSP-4 MK2 but with outputs on 4 standard German plugs.



DSP-4 compatible with «TRIAC» compatible «LED» projectors



# ELECTRICAL DISTRIBUTION



## PD-63SH/FRA-BEL

Distributor 63A Tetra / 12x16A Mono + 2x 16PIN + 2x19PIN + 1 CEE 63A output.

Code : B04647



1 x 63A 4-pole circuit breaker (3P+N) for protection of all outputs, including 63A output  
 1 x 30 mA 63A differential circuit breaker for the protection of persons  
 12 x bipolar circuit breakers for 12 16A standard French outlets (4 outlets per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 63A plug  
 1 x CEE 63A output connector  
 2 x 16-pin harting type connector  
 2 x 19 pin socapex type connector  
 Dimensions: 482 x 266 x 326 mm  
 Rackable 19" height 6U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 11.74 kg



## PD-63SH/GERMAN

Distributor 63A Tetra / 12x16A Mono + 2x 16PIN + 2x19PIN + 1 CEE 63A output.

Code : B04648



1 x 63A 4-pole circuit breaker (3P+N) for protection of all outputs, including 63A output  
 1 x 30 mA 63A differential circuit breaker for the protection of persons  
 12 x bipolar circuit breakers for 12 16A standard German outlets (4 outlets per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 63A plug  
 1 x CEE 63A output connector  
 2 x 16-pin harting type connector  
 2 x 19 pin socapex type connector  
 Dimensions: 482 x 266 x 326 mm  
 Rackable 19" height 6U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 11.74 kg



## PD-63A Mk2/FRA-BEL

Distributor 63A Tetra / 2 x outputs CEE 32A + 3 x 16A Mono.

Code : B04639



1 x 30 mA 63A differential circuit breaker for the protection of persons  
 2 x 32A 4-pole circuit breakers (3P+N) for the protection of two P17 32A outputs  
 3 x bipolar circuit breakers for 3 16A standard French outlets (1 outlet per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 63A plug  
 2 x CEE 32A output connectors  
 Dimensions: 482 x 274 x 152 mm  
 Rackable 19" height 3U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 11.74 kg



## PD-63A Mk2/GER-NL

Distributor 63A Tetra / 2 x outputs CEE 32A + 3 x 16A Mono.

Code : B04640



1 x 30 mA 63A differential circuit breaker for the protection of persons  
 2 x 32A 4-pole circuit breakers (3P+N) for the protection of two P17 32A outputs  
 3 x bipolar circuit breakers for 3 16A standard German outlets (1 outlet per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 63A plug  
 2 x CEE 32A output connectors  
 Dimensions: 482 x 274 x 152 mm  
 Rackable 19" height 3U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 11.74 kg

# ELECTRICAL DISTRIBUTION



## PD-32SH/FRA-BEL

Distributor 32A Tetra / 6 x 16A Mono + 1 x 16PIN + 1x19PIN + 1 x CEE 32A output.

Code : B04636



1 x 30 mA 32A differential circuit breaker for the protection of people  
 1 x 32A 4-pole circuit breaker (3P+N) for protection of all outputs, including the 32A output  
 6 x bipolar circuit breakers for 6 16A standard French outlets (2 outlets per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 32A plug  
 1 x CEE 32A output connector  
 2 x 16-pin harting type connector  
 2 x 19 pin socapex type connector  
 Dimensions: 482 x 258 x 152 mm  
 Rackable 19" height 3U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 8.78 kg



## PD-32SH/GERMAN

Distributor 32A Tetra / 6 x 16A Mono + 1 x 16PIN + 1x19PIN + 1 x CEE 32A output.

Code : B04637



1 x 30 mA 32A differential circuit breaker for the protection of people  
 1 x 32A 4-pole circuit breaker (3P+N) for protection of all outputs, including the 32A output  
 6 x bipolar circuit breakers for 6 16A standard German outlets (2 outlets per phase)  
 V-meters + A-meters per phase  
 1.5 m mains input cable with CEE 32A plug  
 1 x CEE 32A output connector  
 2 x 16-pin harting type connector  
 2 x 19 pin socapex type connector  
 Dimensions: 482 x 258 x 152 mm  
 Rackable 19" height 3U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 8.78 kg



## BREAK-3X16

3x16A power supply block on 6 outlets with vu-meter

Code : H9059



3 x bipolar circuit breakers for 6 16A standard French outlets (2 outlet per phase)  
 V-meters + A-meters per phase  
 1 x CEE 16A input connector  
 1 x 16A socket in front on phase 1  
 Dimensions: 482 x 260 x 152 mm  
 Rackable 19" height 2U  
 Power supply: 400V - 50 Hz (3P+N+E)  
 Weight: 3.8 kg



# ELECTRICAL DISTRIBUTION



## DIST3x2F

TRI 1xCEE16A distributor - 3x2 French outlets

Code : H10838



Rackable distributor 19" height 1U  
Power input cable in 5G1.5mm<sup>2</sup> with a length of 2 m + Tetra CEE 16A plug  
6 16A standard French sockets on the front (2 outlets per phase)  
Weight: 1.1 Kg



## DIST3x2E

TRI 1xCEE16A distributor - 3x2 European outlets

Code : H10839



Rackable distributor 19" height 1U  
Power input cable in 5G1.5mm<sup>2</sup> with a length of 2 m + Tetra CEE 16A plug  
6 16A standard German sockets on the front (2 outlets per phase)  
Weight: 1.1 Kg



## DIST-CUBE

Tri 1xCEE16A distributor / 3 x European outlets

Code : H10868



Cube format distributor  
2 M10inserts  
Tetra CEE 16A input plug  
3 16A standard German plugs (1 outlet per phase)  
Dimensions: 160 x 136 x 102 mm  
Weight: 0.86 Kg



## PC-8 Mk2 FRA/BEL

8-channel dispatch with bipolar switches

Code : B02049



Outputs on 8 IP54 outlets  
Standard French plugs  
8 bipolar switches  
6.3 amp fuse for each channel  
the total charge cannot exceed 15 amps (3300 W)  
Rackable 19 inches / 2U  
Dimensions: 483 x 80 x 97 mm  
Power supply: 230V - 50 Hz  
Weight: 2 kg



## PC-8 Mk2 GER

8-channel dispatch with bipolar switches

Code : B02059



Outputs on 8 IP54 outlets  
Standard German plugs  
8 bipolar switches  
6.3 amp fuse for each channel  
the total charge cannot exceed 15 amps (3300 W)  
Rackable 19 inches / 2U  
Dimensions: 483 x 80 x 97 mm  
Power supply: 230V - 50 Hz  
Weight: 2 kg



## RG2x8

1U double-sided rackable strip, 2x8 European plugs

Code : H10837



1U rackable 19" strip with:  
8 sockets in front / 16A protection  
8 sockets at the rear / 16A protection  
2 front bipolar switches to control front outlets and rear outlets  
Standard German plugs with child protection  
3G1.5mm<sup>2</sup> cable - length 2m  
Dimensions: 483 x 46 x 90 mm  
Power supply: 230V - 50 Hz  
Weight: 1.33 kg



## RG8USB

1U rackable strip, 8 European plugs + 2xUSB

Code : H10840



1U rackable 19" strip with:  
8 sockets on the back  
2 USB ports (1A) on the front  
1 bipolar switch on the front panel to control the outlets  
Standard German plugs with child protection  
3G1.5mm<sup>2</sup> cable - length 2m  
Dimensions: 483 x 46 x 90 mm  
Power supply: 230V - 50 Hz  
Weight: 1 kg

# LIFTING CONTROL



## RICO-V8

8-channel chain lift motor controllers with separate UP / DOWN buttons and master / slave function.

Code : B07000



Standalone controller for chain lift motors. Control up to 8 motors independently. Compatible with the RICO-V4 model. Multiple units can be connected as master/slave. Simultaneous control of the hoists using the UP/DOWN buttons on the master controller. Emergency stop. "Slave" LED indicator light. Manual phase inversion switch for each output. Choice of different outputs: 4 16 A outputs, 4 individual CEE poles. 2x 16-pin connectors, Harting® type. 2x 19-pin connectors, Socapex® type. 1x PowerCON 16 A power outlet. XLR input for the remote control [RICO-REMOTE] (optional). Phase indicators available. A 4-pole 32A circuit breaker protects ALL outlets, including the 32A output to the next unit in the chain. In case of emergency, all the phases AND the neutral are disconnected. 2x C16 bipolar automatic circuit breakers (16 A - 1P+N) for the protection of circuits + auxiliary output. AC input cable (3 x 32 A, 5 wires), equipped with CEE 32 A input socket (3P+N+T). Output connector bypass (3 x 32 A, 5 wires) of EEC type (3P+N+T) (19 inches)/4 U rugged metallic box. Designed and manufactured in Europe. Dimensions: 482 x 184 x 430 mm. Power supply: 400V - 50 Hz (3P+N+E). Weight: 13.5 kg.



## RICO-V4

4-channel chain lift motor controllers with separate UP / DOWN buttons and master / slave function.

Code : B04649



Standalone controller for chain lift motors. Control up to 4 motors independently. Multiple units can be connected as master/slave. Simultaneous control of the hoists using the UP/DOWN buttons on the master controller. Emergency stop. "Slave" LED indicator light. Manual phase inversion switch for each output. Choice of different outputs: 4 16 A outputs, 4 individual CEE poles. 1x 16-pin connectors, Harting® type. 1x 19-pin connectors, Socapex® type. 1x PowerCON 16 A power outlet. XLR input for the remote control [RICO-REMOTE] (optional). Phase indicators available. A 4-pole 32A circuit breaker protects ALL outlets, including the 32A output to the next unit in the chain. In case of emergency, all the phases AND the neutral are disconnected. 2x C16 bipolar automatic circuit breakers (16 A - 1P+N) for the protection of circuits + auxiliary output. AC input cable (3 x 32 A, 5 wires), equipped with CEE 32 A input socket (3P+N+T). Output connector bypass (3 x 32 A, 5 wires) of EEC type (3P+N+T) (19 inches)/4 U rugged metallic box. Designed and manufactured in Europe. Dimensions: 482 x 184 x 430 mm. Power supply: 400V - 50 Hz (3P+N+E). Weight: 13.5 kg.




## RICO-REMOTE

Remote control for RICO-V4 and RICO-V8

Code : B04650




Equipped with:  
2 UP / DOWN buttons  
1 backlit emergency stop button  
1 6.5m cable (XLR 5pin male / female)

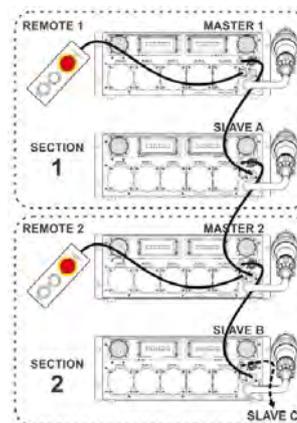



# EFFECT MACHINES

LOW FOG MACHINES  
GEYSER MACHINES  
SNOW MACHINES  
FAZER MACHINES  
SMOKE MACHINES  
BUBBLES MACHINES  
FIREMAN SMOKE MACHINE  
FAN  
PERFUMES AND LIQUIDS

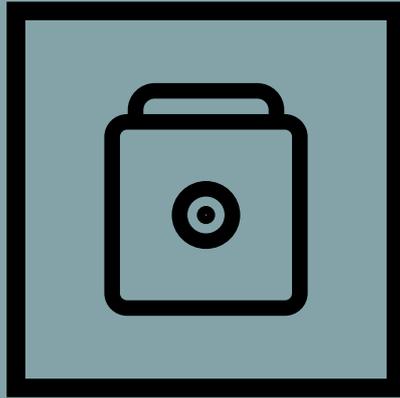

# LOW FOG MACHINES



## BT-H2FOG

### Low Fog machine without restriction

1500W Low Fog machine in flightcase producing heavy smoke thanks to ultrasonic technology that is much less restrictive than dry ice and just as efficient.

Easy to use: it only needs tap water (demineralized water is recommended) and smoke liquid.

The «Click-on» system allows quick assembly and disassembly of the diffuser.

**NEW**



**BT-H2FOG II**  
Ultrasonic 1500W Low Fog machine in flight case

---

Code : B04899

---



The black hose is equipped with a "fast click-on" system to significantly reduce installation time!  
The included metal nozzle ensures a better distribution of the low fog.  
Adjustable fog output and fan speed: Via 2 DMX channels  
Via the on board control panel with LCD-display and timer  
Compatible wireless DMX: just plug-in an optional WTR-DMX DONGLE !  
[Briteq® code: B04645]  
Original Neutrik® PowerCON and 3-pin DMX connectors for input and output  
Strong flight case, equipped with recessed flip handles and 4 soft rubber casters with brakes.

**Recommended liquid :**  
**BT-LOWFOG LIQUID 5L (B04854)**

**NEW**



**BT-H2FOG COMPACT**  
Ultrasonic 1250W Low Fog machine

---

Code : B04900

---



Ultrasonic 1250W Low Fog machine.  
The powerful ultrasonic element convert the combination of smoke fluid and distilled water into a large amount of beautiful low-lying fog.  
No more hassle with expensive and hard to find CO2 dry ice ! The black hose is equipped with a "fast click-on" system to significantly reduce installation time!  
Adjustable fog output and fan speed: Via 2 DMX channels  
Via the on board control panel with LCD-display and timer  
Stainless steel "304" water tank (instead of ordinary treated iron) to avoid rust!  
Prepared for wireless DMX: just plug-in an optional WTR-DMX DONGLE !  
[Briteq® code: 4645]  
Original Neutrik® PowerCON and 3-pin DMX connectors for input and output

**Recommended liquid :**  
**BT-LOWFOG LIQUID 5L (B04854)**



BT-H2FOG II

# GEYSER MACHINES



**NEW**

## M-7X

1500 Watt, incl. RGBA LED effect

Code : B04853



Neutrik TRUE 1 Connector  
RGBA LEDs on board.  
Optional Wireless DMX available.  
New structure design for multiple angle rigging  
Auto-sensing frequency  
Fluid tank compartment for ease of transportation  
Huge output volume with high pigments LED colors  
Great fit for Stage purpose  
Generate fog at any orientation

**Recommended liquid :**  
**FLC-5 (B04834)**



## COLOR JET

Powerful vertical jet smoke machine with 6 3 W RGB LEDs

Code : B04892



Light source: 6x3W RGB LEDs  
Heating element: 900W  
Preheating time: 4 minutes  
Tank: 2.5 litres  
HF remote with 4 programmable buttons  
DMX mode: 4 channels  
Power supply: 230V - 50Hz  
Power consumption: 950W max.  
Dimensions: 340 x 250 x 130 mm  
Net weight: 5.5 kg

**Recommended liquid :**  
**FLC-5 (B04834)**

# SNOW MACHINES



## S-500

Professional snow machine, controlled by DMX and set up in a flight case.

Code : B04848



## PM-1

Horizontal movement motor for ANTARI S-500 snow machine.

Code : B04849



## YETI Mk2

Snow machine with DMX control

Code : B04896



DMX-controlled air volume and liquid flow  
Tank: 20 litres  
Max. consumption: 400 ml/min at 100%  
Effect output equipped with a 10m air hose.  
Control panel: LCD display  
Volume and Timer Mode  
Integrated DMX wireless receiver:  
DMX mode: 2 channels  
Horizontal movement motor PM-1 (120°)  
optional  
Power supply: 230V - 50Hz  
Power consumption: 890W max.  
Dimensions: 592 x 551 x 651 mm  
Net weight: 37.2 kg

**Recommended liquid :**  
**SL-5H (B04852)**

Horizontal movement motor (120°)  
Compatible with S-500

Mains power input: 230 V AC, 50 Hz  
Power consumption: 1200 W  
DMX connectors: 3-pin XLR input + output  
Number of DMX channels: 1  
Fuse: T 8 A/250 V (slow-blow 6 x 30 mm)  
Tank capacity: 5l  
Dimensions: 530 x 260 x 320 mm (without suspension bracket)  
Weight: 8.70 kg

**Recommended liquid :**  
**SNOW LIQUID 5L (B04813)**

# HAZER & FAZER MACHINES



**HZ-1000**  
Hazer machine

Code : B04861



The maximum haze output is HZ-500's double.  
Two operational modes: Single-Compressor or Twin-Compressor mode can be selected to create needed haze volume.  
Equipped with TFT color Touch Panel provides simple control interface.  
Flight case with wheels gives better protections for tours.  
Internal turbo fan enables haze to go higher and farther. Wind diverter can be set to 3 different angles.  
Dry haze with minimum residues.  
6.4-liter large reservoir allows long time operation without frequent refills.  
Clear liquid level indication window.  
Operating time : 40 hrs max. output

**Recommended liquid :**  
**HZL-5W (B04837) & HZL-5 (B04832)**



**F-7 Smaze**  
All-in-one solution: fog and mist modes

Code : B04844



Tank: 5 litres  
Preheating time: 8 minutes  
Output volume:  
Fog mode: 650 m3 per minute  
Faze mode: 170 m3 per minute  
Max. consumption  
Fog mode: 140 ml/min  
Faze mode: 28 ml/min  
Control panel: LCD screen, smoke volume and diffusion fan speed management  
DMX mode: 3 channels  
Integrated DMX wireless receiver:  
Power supply: 230V - 50Hz  
Power consumption: 1650W max.  
Dimensions: 710 x 412 x 710 mm  
Net weight: 52.5 Kg

**Recommended liquid :**  
**FLG-5 (B04838)**



**HZ-500**  
Hazer machine

Code : B04817



Tank: 2.5 litres  
Output volume: 85 m3 per minute  
Max. consumption. 1.1ml/min  
Control panel: LCD display  
Volume and Timer Mode  
DMX mode: 1 channel  
Noise level: lower than 70 dB from 10cm  
Power supply: 230V - 50Hz  
Power consumption: 480W max.  
Dimensions: 490 x 351 x 338 mm  
Net weight: 31.5 Kg

**Recommended liquid :**  
**HZL-5W (B04837) & HZL-5 (B04832)**



**F-5D**  
Fazer machine trustworthy and efficient.

Code : B04846



Heating element: 800W  
Preheating time: 4 minutes  
Tank: 2.8 litres  
Output volume: 85 m3 per minute  
Max. consumption 3ml/min at 100%  
Control panel: LCD screen, smoke volume and diffusion fan speed management  
DMX mode: 2 channels  
Integrated DMX wireless receiver:  
Power supply: 230V - 50Hz  
Power consumption: 800W max.  
Dimensions: 535 x 465 x 225 mm  
Net weight: 22.9 Kg

**Recommended liquid :**  
**FLG-5 (B04838)**



**HZ-350**  
Hazer machine

Code : B04826



Tank: 2.5 litres  
Output volume: 57 m3 per minute  
Max. consumption. 0.8 ml/min  
Control panel: LCD display  
Volume and Timer Mode  
DMX mode: 1 channel  
Wireless remote included  
Power supply: 230V - 50Hz  
Power consumption: 390 W max.  
Dimensions: 492 x 273 x 314.5 mm  
Net weight: 14.2 Kg

**Recommended liquid :**  
**HZL-5W (B04837) & HZL-5 (B04832)**



**HAZETEC**  
Smoke / Fazer machine

Code : H10487



Heating element: 1400W (preheating), 90W (operation)  
Preheating time: 46 seconds  
Tank: 6 litres  
Output volume: 99m3 per minute  
Max. consumption 17ml/min at 100%  
Control panel with smoke volume and diffusion fan speed management  
2 DMX channels: Smoke volume and diffusion fan speed  
Power supply: 230V - 50Hz  
Power consumption: 900W max.  
Dimensions: 343 x 364 x 290 mm  
Net weight: 11.9 Kg

**Recommended liquid :**  
**MD6L (H10491)**



**FLY-HAZETEC**  
Flight case for HAZETEC

Code : H10510



# FAZER MACHINES



## BT-FAZE 7500

Machine à brouillard 1200W - 7500cuft  
DMX Prof.

Code : B04851



Mains Input: AC 230V, 50Hz  
Power consumption: 1200 Watt  
DMX Channels: 2  
Smoke dissipation by a powerful turbine  
Fuse: T8A/250V (slow blow 6x30mm)  
Output: +/- 7500 cubic ft/min (200m3)  
Warm up time: 2.5 min  
Tank size: 5L  
Size: 490x225x330mm  
Weight: 12kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-380

Hazer machine

Code : B04847



Heating element: 1500W  
Preheating time: 1.5 minutes  
Tank: 1.2 litres  
Output volume: 170m3/min  
Max. consumption: 6 ml/min at 100%  
Control panel with smoke volume and fan management  
DMX mode: 1 or 2 channels  
Use liquid:  
Power supply: 230V - 50Hz  
Power consumption: 1500W  
Dimensions: 328 x 248 x 265 mm  
Net weight: 8.48 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-350

Fazer

Code : B04828



Heating element: 700W  
Preheating time: 4 minutes  
Tank: 1.3 litres  
Output volume: 85m3/min  
Max. consumption: 3ml/min at 100%  
Control panel with smoke volume and fan management  
2 DMX channels: Smoke/fan  
Power supply: 230V - 50Hz  
Power consumption: 900W max.  
Dimensions: 320 x 153 x 391 mm  
Net weight: 8.8 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## FAZE-700

Fazer

Code : B04891



Heating element: 700W  
Preheating time: 3 minutes  
Tank: 1.2 litres  
Output volume: 39.65 m3/min  
Adjustable fog output:  
Via the integrated control panel.  
Via wired remote (included).  
Power supply: 230V - 50Hz  
Power consumption: 700W  
Dimensions: 300 x 147 x 290 mm  
Net weight: 5 kg

**Recommended liquid :**  
**FOG LIQUID HI-TECH (B04812)**  
**FOG LIQUID STD (B04811)**



## Z-3

ANTARI wired remote Z-350

Code : B04829



Wired remote for Z-350  
Connector: stereo jack 6.35 mm  
Function: Volume, start/stop



# SMOKE MACHINES



## W-515D

Smoke machine 1500W

Code : B04842



Heating element: 1500W  
 Preheating time: 10 minutes  
 Tank: 6 litres  
 Output volume: 566 m3/min  
 Max. consumption: 10 min/litre at 100%  
 Wireless remote included  
 Control panel: LCD display  
 Management: Volume, Timer  
 DMX mode: 1 channel  
 Integrated DMX wireless receiver  
 Power supply: 230V - 50Hz  
 Power consumption: 1500W max.  
 Dimensions: 561 x 278 x 186 mm  
 Net weight: 14 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## W-530D

Smoke machine 3000 W

Code : B04843



Heating element: 3000W  
 Preheating time: 12 minutes  
 Tank: 6 litres  
 Output volume: 1132 m3/min  
 Max. consumption: 6 min/litre at 100%  
 Wireless remote included  
 Control panel: LCD display  
 Management: Volume, Timer  
 DMX mode: 1 channel  
 Integrated DMX wireless receiver  
 Power supply: 230V - 50Hz  
 Power consumption: 3000W max.  
 Dimensions: 581 x 278 x 186 mm  
 Net weight: 14 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-3000 II

Smoke machine 3000W + remote

Code : B04809



Heating element: 3000W  
 Preheating time: 12 minutes  
 Tank: 6 litres  
 Output volume: 1132 m3/min  
 Max. consumption: 200 ml/min at 100%  
 Detachable control panel:  
 Management: Volume, Timer, Manual  
 DMX mode: 1 channel  
 Power supply: 230V - 50Hz  
 Power consumption: 3000W max.  
 Dimensions: 581 x 278 x 186 mm  
 Net weight: 14 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-1500 II

Smoke machine 1500W + remote

Code : B04808



Heating element: 1500W  
 Preheating time: 9.5 minutes  
 Tank: 6 litres  
 Output volume: 566 m3/min  
 Max. consumption: 110 ml/min at 100%  
 Detachable control panel:  
 Management: Volume, Timer, Manual  
 DMX mode: 1 channel  
 Power supply: 230V - 50Hz  
 Power consumption: 1500W max.  
 Dimensions: 688 x 285 x 257 mm  
 Net weight: 14 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-1200 II

Smoke machine 1200W + remote

Code : B04807



Heating element: 1200W  
 Preheating time: 9.5 minutes  
 Tank: 2.5 litres  
 Output volume: 510 m3/min  
 Max. consumption: 90 ml/min at 100%  
 Control panel:  
 Management: Volume, Timer, Manual  
 DMX mode: 1 channel  
 Power supply: 230V - 50Hz  
 Power consumption: 1200W max.  
 Dimensions: 458 x 243 x 251 mm  
 Net weight: 10.9 kg

**Recommended liquid :**  
**FLG-5 (B04838)**



## Z-30PRO-433

Wireless control module for Z-1500II / Z-3000II

Code : B04827



## WTR-20

Wireless transmitter and receiver 433MHz

Code : B04883



1 x W-2 transmitter  
 1 x W-2 receiver  
 frequencies: 315MHz and 433MHz

# SMOKE MACHINES



## FX-1200

Smoke machine - 1200W

Code : B04895



## FX-700

Smoke machine - 700 W

Code : B04818



## FC-5

Wireless remote for FX-700

Code : B04819



Heating element: 1200W  
Preheating time: 5 minutes  
Tank: 2,5 litre  
Output volume: 510 m3/minute  
Wired and wireless remote included  
Wireless FC-5 remote optional  
Power supply: 230V - 50Hz  
Power consumption: 1200W max.  
Dimensions: 475 x 253 x 200 mm  
Net weight: 6.55 kg

**Recommended liquid :**  
**FOG LIQUID HI-TECH (B04812)**  
**FOG LIQUID STD (B04811)**

Heating element: 700W  
Preheating time: 5 minutes  
Tank: 0.8 litres  
Output volume: 70 m3/minute  
Wired remote included  
Wireless FC-5 remote optional  
Power supply: 230V - 50Hz  
Power consumption: 700W max.  
Dimensions: 330 x 160 x 130 mm  
Net weight: 3.65 kg

**Recommended liquid :**  
**FOG LIQUID HI-TECH (B04812)**  
**FOG LIQUID STD (B04811)**

Wireless remote for F-80Z, FX-700 and FX-100  
The receiver's magnetic housing can be attached to the smoke machine  
Range: ± 30m

# BUBBLES MACHINE



## FX-400

Smoke machine with Amber LEDs

Code : B04897



## MAGICAN

Fog in a tank

Code : B04833



Power supply: 220 to 240 V AC, 50 Hz  
Power consumption: 400 W  
Fuse (size: 5 x 20 mm) : 250 V/5 A  
Preheating time: 2 to 3 min  
Tank capacity: 0.5 l  
Liquid consumption: 4 ml/min  
LED: 3 x 3 W [amber]  
Dimensions: 237 x 118 x 163 mm  
Weight: 1.8 kg

**Recommended liquid :**  
**FOG LIQUID HI-TECH (B04812)**  
**FOG LIQUID STD (B04811)**

Very original.  
Fog in a tank!  
For use in small rooms  
Always ready for use  
Non-toxic, non-irritating, does not damage ozone layer



## BUBBLE-01

Bubble machine

Code : B04893



This machine functions with a special ready to use liquid.  
Use liquid: **BUBBLE LIQUID 5L**  
Power supply: 230V - 50Hz  
Power consumption: 30W max.  
Dimensions: 200 x 240 x 210 mm  
Net weight: 1.57 kg

**Recommended liquid :**  
**BUBBLE LIQUID 5L (B01911)**

# FIREFIGHTER'S SMOKE MACHINE



## FT-200

Smoke machine - 1600 W designed for fire training

Code : B04881



## FT-100

Smoke machine - 1500 W designed for fire training

Code : B04880



## FT-20

Portable smoke machine 600 W on batteries designed for fire training

Code : B04882



Heating element: 1600W  
Preheating time: 7 minutes  
Tank: 2.4 litres  
Max. consumption 270 ml/min at 100%  
Coverage: Height 8 metres  
Control panel: LCD display  
Volume and Timer Mode  
DMX mode: 1 channel  
Wireless W-2 remote included  
Z-3 remote optional  
Power supply: 230V - 50Hz  
Power consumption: 1600 W max.  
Dimensions: 301 x 194 x 414 mm  
Net weight: 16 Kg

**Recommended liquid :**  
**FLP-6 (B04836)**

Heating element: 1500W  
Preheating time: 7,5 minutes  
Tank: 6 litres  
Max. consumption 100 ml/min at 100%  
Output volume: 560 m3 per minute  
Control panel: LCD display  
Volume and Timer Mode  
DMX mode: 1 channel  
Wireless W-2 remote included  
Z-3 remote optional  
Power supply: 230V - 50Hz  
Power consumption: 1500 W max.  
Dimensions: 580 x 278 x 264 mm  
Net weight: 14,6 Kg

**Recommended liquid :**  
**FLP-6 (B04836)**

Heating element: 600W  
Battery: DC 12V  
Preheating time: 1 sec  
Tank: 0.4 litres  
Max. consumption 16 ml/min at 100%  
Control panel:  
Manual: on/off  
DMX mode: 1 channel  
WTR-20 optional  
Z-3 remote optional  
Charger: AC 230V - 50Hz / DC 12V  
Power consumption: 600 W max.  
Dimensions: 580 x 278 x 264 mm  
Net weight: 14,6 Kg

**Recommended liquid :**  
**FLM-05 (B04839)**



## FT-20SE

Power base for smoke machine FT-20

Code : B04884



## WARNING

**ONLY USE THE RECOMMENDED SMOKE LIQUIDS FOR YOUR MACHINES.**

These liquids are compliant with the latest health and environmental regulations. These liquids have been specially tested for your machine and guarantee the best possible results.

These are the only liquids that guarantee long term operation, use of other liquids will damage your machine by clogging the heating element and wearing out the pump. Repairs for clogged heating elements will only be covered after expert evaluation. The warranty will only be valid if the recommended liquid was used.

# FAN



**BT-HURRICANE**  
DMX high power fan

Code : B04850



**CASE FOR BT-HURRICANE**  
Flight case for BT-Hurricane

Code : B03277




Studio and stage fan controlled by DMX  
Power: up to 3500m<sup>3</sup>/h or 58m<sup>3</sup>/min (2060 cfm)  
Sound level:  
30 dB minimum speed - 72 dB maximum speed  
Air flow direction adjustable over 180°  
Continuous adjustment of air flow  
Control options:  
DMX 1 channel (XLR 3&5 pins)  
Wireless DMX (WTR-DMX DONGLE option)  
Manual operation (LED display)  
Power supply: 230V - 50Hz  
Power consumption: 200W max.  
Dimensions: 584 x 476 x 397mm  
Net weight: 16.5 kg

# PERFUMES AND LIQUIDS


Specific liquids			
Code	Designation	Type	Brand
B04854	BT-LOWFOG LIQUID - Liquide pour BT-H2FOG - 5L	Heavy smoke	Briteq
B04839	FLM-05 - Fog Liquid for FT-20 - 0.50L	Fireman Training	Antari
B04836	FLP-6 - Fog Liquid for FT-100 (fire training) - 6L	Fireman Training	Antari
B04837	HZL-5W - Water based Hazer Fluid - 5L	Water-based fog	Antari
B04832	HZL-5 - Oil based Haze liquid - 5L	Fog	Antari
H10491	MD6L - Liquide à fumée moyenne densité Hazetec - 6L	Fog	Contest
B04810	FOG LIQUID STD 1L - Fogger liquid standard - 1L	Smoke fluid Standard	JB SYSTEMS
B04811	FOG LIQUID STD 5L - Fogger liquid standard - 5L	Smoke fluid Standard	JB SYSTEMS
B04838	FLG-5 - Heavy Fog Liquid - 5L (green)	High Density Smoke Liquid	Antari
B04835	FOG LIQUID HI-TECH 1L - Fogger liquid Hi-Tech - 1L	High Density Smoke Liquid	JB SYSTEMS
B04812	FOG LIQUID HI-TECH 1L - Fogger liquid Hi-Tech - 5L	High Density Smoke Liquid	JB SYSTEMS
H9656	HD5L - Liquide à fumée haute densité - 5L	High Density Smoke Liquid	Contest
B04834	FLC-5 - Superfast dissipating Fog for Jet Operation - 5L	Smoke Liquid Fast Dissipation	Antari
B01911	BUBBLE LIQUID 5L - Liquid for bubble machine - 5L	Bubbles	JB SYSTEMS
B04813	SNOW LIQUID 5L - Liquid for Snow machine - 5L	Snow	JB SYSTEMS
B04852	SL-5H - Super Dry Snow Fluid - 5L	Snow	Antari
B04830	FOAM LIQUID CC 5L - Concentrated foam liquid - 5L	Foam	JB SYSTEMS
B04831	FOAM LIQUID CC 20L - Concentrated foam liquid - 20L	Foam	JB SYSTEMS
Fragrance Additives			
Code	Designation	Type	Brand
B04822	Fragrance - Apple - Pomme - Parfum liquide fumée	Perfume	JB SYSTEMS
B04820	Fragrance - Coco - Coco - Parfum liquide fumée	Perfume	JB SYSTEMS
B04823	Fragrance - Musk - Muscus - Parfum liquide fumée	Perfume	JB SYSTEMS
B04821	Fragrance - Strawberry - Fraise - Parfum liquide fumée	Perfume	JB SYSTEMS
B04825	Fragrance - Tutti Frutti - Parfum liquide fumée	Perfume	JB SYSTEMS



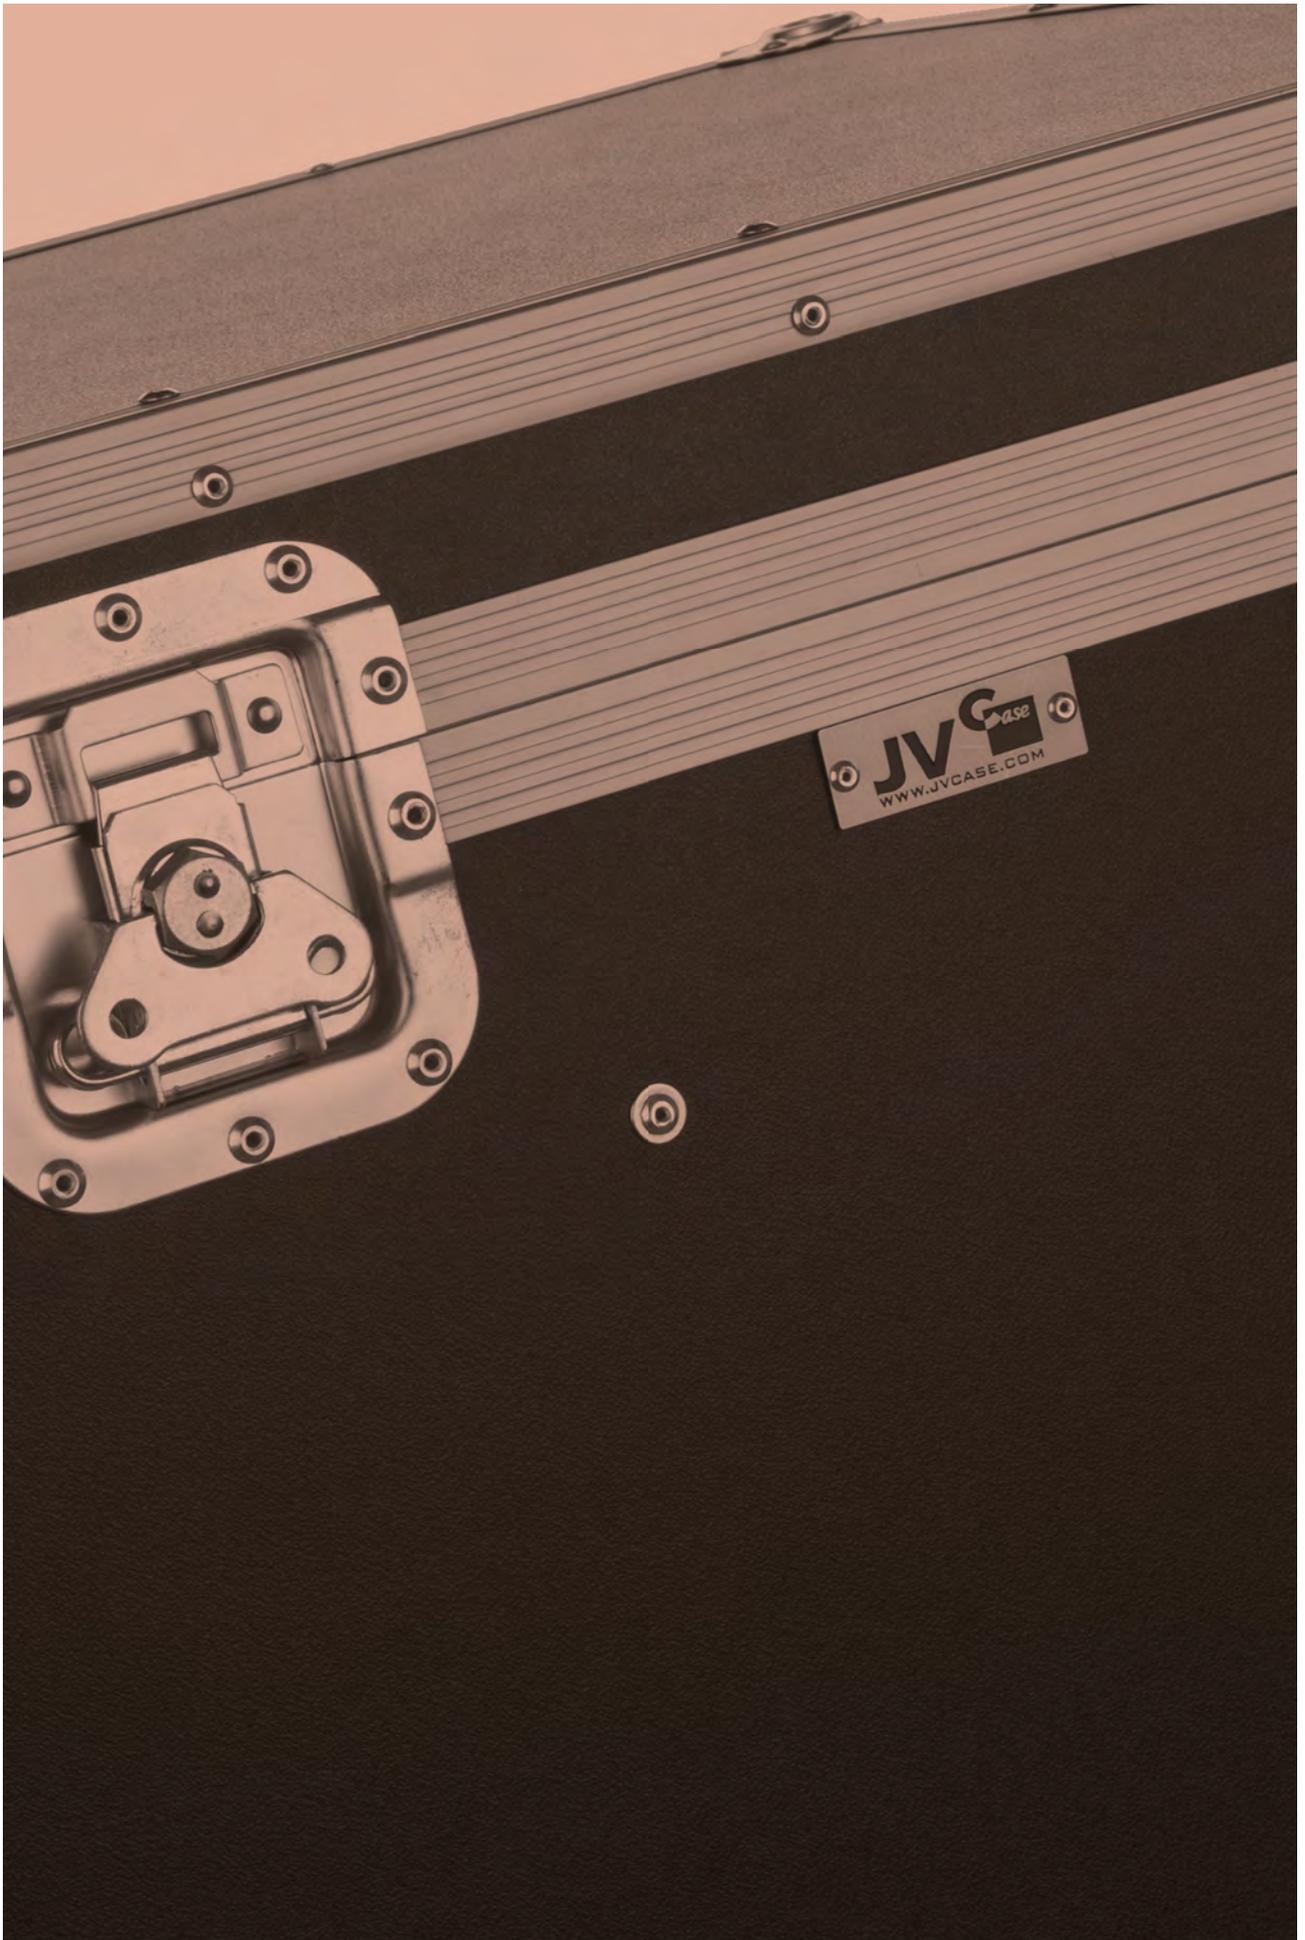

# FLIGHT-CASES

AUDIO FLIGHT-CASES  
FLIGHT-CASES FOR LIGHTS  
19" RACKS

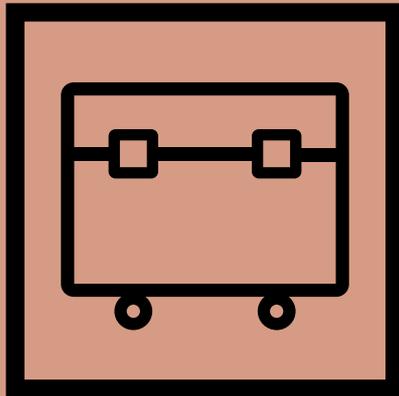

# AUDIO FLIGHT-CASES



**CASE FOR 2x SC-15**  
Flight-case for 2x SC-15.

Code : B03262



**CASE FOR 2x SC-12**  
Flight-case for 2x SC-12.

Code : B03261



**CASE FOR 4x SC-08**  
Flight-case for 4x SC-08

Code : B03260



**CASE FOR 8x SC-05**  
Flight-case for 8x SC-05

Code : B03259



**RACK CASE 10/18U**  
Convenient and versatile Flight-case.

Code : B03240



**CARPET DJ MIXER  
CASE 5U+11U**  
Carpeted DJ Flight-case.

Code : B03200



**TT-CASE**  
High-quality modern flight-case for DJ  
turntables (T2, T3, X-TRM1, SL1200, etc.).

Code : B03206



**CASE FOR  
LIVETOUCH20**  
Flight case for LiveTouch20 mixer

Code : B03292



**MICRO CASE 3U**  
Standard 19" Flight-case 3U height,  
reduced depth 230mm/300mm

Code : B03221



Code : B03224



Code : B03231



# FLIGHT-CASES FOR LIGHTS



## MOVING HEAD CASE 4

Flight case for 2x BTX-CIRRUS

Code : B03288



## MOVING HEAD CASE 5

Flight case for 2x BTX-SATURN

Code : B03291



## WHEELSET FOR WHEEL BOARD

Wheelset with 2 wheels with brake

Code : B03287



## WHEEL BOARD 60x60CM

Wheel plate 60x60cm

Code : B03281



## WHEEL BOARD 80x60CM

Wheel plate 60x80cm

Code : B03282



## CASE FOR 4xACCU DECOLITE

Flight case for 4x Accu Decolite,

Code : B03279



## CASE-3

Flight case for 6x BT-AKKULITE IP / ACCUCOLOR

Code : B03274



## MULTIPURPOSE CASE 1

Flight case 60x80cm with dividers

Code : B03278



## CASE FOR 2xBT-RETRO

Flightcase for 2 x BT-RETRO

Code : B03289



## CASE FOR 3xBT-BLINDER2 IP

Flightcase for 3 x BT-BLINDER2 I

Code : B03290



## PROJECTOR CASE 5

Flight case for 6 x BT-Theatre 50WW-60FC

Code : B03276



Code : B03275



# FLIGHT-CASES FOR LIGHTS

**NEW**



**CASE FOR 2xCHALLENGER BSW**  
Flightcase for 2x CHALLENGER BSW moving heads

Code : B03295



**NEW**



**CASE FOR 4 EFFECT BARS 1M**  
JV Case Flightcase for 4 effect bars like Sunbar White or Combi, Rave Bar

Code : B03294



**NEW**



**MOVING HEAD CASE 6**  
Flight case pour 4x Clubspot/Clubwash 2

Code : B03296



**PROJECTOR CASE 4**  
Case for 4x BT-Theatre 250EZ & 100 EC Mk2.

Code : B03285



**PROJECTOR CASE 3**  
Case for BT-Coloray/Stage-Pro Beamer/ Smar

Code : B03280



**CASE FOR 4xBT-NONABEAM**  
Flight case for 4 x BT-Nonabeam

Code : B03284



**CASE FOR 4xBT-LE-DROTOR**  
Flight case for 4 x BT-Ledrotor

Code : B03283



**CASE FOR BEAM WIZARD5x5**  
Flight-case for 2x BT-BEAM WIZARD

Code : B03256



**CASE FOR 2x BTX-TITAN**  
Flight-case for 2x BTX-TITAN

Code : B03251



**CASE for 4x BT-TRACKER**  
Flight-case for 4x BT-TRACKER.

Code : B03264



# FLIGHT-CASES FOR LIGHTS



**CASE for  
6x BEAM FURY-1**  
Flight-case for 6x BEAM FURY-1

Code : B03265



**MOVING HEAD CASE2**  
Flight-case for 4x BT-Orbit/BT-W19L10 ZOOM

Code : B03272



**CASE FOR 4x STRIKER**  
Flight-case for 4x STRIKER

Code : B03267



**CASE FOR  
2x BTX-HAWK**  
Flight-case for 2x Briteq BTX-HAWK

Code : B03263



**MOVING HEAD CASE1**  
Flight-case for 2x BT-METEOR, BT-70LS, BT-BEAM70

Code : B03255



**LIGHT EFFECT CASE 4**  
Flight-case for 2x LYNX, 2x BT-20LS, 2x BT-30FC or 2x BT-W12L10 ZOOM

Code : B03225



**LIGHT EFFECT CASE 1**  
Flight-case for light effects.

Code : B03216



**LIGHT EFFECT CASE 3**  
Flight-case for light effects (e.g. 2x LED CLUBSCAN OR 2x DYNAMO scan)

Code : B03223



**LIGHT EFFECT CASE 7**  
Flight-case for The Winner II, Led Victoryscan, Led Spinner

Code : B03233



**PROJECTOR CASE**  
Flight-case for 4x projectors with clamps

Code : B03253



**PROJECTOR CASE 2**  
Flight-case for POWERPIXEL8-RGB, POWERPIXEL4-RGB, BEAMBAR10-RGBW, BEAMBAR5-RGBW

Code : B03257



# FLIGHT-CASES FOR LIGHTS



## CASE FOR COB-4BAR

Lightweight and compact case, specially designed to carry a COB-4BAR

Code : B03249



## FLY-irLED64x6

Flight-case for 6x PAR64

Code : H10338



## FLY8-irLEDFLAT

Flight-case for 8x FLAT12SIX

Code : H10739



## CASE for 4x COB-PLANO

4x COB-PLANO + LEDCON-02 Mk2

Code : B03252



## FLY-IPairx6

Flight-case for 6x IPair5x12Six

Code : H10464



## FLY4IPANEL

Flight-case for 4 IPANEL24x100C

Code : H10866



## CASE for 2x BT-VINTAGE

Flight-case for 2x BT-VINTAGE

Code : B03271



## MATRIX5x5-CASE

Flight-case for 6x MATRIX5x5

Code : B04422



## FLY-HAZETEC

Flight-case for HAZETEC

Code : H10510



## CABLE CASE

Extra solid Flight-case specially designed to carry cables and other heavy objects.

Code : B03244



# 19" RACK



**RACK CASE 16U**  
Standard 19" Flight-case 16U height,  
castors included

Code : B03211



**RACK CASE 12U**  
Standard 19" Flight-case 12U height,  
castors included

Code : B03210



**DJ CASE 10/6U**  
Standard 19" Flight-case 6U height +  
10U top

Code : B03227



**PRO 445-4U**  
Standard 19" Flight-case 4U height+  
10U top

Code : B03222



**RACK CASE 8U**  
Standard 19" Flight-case 8U height

Code : B03209



**RACK CASE 6U**  
Standard 19" Flight-case 6U height

Code : B03219



**RACK CASE 4U**  
Standard 19" Flight-case 4U height


Code : B03208



**RACK CASE 2U**  
Standard 19" Flight-case 2U height

Code : B03212



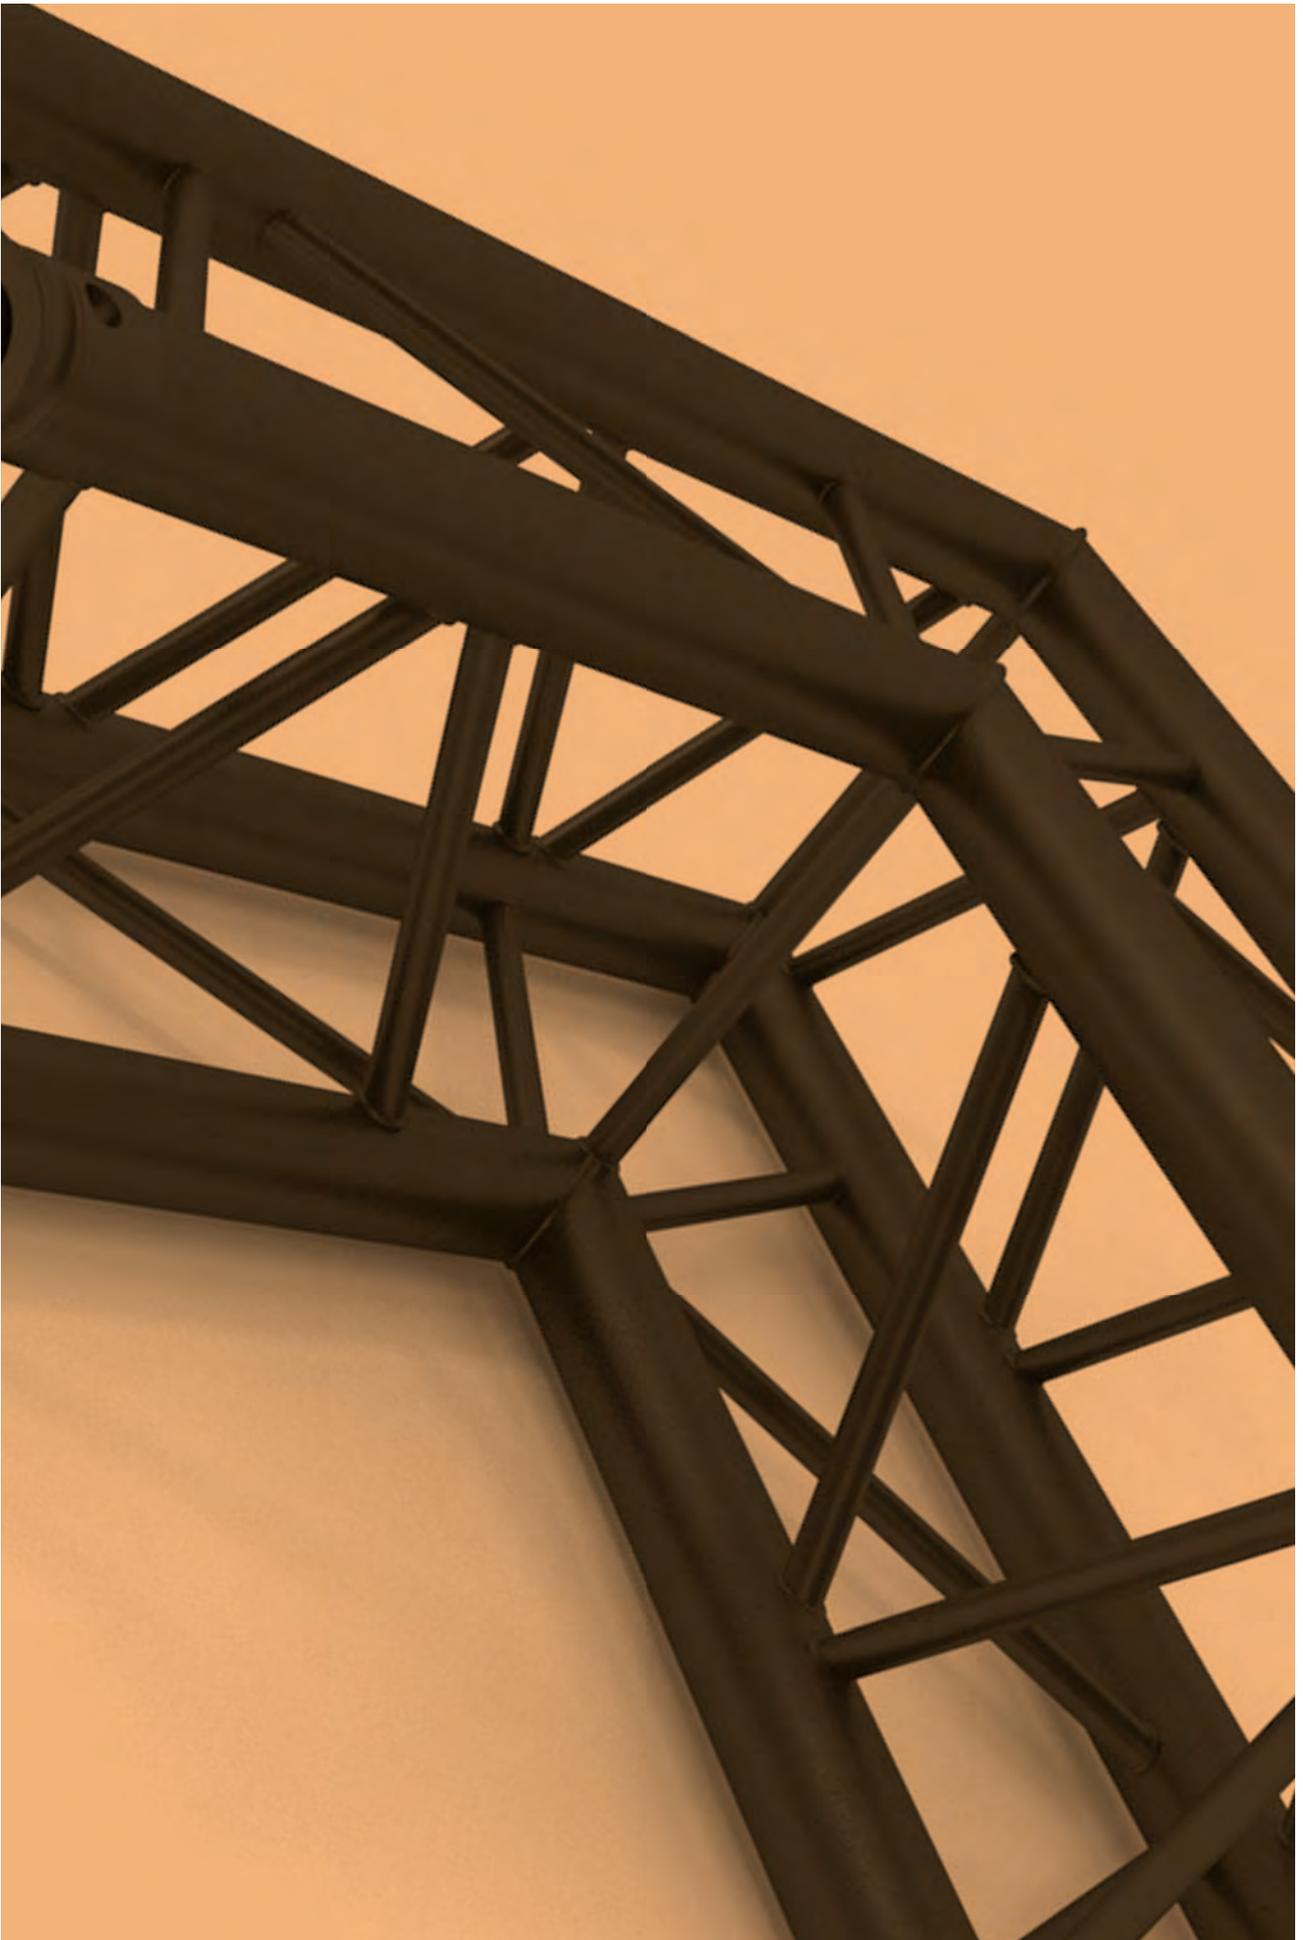

# TRUSSS

**SQUARE:**

**QUATRO HEAVY DUTY**

**QUA29**

**TRIANGULAR :**

**PT29**

**LADDER :**


**DU029**

**TUBE:**

**UNO**

**DEC022Q**

**DEC022T**

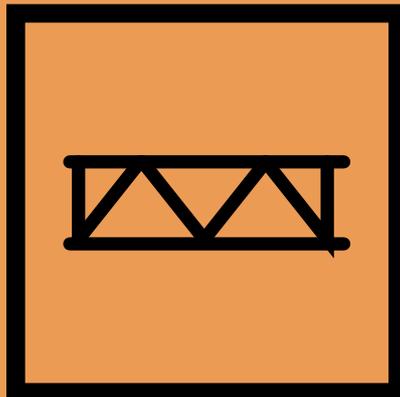

# QUATRO290 - HEAVY DUTY



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6) 48.3 mm in diameter and 3 mm thick

**New dimensions, structure and squares in order to be able to stick as well as possible to your requirements.**  
Truss 25cm / 75cm and squares 50x50x50 cm

- Tubes with a diameter of 48.3 mm and a thickness of 3 mm
- 16 mm threads
- Delivered with assembly sleeves



← 25 cm →

**QUATRO-025**  
Square aluminium truss - Heavy duty - 290 mm - Length 25 cm

---

Code : H11118

---

Weight : 3,5 kg



← 50 cm →

**QUATRO-050**  
Square aluminium truss - Heavy duty - 290 mm - Length 50 cm

---

Code : H11119

---

Weight : 2,8 kg



← 75 cm →

**QUATRO-075**  
Square aluminium truss - Heavy duty - 290 mm - Length 75 cm

---

Code : H11120

---

Weight : 4,35 kg



← 100 cm →

**QUATRO-100**  
Square aluminium truss - Heavy duty - 290 mm - Length 100 cm

---

Code : H11121

---

Weight : 4,9 kg

**QUATRO-200**  
Square aluminium truss - 290 mm Length 200 cm - Heavy duty

---

Code : H11122

---

Weight : 9,1 kg



← 200 cm →

**QUATRO-300**  
Square aluminium truss - 290 mm Length 300 cm - Length 200 cm - Heavy duty

---

Code : H11123

---

Weight : 13,4 kg



← 300 cm →

**The CONTEST® truss comes with :**

- 1 connection kit per bar

LENGTH (M)	↔	4	6	8	10	12	14	16
Max centred load (kg)	▼	1632	1077	797.1	626.1	510	425.2	360.5
Deformation (mm)	⤵	12.4	27.9	49.9	78.5	114	156.7	206.9
Max distributed load (kg/m)	▼▼▼	447.5	295.9	199.3	125.2	85	60.7	45
Deformation (mm)	⤵	8.5	28.7	61.9	96.9	139.8	190.9	250.1

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.

# QUATRO29 - HEAVY DUTY



## QUATRO-A01

Angle alu square 290 - Heavy duty - 2x 90° directions with sleeves


Code : H11124



## QUATRO-A02

Angle alu square 290 - Heavy duty - 3x 90° directions with sleeves


Code : H11125

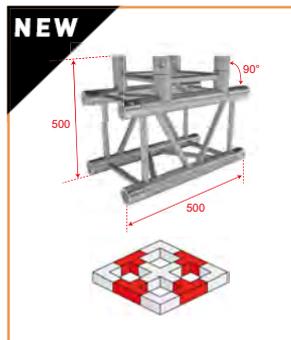

## QUATRO-A03

Angle alu square 290 - Heavy duty - 3x 90° directions with sleeves

Code : H11126

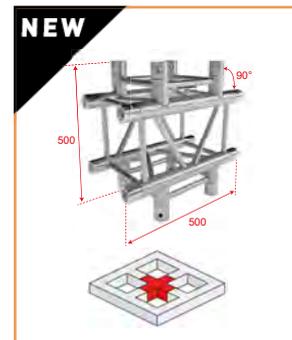

## QUATRO-A04

Angle alu square 290 - Heavy duty - 4x 90° directions with sleeves

Code : H11127



## QUATRO-ABOX

Angle alu square 290 - Heavy duty - 6x directions 90° without sleeve

Code : H11128



## UNO-1/2MANCH

Additional half coupler for QUATRO-ABOX CUBE

Code : H10254



## MCQUA-KIT

Set of 4 conical couplers, 8 spigot pins and 8 Safety R-springs

Code : H10063



## 1/2MANCH

Taper half-sleeve with thread M12 (H=12mm) for EM29BLOU

Code : H6530



## EMQUA-B1

Quatro aluminium baseplate with couplers, keys and pins. 290x290 mm

Code : H10064



## EM29BLOU40D90

40 kg heavy baseplate for TRIO/QUATRO 290 of 90 cm diam

Code : H10835



## EM29BLOU29D74

Heavy baseplate for TRIO/QUATRO 29 diam 74 cm - 29kg

Code : H10463



## BT-TRUSS Q/T 29 BASE80

41 Kg heavy baseplate for Trio/Quat 290 with half-couplers, 800 x 800 mm

Code : B03684







# QUATRO29 SQUARE 290 SILVER



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6) 50 mm in diameter and 2 mm thick

**50 mm tubes**  
**16 mm braces**  
**Square section with 240 mm spacing between each tube (290 mm exterior)**

**Assembly with conical coupler, spigot pin and Safety R-springs**  
**Section: 290 mm**

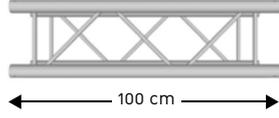

**QUA29-029**  
Square aluminium truss - 290 mm  
Length 29 cm

---

Code : H10118

---

Weight : 3,5 kg

**QUA29-050**  
Square aluminium truss - 290 mm  
Length 50 cm

---

Code : H10049

---

**QUA29-071**  
Quatro aluminium truss - 290 mm  
Length 71 cm

---

Code : H10593

---

Weight : 4,35 kg

**QUA29-100**  
Square aluminium truss - 290 mm  
Length 100 cm

---

Code : H10050


---

**QUA29-200**  
Square aluminium truss - 290 mm  
Length 200 cm

---

Code : H10051

---

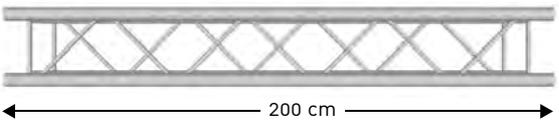


**QUA29-300**  
Square aluminium truss - 290 mm  
Length 300 cm

---

Code : H10052

---

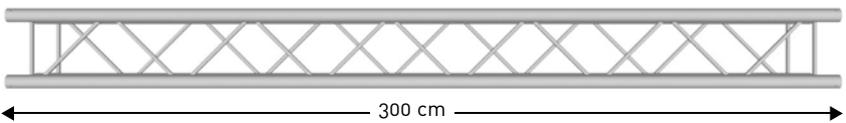

**The CONTEST® truss comes with :**

- 1 connection kit per bar

LENGTH (M)	↔	4	6	8	10	12	14	16
Max centred load (kg)	▼	1177	776.8	574.2	450.8	366.9	305.6	258.5
Deformation (mm)	⤵	12.3	27.9	49.8	78.4	113.8	156.4	206.6
Max distributed load (kg/m)	▼▼▼	449.5	258.9	143.6	90.2	61.2	43.7	32.3
Deformation (mm)	⤵	11.8	34.7	61.7	96.6	139.5	190.4	249.5

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.

# QUATRO29 SQUARE 290 BLACK




Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6) 50 mm in diameter and 2 mm thick


**50 mm tubes**  
**16 mm braces**  
**Square section with 240 mm spacing between each tube (290 mm exterior)**  
**Assembly with conical coupler, spigot pin and Safety R-springs**  
**Section: 290 mm**  
**Matt black epoxy paint very resistant.**




← 29 cm →



← 50 cm →



← 71 cm →

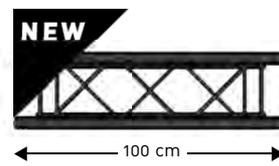

← 100 cm →

**QUA29-029 blk**  
Quatro aluminium 290mm length 29cm black

---

Code : H11007

---

**QUA29-050 blk**  
Quatro aluminium 290mm length 50cm black

---

Code : H11008

---

**QUA29-071 blk**  
Quatro aluminium 290mm length 71cm black

---

Code : H11009

---

**QUA29-100 blk**  
Quatro aluminium 290mm length 100cm black

---

Code : H11010


---

**QUA29-200 blk**  
Quatro aluminium 290mm length 200cm black

---

Code : H11011

---

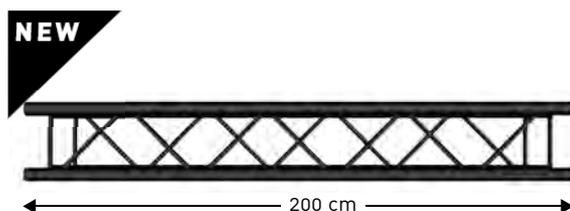


← 200 cm →

**QUA29-300 blk**  
Quatro aluminium 290mm length 300cm black

---

Code : H11012

---

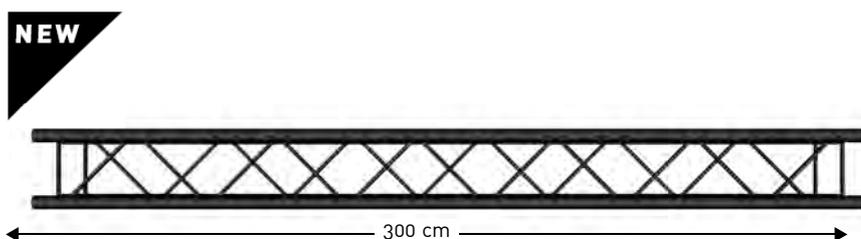

← 300 cm →

**The CONTEST® truss comes with :**  
**• 1 connection kit per bar**

LENGTH (M)	← →	4	6	8	10	12	14	16
Max centred load (kg)	▼	1177	776.8	574.2	450.8	366.9	305.6	258.5
Deformation (mm)	⌒	12.3	27.9	49.8	78.4	113.8	156.4	206.6
Max distributed load (kg/m)	▼▼▼	449.5	258.9	143.6	90.2	61.2	43.7	32.3
Deformation (mm)	⌒	11.8	34.7	61.7	96.6	139.5	190.4	249.5

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.




# QUA29 SQUARE 290 SILVER




The CONTEST® truss comes with :

- 1 x connection kit, angle – 2 directions
- 2 x connection kits, angle – 3, 4 and 5 directions

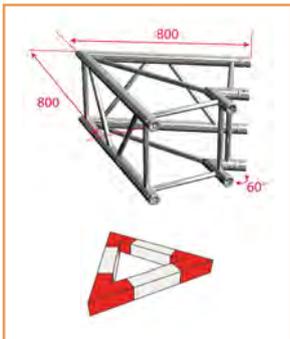


**AGQUA-01**  
Quatro angle - 80 cm 60° - 2 directions

Code : H10053

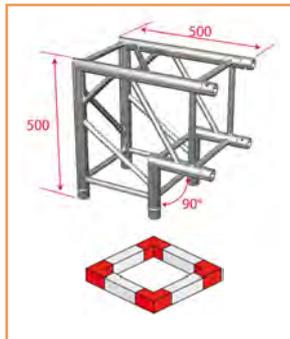


**AGQUA-02**  
Quatro angle - 50 cm 90° - 2 directions

Code : H10054

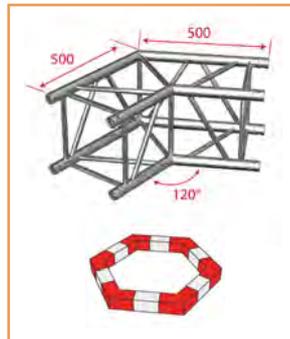


**AGQUA-03**  
Quatro angle - 50 cm 120° - 2 directions

Code : H10055

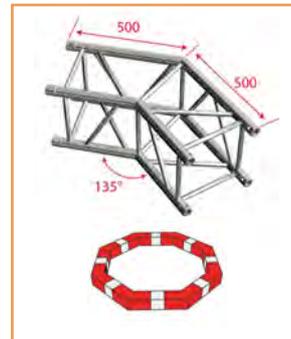


**AGQUA-04**  
Quatro angle - 50 cm 135° - 2 directions

Code : H10056

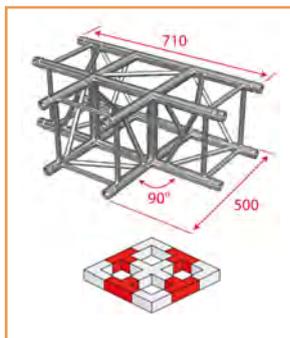


**AGQUA-05**  
Quatro angle - 90° - 3 directions

Code : H10057

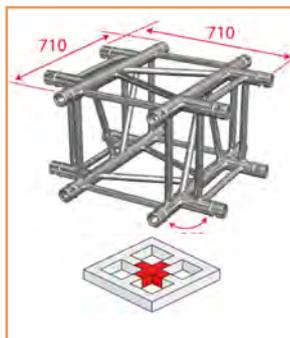


**AGQUA-06**  
Quatro angle - 90° - 4 directions

Code : H10058

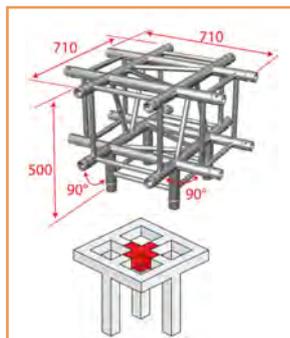


**AGQUA-07**  
Quatro angle - 90° - 5 directions

Code : H10059

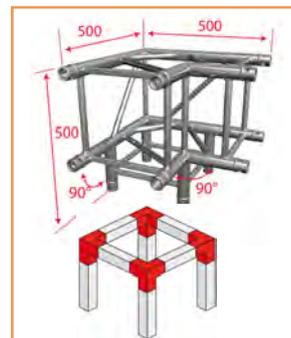

**AGQUA-09**  
Quatro side piece - 3 directions

Code : H10061

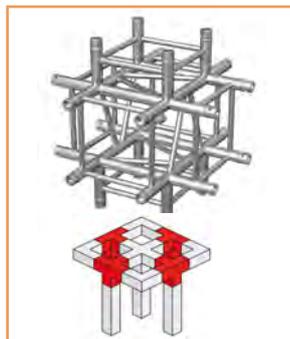

**AGQUA-10**  
Quatro side piece - 4 directions

Code : H10062



# QUA29 SQUARE 290 BLACK



The CONTEST® truss comes with :

- 1 x connection kit, angle – 2 directions
- 2 x connection kits, angle – 3, 4 and 5 directions



**AGQUA-01 blk**  
Quatro angle 2 directions 100cm 60° black

Code : H11001



**AGQUA-02 blk**  
Quatro angle 2 directions 50cm 90° black

Code : H10997



**AGQUA-03 blk**  
Quatro angle - 50 cm 120° - 2 directions

Code : H11005



**AGQUA-04 blk**  
Quatro angle - 50 cm 135° - 2 directions

Code : H11006



**AGQUA-05 blk**  
Quatro angle 3 directions 90° black

Code : H11000



**AGQUA-06 blk**  
Quatro 4 directions black junction

Code : H10999



**AGQUA-07 blk**  
Quatro angle - 90° - 5 directions

Code : H11004



**AGQUA-08 blk**  
Quatro angle - 90° - 6 directions

Code : H11003



**AGQUA-09 blk**  
Quatro 3 directions black

Code : H10998




**AGQUA-10 blk**  
Quatro side piece - 90° - 4 directions

Code : H11002



# QUA29 SQUARE 290

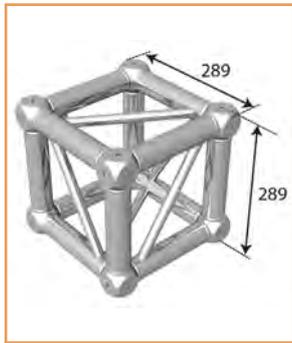

## AGCUB290

Connection cube for 290 mm square truss

Code : H10433



## UNO-1/2MANCH

Additional half coupler for cube AGCUB290

Code : H10254



## MCQUA-KIT

Set of 4 conical couplers, 8 spigot pins and 8 Safety R-springs

Code : H10063



## 1/2MANCH

Taper half-sleeve with thread M12 (H=12mm) for EM29BLOU

Code : H6530



## EMQUA-B1

Quatro aluminium baseplate with couplers, keys and pins. 290x290 mm

Code : H10064



## EMQUA-B1 BLK

Quatro baseplate - With connectors - Black finishing. 290x290 mm

Code : H11013



## TOT-BASEtop

Upper baseplate for Totem with 4 half-couplers

Code : H10256



## TOT-BASEground

Floor baseplate for Totem with 4 half-couplers

Code : H10255



## EM29BLOU40D90

40 kg heavy baseplate for TRIO/QUATRO 290 of 90 cm diam

Code : H10835



Delivered without half-sleeves  
Ref : 1/2MANCH code: H6530

## EM29BLOU29D74

Heavy baseplate for TRIO/QUATRO 290 of 74 cm diam - 29kg

Code : H10463



## BT-TRUSS Q/T 29 BASE80

41 Kg heavy baseplate for Trio/Quat 290 with half-couplers, 800 x 800 mm

Code : B03684



## SWALL290

Wall mount for 290 truss

Code : H11129






# PT29 TRIANGULAR 290 SILVER



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6) 50 mm in diameter and 2 mm thick.

**50 mm tubes**  
**16 mm braces**  
**Triangular section with 240 mm spacing between each tube (290 mm exterior)**

**Assembly with conical coupler, spigot pin and Safety R-springs**  
**Average weight per metre: 4.5 kg**  
**Section: 290 mm**

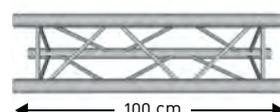

## PT29-029

Aluminium truss - 290 mm  
Length 29 cm

Code : H4213



## PT29-050

Aluminium truss - 290 mm  
Length 50 cm

Code : H3247



## PT29-071

Trio aluminium truss - 290 mm  
Length 71 cm

Code : H10592



## PT29-100

Aluminium truss - 290 mm  
Length 100 cm


Code : H3248



## PT29-200

Aluminium truss - 290 mm  
Length 200 cm


Code : H3249

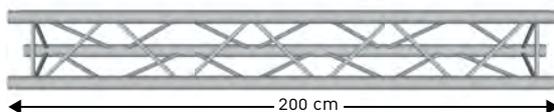

## PT29-300

Aluminium truss - 290 mm  
Length 300 cm

Code : H3250

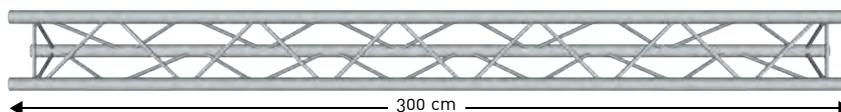

**The CONTEST® truss comes with :**  
**• 1 connection kit per bar**


LENGTH (M)		2	4	6	8	10	12
Max centred load (kg)		1023.9	506.4	331.5	242.2	187.2	149.2
Deformation (mm)		2.6	10.6	24	43.1	68.2	99.6
Max distributed load (kg/m)		783.1	253.2	110.5	60.6	37.4	24.9
Deformation (mm)		2.5	13.2	29.8	53	83.2	120.3

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.



# PT29 TRIANGULAR 290 SILVER

- The CONTEST® truss comes with :
- 1 x connection kit, angle – 2 directions
  - 2 x connection kits, angle – 3, 4 and 5 directions

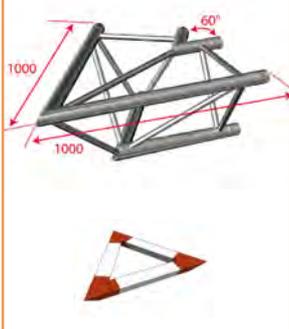

**AG29-020**

Angle - 290 mm 60° - 2 directions -


Code : H7015



**AG29-021**

Angle - 290 mm 90° - 2 directions -


Code : H3251

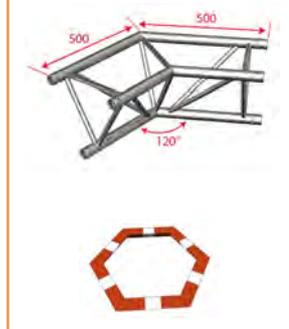

**AG29-022**

Angle - 290 mm 120° - 2 directions -

Code : H7016

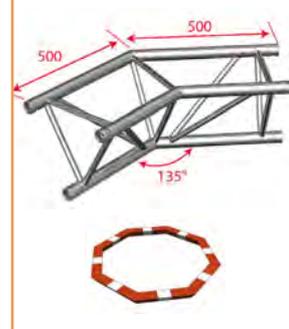

**AG29-023**

Angle - 290 mm 135° - 2 directions -

Code : H3252



**AG29-025**

Angle - 290 mm 90° - 2 directions - Inner vertex


Code : H3253



**AG29-033**

Angle - 290 mm 90° - 3 directions - Lower upright vertex


Code : H3254

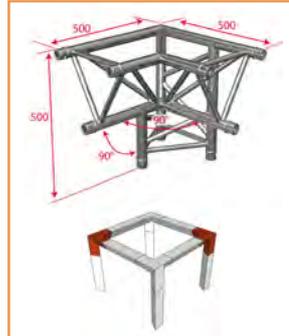

**AG29-034**

Angle - 290 mm 90° - 3 directions - Lower left-hand vertex

Code : H3255

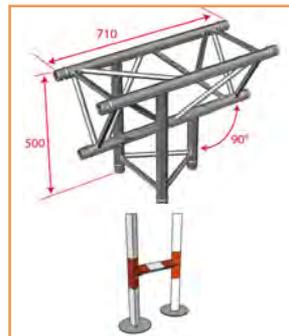

**AG29-035**

Vertical tee - 290 mm - 3 directions - Lower vertex

Code : H3256



**AG29-036**

Horizontal tee - 290 mm 90° - 3 directions

Code : H3257



**AG29-041**

Cross - 290 mm - 4 directions


Code : H3258



**AG29-042**

Tee - 290 mm - 4 directions - Apex down

Code : H3259

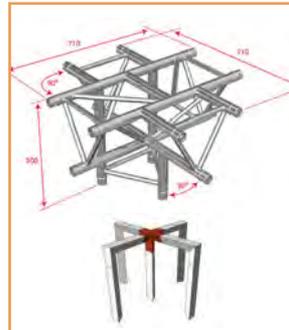

**AG29-053**

Cross - 290 mm - 4 directions plus base

Code : H4212



# PT29 TRIANGULAR 290 SILVER



## MC29-KIT

Set of 3 conical couplers, 6 spigot pins and 6 Safety R-springs

Code : H3261



## MANCH

Single conical sleeve for PT29 structure


Code : H6523



## CLAV

Spigot pin for MANCH

Code : H6524

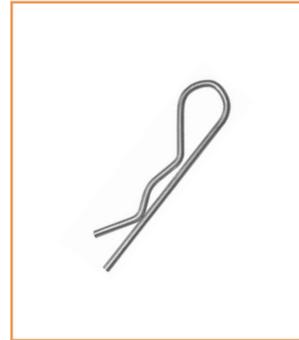

## CLAV

Spigot pin for MANCH

Code : H6525



## EM29-B3

Triangular truss baseplate - 290 mm with conical couplers, spigot pins and Safety R-springs

Code : H8884



## EM29-B3T

Light triangular baseplate for PT29

Code : H10833



## EM29BLOU29D74

Heavy baseplate for TRIO/QUATRO 290 of 74 cm diam - 29kg

Code : H10463



## EM29BLOU40D90

Heavy baseplate for TRIO/QUATRO 290 of 74 cm diam - 29kg

Code : H10835



## BT-TRUSS Q/T 29 BASE80

41 Kg heavy baseplate for Trio/Quat 290 with half-couplers, 800 x 800 mm

Code : B03684



NEW

## SWALL290

Wall mount for 290 truss

Code : H11129






# LADDER 290 SILVER



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss [EN AW 6082 T6] 50 mm in diameter and 2 mm thick.

**50 mm tubes**  
**16 mm braces**  
**Ladder with 240 mm spacing between each tube (290 mm exterior)**

**Assembly with conical coupler, spigot pin and Safety R-spring**  
**Section: 290 mm**



## DU029-029

290 mm aluminium ladder - Length 29 cm

Code : H10036



## DU029-050

290 mm aluminium ladder  
Length 50 cm

Code : H10037



## DU029-071

290 mm aluminium ladder  
Length 71 cm


Code : H10607



## DU029-100

290 mm aluminium ladder  
Length 100 cm

Code : H10038

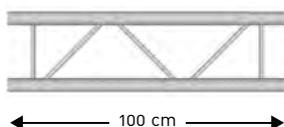


The CONTEST® truss comes with :  
• 1 connection kit per bar

**WARNING! LADDER 290 CONTESTAGE IS NOT COMPATIBLE WITH THE OLD BRITEQ BT-TRUSS DUO STRUCTURE.**

## DU029-200

290 mm aluminium ladder  
Length 200 cm


Code : H10039

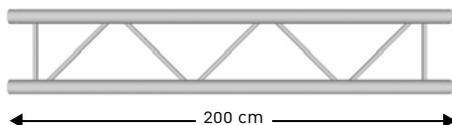

## DU029-300

290 mm aluminium ladder  
Length 300 cm

Code : H10040

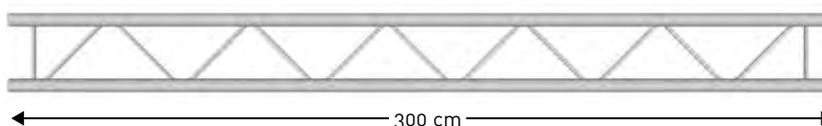


LENGTH (M)		2	3	4	5	6
Max centred load (kg)		904.3	787.9	589.1	469.4	389.2
Deformation (mm)		2.4	6.9	12.3	19.3	27.8
Max distributed load (kg/m)		452.2	300.7	225.0	179.6	129.7
Deformation (mm)		1.5	5.0	11.8	23.0	34.6

The load tables show the weight limits supported between two fixed hook points.

Centred or distributed loads cannot be added together. Consult a qualified technician.

The CONTEST® truss comes with :


- 1 x connection kit, angle – 2 directions
- 2 x connection kits, angle - 2, 3, 4 directions

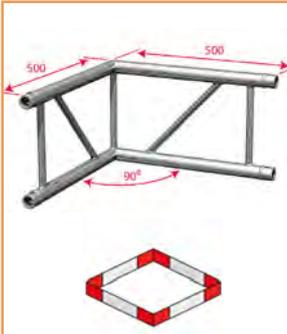

**AGDU029-01**

Corner joint - 2 directions - 90° - upright


Code : H10041

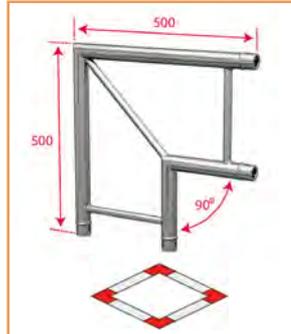

**AGDU029-02**

Corner joint - 2 directions - 90° - flat


Code : H10042

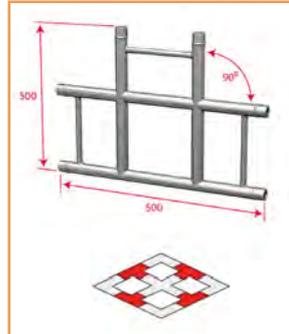

**AGDU029-03**

Corner joint - 3 directions - 90° - flat


Code : H10043

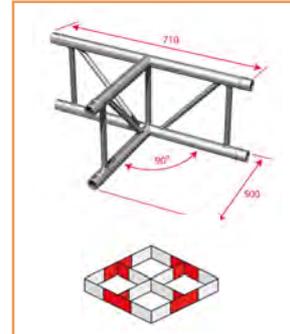

**AGDU029-04**

Corner joint - 3 directions - 90° - upright


Code : H10044

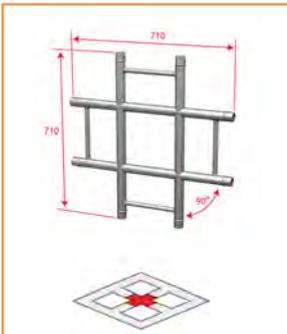

**AGDU029-05**

Corner joint - 4 directions - 90° - flat

Code : H10045

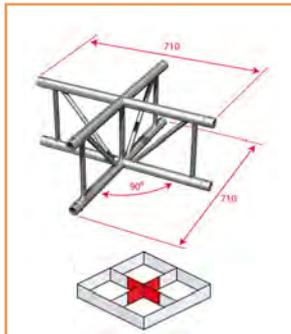

**AGDU029-06**

Corner joint - 4 directions - 90° - upright

Code : H10046



**AGDU0-07**

Corner joint - 3 directions - 90° - upright

Code : H10863



**AGDU0-08**

Corner joint - 3 directions - 90° - upright

Code : H10864



**AGDU0-09**

Tee - 4 directions - 90° - flat

Code : H10865



**EMDU0-B1**

DUO baseplate 290 mm with conical couplers, spigot pins and Safety R-springs

Code : H10048



**MCDU0-KIT**

With 2 conical couplers, 4 spigot pins and 4 Safety R-springs

Code : H10047



**SSL-Duo**

Support for DU029 ladder on 35 mm base

Code : H10609



# TUBE UNO DIAMETER 50MM SILVER

The CONTEST® truss comes with :

- 1x coupler per tube
- 2x coupler per angle



## UNO-50

Aluminium tube Diameter 50 mm  
length 50 cm

Code : H10238



## UNO-100

Aluminium tube Diameter 50 mm  
length 100 cm

Code : H10239



## UNO-150

Aluminium tube Diameter 50 mm  
length 150 cm

Code : H10240



## UNO-200

Aluminium tube Diameter 50 mm  
length 200 cm

Code : H10241



## UNO-50B

Aluminium tube Diameter 50 mm  
length 50 cm-Black

Code : H10417



## UNO-100B

Aluminium tube Diameter 50 mm  
length 100 cm-Black

Code : H10418



## UNO-150B

Aluminium tube Diameter 50 mm  
length 150 cm-Black

Code : H10419



## UNO-200B

Aluminium tube Diameter 50 mm  
length 200 cm-Black

Code : H10420





**UNO-AG01v2**  
Angle for tube Diameter 50 mm UNO +  
2 x 1/2 coupler + spigot pin

Code : H10612



**UNO-1/2MANCH**  
Additional half coupler for angle UNO-AG01

Code : H10254



**1/2MANCH**  
Taper half-sleeve with thread M12  
(H=12mm) for EM29BLOU

Code : H6530



**EM29BLOU29D74**  
Heavy baseplate for TRIO/QUATRO 290 of  
74 cm diam - 29kg

Code : H10463



**UNO-A**  
Suspension bracket for projector for 50 mm  
tube. L 188 mm H 240 mm

Code : H10336






**UNO-T**  
Suspension T for hanging projectors  
50 mm tube

Code : H10334



**UNO-H**  
H-Frame for hanging projectors  
50 mm tube

Code : H10335

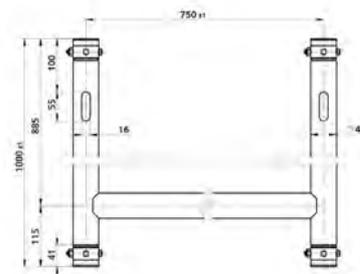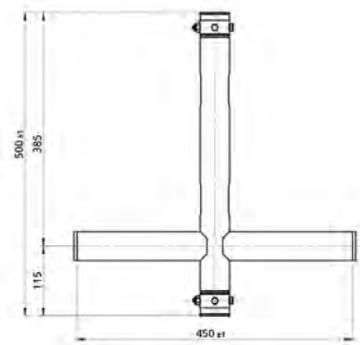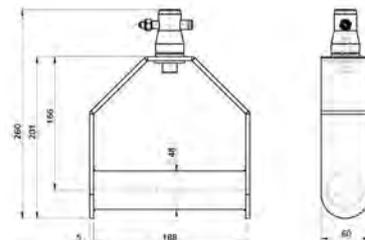

**TOT-BAGUN04x100**  
Carrying case for 4 tubes UNO-100

Code : H11134



**TOT-BAGUN04x150**  
Carrying case for 4 tubes UNO-150

Code : H11135



**TOT-BAGUN04x200**  
Carrying case for 4 tubes UNO-200

Code : H11136



# DECO22Q SQUARE 220 SILVER



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6) 35 mm in diameter and 1,5 mm thick.

**35 mm tubes**  
**8 mm braces**  
**Triangular section with 185 mm spacing between each tube (220 mm exterior)**

**Assembly with conical coupler, spigot pin and Safety R-springs**  
**Section: 220 mm**

**DECO22Q-PT50**  
220mm aluminium square truss - Length: 50 cm

---

Code : H10218

---



**DECO22Q-PT100**  
220mm aluminium square truss - Length: 100 cm

---

Code : H10219

---




**DECO22Q-PT200**  
220mm aluminium square truss - Length: 200 cm

---

Code : H10220

---

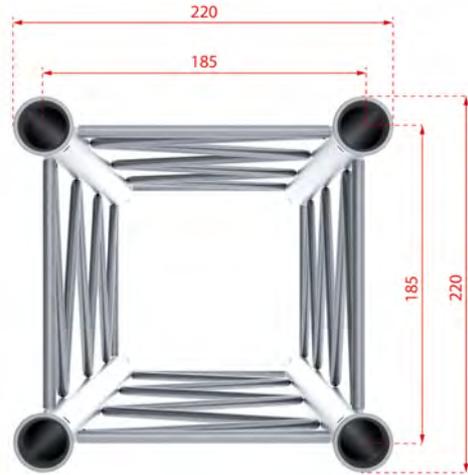

**The CONTEST® truss comes with :**

- 1 connection kit per bar
- 1 x connection kit, angle - 2 directions
- 2 x connection kits, angle - 3 and 4 directions

LENGTH (M)		2	3	4	5	6
Max centred load (kg)		439,1	334,6	248,5	196,4	161,1
Deformation (mm)		1,9	4,9	8,7	13,7	19,8
Max distributed load (kg/m)		219,5	145,4	108,4	78,5	53,7
Deformation (mm)		1,2	4	9,5	16,9	24,4

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.

# DECO22Q CARRÉ 220 SILVER



**DEC022Q-AG01**  
220 mm Quatro angle - 2 directions  
90° - 50 cm

Code : H10221



**DEC022Q-AG02**  
220 mm Quatro side piece - 3 directions  
90° - 50 cm

Code : H10222



**DEC022Q-AG03**  
220 mm Quatro side piece - 3 directions  
90° - 50 cm

Code : H10223



**DEC022Q-MC-KIT**  
DECO series assembling kit

Code : H10224



**DEC022-MANCH**  
Conical coupler for Deco series aluminium  
truss

Code : H10226



**DEC022-CLAV**  
Spigot pin for conical coupler DEC022 series  
by unit

Code : H10227



**DEC022-GOUP**  
Safety R-spring for spigot pin

Code : H10228



**DEC022-1/2MANCH**  
1/2 conical coupler and M8 screw for  
tube of 35

Code : H10332



**DEC022Q-EM-B1**  
Baseplate for DEC022 with connectors

Code : H10225



Delivered without sleeves  
Ref sleeves : DEC022-1/2MANCH  
code: H10332

**DEC022-EMB2**  
Rectangular baseplate for Deco arch for  
tube of 35. 620 x 240 mm

Code : H10333



**DEC022-EMB3**  
60x60 baseplate for DEC022T and DEC022Q  
- With connectors

Code : H10606



**SST-22**  
35mm wind up stand adapter for 220  
structures.

Code : H10873



# DEC022T TRIANGULAR 220 SILVER



Manufacture according to DIN ISO 4113 and TÜV standards.  
Aluminium alloy truss (EN AW 6082 T6)  
35 mm in diameter and 1,5 mm thick.



**35 mm tubes**  
**8 mm braces**  
**Triangular section with**  
**185 mm spacing between each**  
**tube (220 mm exterior)**

**Assembly with conical coupler,**  
**spigot pin and Safety R-springs**  
**Section: 220 mm**

## DEC022T-PT50

Triangular aluminium truss - 20 mm  
Length 50 cm


Code : H10229

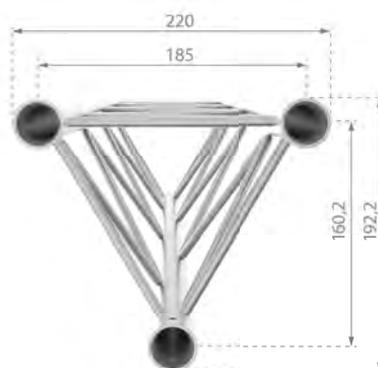

## DEC022T-PT100

Triangular aluminium truss - 20 mm  
Length 100 cm


Code : H10230

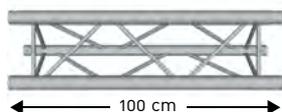

## DEC022T-PT200

Triangular aluminium truss - 20 mm  
Length 200 cm

Code : H10231

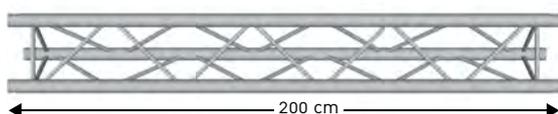

**The CONTEST® truss comes with :**

- 1 connection kit per bar
- 1 x connection kit, angle - 2 directions
- 2 x connection kits, angle - 3 and 4 directions

LENGTH (M)		2	3	4	5	6
Max centred load (kg)		217,7	143,2	105,4	82,3	66,4
Deformation (mm)		1,9	4,2	7,5	11,9	17,3
Max distributed load (kg/m)		190,2	95,5	52,7	32,9	22,1
Deformation (mm)		2	5,2	9,3	14,6	21,1

The load tables show the weight limits supported between two fixed hook points.  
Centred or distributed loads cannot be added together. Consult a qualified technician.

# DEC022T TRIANGULAR 220 SILVER

The CONTEST® truss comes with :

- 1 x connection kit, angle – 2 directions
- 2 x connection kits - 3, 4 directions



## DEC022T-AG01

Triangular angle 220  
2 directions - 50 cm 90°

Code : H10232



## DEC022T-AG02

Triangular angle 220  
3 directions - 50 cm 90° - upright

Code : H10233



## DEC022T-AG03

Triangular angle 220  
3 directions - 50 cm 90° - left-hand


Code : H10234



## DEC022T-AG04

Triangular angle 220  
3 directions - 90° - flat

Code : H10235

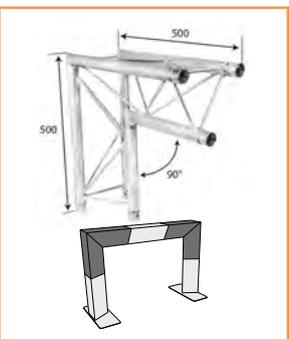

## DEC022T-AG05

Triangular angle 220  
2 directions - 50 cm 90° - right

Code : H10331



# DEC022T TRIANGULAR 220 SILVER



## DEC022T-EM-B1

Trio 220 baseplate with conical couplers, spigot pin and Safety R-springs

Code : H10237



Delivered without sleeves  
Ref sleeves : DEC022-1/2MANCH  
code: H10332

## DEC022-EMB2

Rectangular baseplate for Deco arch for tube of 35. 620 x 240 mm

Code : H10333



## DEC022-EMB3

60x60 baseplate for DEC022T and DEC022Q - With connectors

Code : H10606



## DEC022T-MC-KIT

Set of 3 conical couplers, 6 spigot pins and 6 Safety R-springs

Code : H10236



## DEC022-MANCH

Conical coupler for Deco series aluminium truss

Code : H10226



## DEC022-CLAV

Spigot pin for conical coupler DEC022 series by unit

Code : H10227



## DEC022-GOUP

Safety R-spring for spigot pin

Code : H10228



## DEC022-1/2MANCH

1/2 conical coupler and M8 screw for tube of 35

Code : H10332



## SST-22

35mm wind up stand adapter for 220 structures.

Code : H10873



# WINCH STANDS



Self-locking gear winch, combined with quality components and workmanship for high stability.

Transport and installation are facilitated by three articulated legs.

Ergonomic clamping wheel to eliminate play in the mast.



## ELV-400PRO

Self-braking winch stand with 3 sections  
4 metres - 80 kG

Code : H9996



Material: Treated steel  
Electro-galvanized finish and black epoxy paint  
Top mast: Ø 35 mm  
Winch: Self-braking anti-return gear  
Cable: Galvanized steel, diameter 5 mm  
Max height: : 4.00 m  
Max load: : 80 kg  
Folded length: 1.59 m  
Weight: 23 kg  
TÜV approved



## ELV-270PRO

Self-braking winch stand with 2 sections  
2.7 metres - 60 kG

Code : H9995



Material: Treated steel  
Electro-galvanized finish and black epoxy paint  
Top mast: Ø 35 mm  
Winch: Self-braking anti-return gear  
Cable: Galvanized steel, diameter 3 mm  
Max height: : 2.70 m  
Max load: : 60 kg  
Folded length: 1.60 m  
Weight: 12 kg  
TÜV approved



## LS-290

Self-braking winch stand - 3,00m / 60 kg

Code : B00747



Winch stand with automatic brake and lockable safety  
Max height: : 3,00 m  
Baseplate: 1,20 m  
Section of the last mat: 35 mm  
Maximum load: 60 kg  
Folded length: 1,55 m  
Weight: 12 kg  
Made in France  
TÜV, GS approved



## LS-270

Economical self-braking 2,70m winch stand

Code : B00738



Winch stand with automatic brake and lockable safety  
Max height: : 2,70 m  
Section of the last mat: 35 mm  
Weight: 11 kg  
TÜV, GS approved



NEW

## SP28-38

28mm spigot adapter for 35mm stand

Code : H11107



# TOTeL



This totem pole makes it easy to position your speakers or lighting effects. Thanks to the cable passages on the bases, the power, DMX or audio cables disappear for more aesthetics.

Its adjustable height allows it to be adapted to many different situations. The assembly is carried out without tools thanks to 8 clamping wheels which fix the bases to the tubes.



Assembly is carried out without tools thanks to 8 clamping wheels which fix the baseplates to the tubes.

**NEW**



**TOTeL**  
Telescopic totem from 1 to 1.8m with lycra fabric and covers

---

Code : H11014

---



Minimum height: 1 m  
Maximum height: 1.80 m  
Lower base: 50 x 50 cm  
Upper base: 30 x 35 cm  
Diameter of the base tubes: 43 mm  
Diameter of telescopic tubes: 35 mm  
2 safety pins  
2 adjustment wheels  
Cable passage 11 x 4 cm  
Supplied with 35 mm x 125 mm speaker top mount  
Supplied with white Lycra fabric  
Comes with a cover for the bases and a cover for the feet  
Material: Steel  
Finish: Black paint  
Weight: 18 Kg  
Maximum capacity: 30 Kg



Delivered with baseplate adapter diameter 35 mm x 125 mm

Maximum load: 30kg of inert weight in the vertical axis.

**WARNING: Moving objects such as motorized lyre type objects cause swinging movements which can be dangerous. Please check before any use in public.**



Delivered with a bag for the baseplates and a bag for the feet.

Bags included for Totel & TotelW



Delivered with baseplate adapter diameter 35 mm x 125 mm

Maximum load: 30kg of inert weight in the vertical axis.

**WARNING:** Moving objects such as motorized lyre type objects cause swinging movements which can be dangerous. Please check before any use in public.

**NEW**



**TOTelW**  
White telescopic totem from 1 to 1.8m with lycra fabric and covers


---

Code : H11130

---



Minimum height: 1 m  
 Maximum height: 1.80 m  
 Lower base: 50 x 50 cm  
 Upper base: 30 x 35 cm  
 Diameter of the base tubes: 43 mm  
 Diameter of telescopic tubes: 35 mm  
 2 safety pins  
 2 adjustment wheels  
 Cable passage 11 x 4 cm  
 Supplied with 35 mm x 125 mm speaker top mount  
 Supplied with white Lycra fabric  
 Comes with a cover for the bases and a cover for the feet  
 Material: Steel  
 Finish: White paint  
 Weight: 18 Kg  
 Maximum capacity: 30 Kg

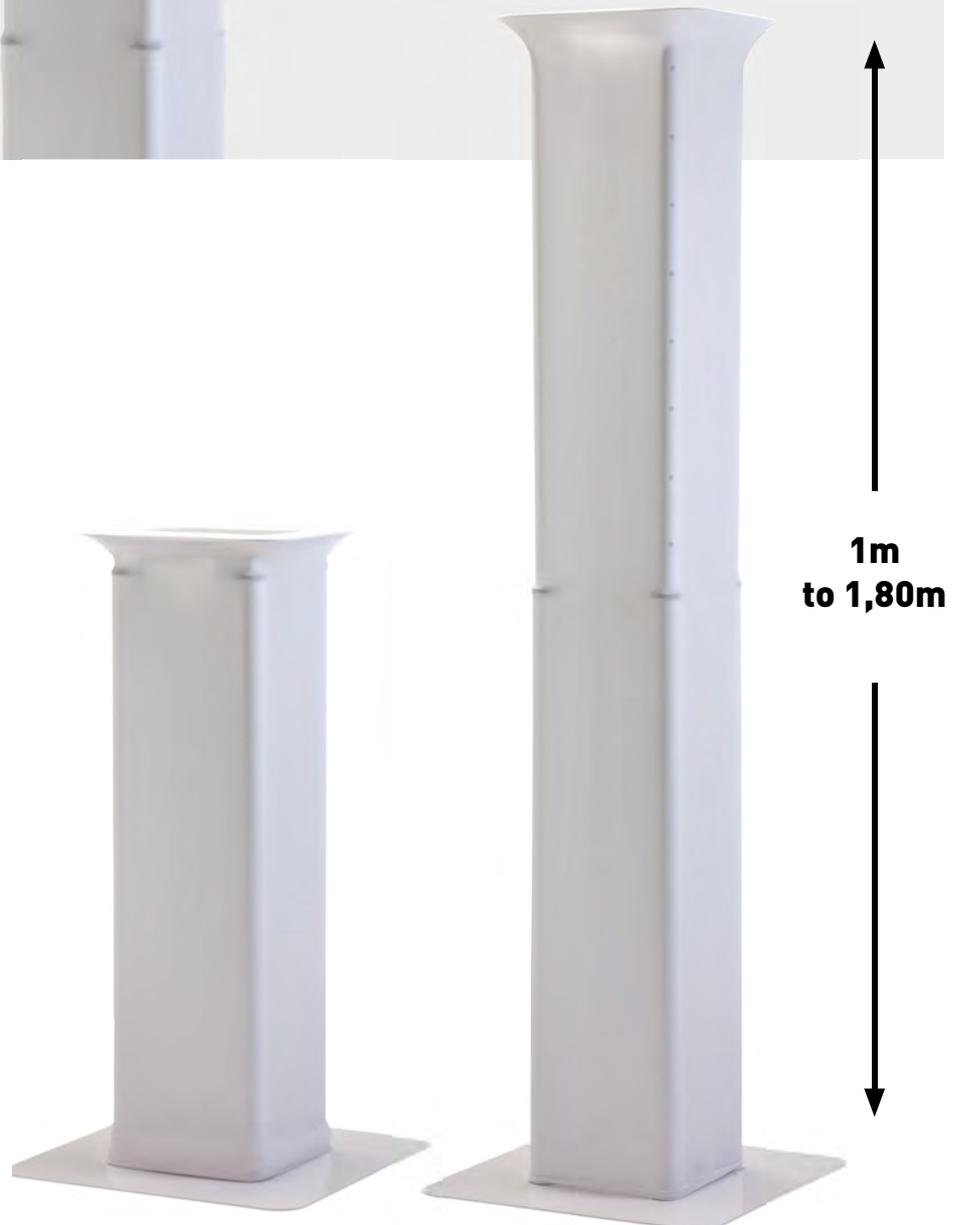

# TOTEMS



**TOTEM CONTEST® is delivered with:**

- 4x Tubes
- 2x Baseplates
- 2x Connection kits
- 1x Spandex textile



## TOT-100

Totem height 100 cm  
With baseplates and fabrics

Code : H10243



## TOT-150

Totem height 150 cm  
With baseplates and fabrics

Code : H10244



## TOT-200

Totem height 200 cm  
With baseplates and fabrics

Code : H10245



## TOT-BASEtop

Upper baseplate for Totem with 4 half-couplers

Code : H10256



## TOT-BASEground

Floor baseplate for Totem with 4 half-couplers

Code : H10255



## TOT-CIRCLE

Circle in tube of 50 of 96 cm diam. for Totem

Code : H10834



# SPANDEX & BAGS



## TOT-Spandex1

Elastic fire-resistant textile for 1m Totem

Code : H10257



## TOT-Spandex1.5

Elastic fire-resistant textile for 1.5m Totem

Code : H10258



## TOT-Spandex2

Elastic fire-resistant textile for 2m Totem

Code : H10259



## TOT-Spandex3

Elastic fire-resistant textile for 3m Totem

Code : H11138



## TOT-Spandex4

Elastic textile totem/structure 290 4m white

Code : H11140



## TOT-Spandex1No

Elastic textile for 1m Totem - Black

Code : H10740



## TOT-Spandex1.5No

Elastic textile for 1.5m Totem - Black

Code : H10741



## TOT-Spandex2No

Elastic textile for 2m Totem - Black

Code : H10742



## TOT-Spandex3No

Elastic fire-resistant textile for 3m Totem Black

Code : H11139



## TOT-Spandex4

Elastic textile totem/structure 290 4m - Black

Code : H11141



## TOT-BAGUNO4x100

Carrying case for 4 tubes UNO-100

Code : H11134



## TOT-BAGUNO4x150

Carrying case for 4 tubes UNO-150

Code : H11135



## TOT-BAGUNO4x200

Carrying case for 4 tubes UNO-200

Code : H11136



## TOT-BAGBASES

Bags for Totem Top (Ground & Top)

Code : H11137



# ACCESSORIES

## hooks

	<b>CCT-20</b> Code : H7834 Professional hook for 20 mm tube	
	<b>CCT-50</b> Code : H3242 Professional hook for tubes from 30 to 50 mm	
	<b>CCT-50B</b> Code : H10414 Pro. hook for 30 to 50 mm tubing-Black	
	<b>CCT-55</b> Code : H7835 Hook with counter plate for tubes from 30 to 50mm	
	<b>CCT-55B</b> Code : H10415 Hook + counter plate for tube 30 to 50mm-Black	
	<b>ALU CLAMP 101-V2</b> Code : B02687 Alu Clamp SWL 75kg tube 48-51mm TÜV-cert	
	<b>ALU CLAMP 101-V2 B</b> Code : H11088 Clamp for tube 50mm 75kg-Black	
	<b>ALU CLAMP 301-V2</b> Code : B02680 Alu Clamp SWL 300kg TÜV 38-51mm + M10 Silver	
	<b>ALU CLAMP 301-V2 B</b> Code : H11090 Alu Clamp SWL 300kg TÜV 38-51mm + M10 Black	
	<b>ALU CLAMP 301-Eye S</b> Code : H11091 38-51 mm 300kg Silver	
	<b>ALU CLAMP 501-V2</b> Code : B02681 Alu Clamp SWL 500kg TÜV 38-51mm + M10 Silver	
	<b>ALU CLAMP 501-V2 B</b> Code : H11093 Alu Clamp SWL 500kg TÜV 38-51mm + M10 Black	
	<b>SWIVEL CLAMP 102 S</b> Code : H11094 Double Tube 38-51mm - 75kg Silver	
	<b>SWIVEL CLAMP 102 B</b> Code : H11095 Double Tube 38-51mm - 75kg Black	
	<b>SWIVEL CLAMP 302-V2</b> Code : B02682 Swivel clamp SWL 500kg TÜV - 38-51mm Silver	
	<b>SWIVEL CLAMP 302-V2 B</b> Code : H11097 Swivel clamp SWL 500kg TÜV - 38-51mm Black	
	<b>SWIVEL CLAMP 502-V2</b> Code : B02683 Swivel clamp SWL 500kg TÜV - 38-51mm Silver	
	<b>SWIVEL CLAMP 502-V2 B</b> Code : H11099 Swivel clamp SWL 500kg TÜV - 38-51mm Black	
	<b>ULTRA CLAMP SILV</b> Code : H11100 Quick hook 48-51 mm - 150kg Silver	
	<b>ULTRA CLAMP black</b> Code : B06600 Quick hook 48-51 mm - 150kg Black	
	<b>FAST CLAMP silver V2</b> Code : H11102 Quick hook 38-51 mm - 150kg Silver	
	<b>FAST CLAMP Black V2</b> Code : B02684 Quick hook 38-51 mm - 150kg Black	
	<b>EASY CLAMP 151</b> Code : H11104 Quick-release hook 44-51mm load 150kg-Si	
	<b>EASY CLAMP 151b</b> Code : H11105 Quick release hook 44-51mm load 150kg-Bl	

## sleeve & half-sleeve

	<b>MANCH</b> Code : H6523 Single tapered sleeve for PT29 structure	
	<b>DECO22-MANCH</b> Code : H10226 Conical sleeve for DECO22 truss	
	<b>1/2MANCH</b> Code : H6530 Taper half-sleeve with thread M12 (H=12mm)	
	<b>1/2MANCH-M10</b> Code : H10323 Conical half-sleeve M10 screw for 50" tube	
	<b>DECO22-1/2MANCH</b> Code : H10332 Conical half-sleeve - M8 thread - for 35mm tubes	
	<b>1/2MANCH-M8</b> Code : H10636 Half-sleeve for 50mm tube with M8 screw thread	
	<b>UNO-1/2MANCH</b> Code : H10254 Extra half-sleeve for UNO-AG01 angle	

## pin

	<p>CLAV Code : H6524</p> <p>Pin for Ø 50 mm tube conical sleeve - Sold by the piece</p>	
	<p>DECO22-CLAV Code : H10227</p> <p>Pin for DECO22 conical sleeve Sold by the piece</p>	

	<p>CLAV/M8 Code : H7840</p> <p>Pin for conical sleeve with M8 screw</p>	
---	---	---

## pin

	<p>Goup Code : H6525</p> <p>Pin for a single wedge</p>	
	<p>DECO22-Goup Code : H10228</p> <p>Safety pin for DECO22 series</p>	

## safety cables

	<p>SC10s Code : H11072</p> <p>Safety cable sheathed Ø1,5mm L30cm 1 quick release clip MWL10Kg-Si</p>	
---	--	---

	<p>SC10b Code : H11073</p> <p>Safety cable sheathed Ø1,5mm L30cm 1 quick release clip MWL10Kg-BL</p>	
---	--	---

	<p>SC40s Code : H11074</p> <p>Safety cable sheathed Ø2mm L40cm 1 quick release clip MWL40Kg-Si</p>	
--	--	---

	<p>SC40b Code : H11075</p> <p>Safety cable sheathed Ø2mm L40cm 1 quick release clip MWL 40Kg-BL</p>	
---	---	---

	<p>SC90s Code : H11076</p> <p>Safety cable sheathed Ø4mm L40cm 1 MWL 90Kg-Si quick fastener</p>	
---	---	---

	<p>SC90b Code : H11077</p> <p>Safety cable sheathed Ø4mm L40cm 1 MWL 90Kg-BL quick fastener</p>	
--	---	---

	<p>SC400s Code : H11078</p> <p>Safety cable sheathed Ø6mm L150cm 2 rings MWL 400Kg-Si</p>	
---	---	---

	<p>SC700 Code : H11079</p> <p>Safety cable sheathed Ø8mm L150cm 2 rings MWL 700Kg-Si</p>	
---	--	---

	<p>SC1000 Code : H11080</p> <p>Safety cable sheathed Ø10mm L150cm 2 rings MWL 1000Kg-Si</p>	
--	---	---

## Mounting T

	<p>SST-20 Code : H8262</p> <p>Mounting Tee for Structure 200 on 28mm stand</p>	
--	--	---

	<p>SST-22 Code : H10873</p> <p>Mounting Tee for Structure 220 on 35mm stand</p>	
--	---	---

	<p>SST-35 Code : H3240</p> <p>T for Structure from 150 to 290 on a 35mm stand</p>	
---	---	---

## supports

	<p>SUP-PIL Code : H10608</p> <p>Support for a post with a clamping chain</p>	
---	--	---

	<p>TCL15 Code : H11106</p> <p>Tent profile hanger bracket load 150kg-Si</p>	
---	---	---

	<p>SPTE290 Code : H10027</p> <p>Suspension piece for 290mm structure</p>	
--	--	---

	<p>OMEGA BRACKET BIG Code : B02678</p> <p>Big version Dimensions (center to center): 141 mm</p>	
---	---	---

	<p>OMEGA BRACKET SMALL Code : B02677</p> <p>Small version Dimensions (center to center): 106 mm</p>	
---	---	---

## shackle

	<p>SHA1000 Code : H11082</p> <p>Steel shackle MWL 1000Kg</p>	
---	--	---

	<p>SHA1500 Code : H11083</p> <p>Steel Shackle MWL 1500Kg</p>	
---	--	---

## quick link

	<p>Clip1000 Code : H11081</p> <p>Quick link MWL 1000 kg</p>	
--	---	---

## wall mount

	<p>SWALL290 Code : H11129</p> <p>Wall mount for 290° structure</p>	
---	--	---

	<p>PAT50 Code : H7838</p> <p>Mounting plate for 50 mm tube</p>	
---	--	---

## hanging ring

	<p>EYEM08 Code : H11084</p> <p>Male hanging ring MWL 140kg</p>	
---	--	---

	<p>EYEM10 Code : H11085</p> <p>Male hanging ring MWL 230kg</p>	
---	--	---

	<p>EYE-10F Code : H10436</p> <p>Female M10 eye bolt MWL230kg</p>	
--	--	---



# PLATFORMS PLTEL

## LIGHTWEIGHT PLATFORM WITH TELESCOPIC LEGS



### FIRE RESISTANCE

Fire resistance class: **Bfl-S1** (corresponds to the French class **M1**). It conforms to the **EN13501-1+A1:2010** European standard.


**NEW**




### PLTEL-1x1

Platform 1x1 m with folding and telescopic legs

Code : H11108

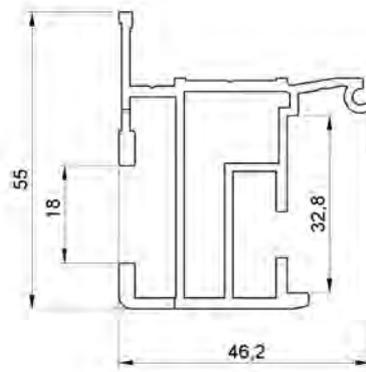

Material:  
Frame : Aluminium  
Tray : 12mm anti-slip plywood  
Dimension 1 x 1 m  
Thickness : 55 mm  
Telescopic legs from 40 to 60 cm high  
Permissible distributed load : 300 Kg/m<sup>2</sup>  
Finish : Aluminium / Black  
Weight : 18 Kg

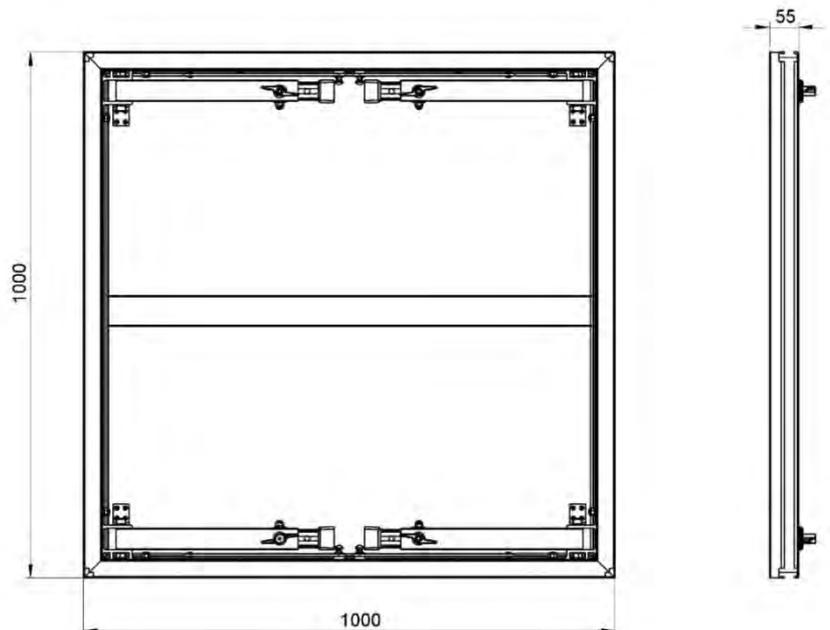



**PLTEL-h1X1**

Handrail for PLTEL platform 1m without fixation

Code : H11110



**PLTEL-ha**

Corner handrail for PLTEL platform 1m without fixation

Code : H11111



**PLTEL-hc1**

Attachment of guardrail to tray for PLTEL

Code : H11109



**PLTS-c1**

Platform assembly clamp

Code : H10371



Material: Steel  
Thickness: 4 mm  
Weight: 0.42 Kg



**PLT-j1**

Junction insert

Code : H10372



**PLT-j2**

Leveling insert

Code : H10373



Compatible with PLTL and PLTS series  
Material: Steel  
Thickness: 3 mm  
Weight: 78 g

Compatible with PLTL and PLTS series  
Material: ABS  
Weight: 11 g




# PLATFORMS PLTS

## PLATFORMS FOR THE STAGE




### FIRE RESISTANCE

Fire resistance class: **Bfl-S1** (corresponds to the French class **M1**). It conforms to the **EN13501-1+A1:2010** European standard.

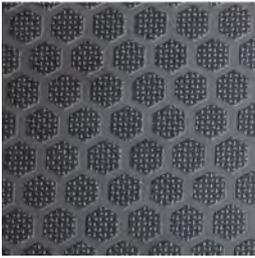

12mm black multi-ply anti-slip plywood

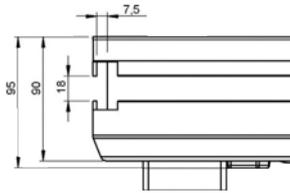


Internal structure of the multi-ply plywood platform and aluminium frame (EN AW6082T6)




### NEW PLATFORMS NEW UNIVERSAL ANGLES



**ROUND LEGS**  
48.3mm

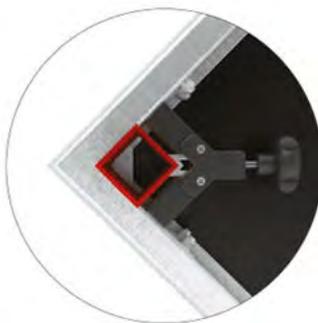

**SQUARE LEGS**  
50X50mm

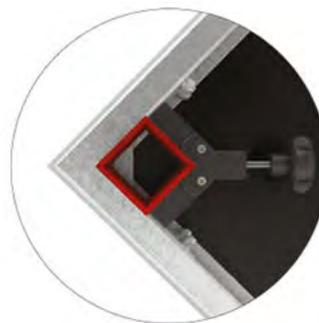

**SQUARE LEGS**  
60X60 mm



### PLTS-1x1

1m Platform x 1m non-slip 750 kg/m<sup>2</sup>- black - Delivered without legs

Code : H10370



Material:  
 - Frame: Aluminium  
 - Tray: 12mm multi-ply  
 Thickness: 90 mm  
 Allowable distributed load: 750 Kg/m<sup>2</sup>  
 Weight: 16 Kg



### PLTS-2x1

2m Platform x 1m non-slip 750 kg/m<sup>2</sup>- black - Delivered without legs

Code : H10369



Material:  
 - Frame: Aluminium  
 - Tray: 12mm multi-ply  
 Thickness: 90 mm  
 Allowable distributed load: 750 Kg/m<sup>2</sup>  
 Weight: 32 Kg



### PLTS-1x0.5

Platform 1x0.5m non-slip 750 kg/m<sup>2</sup>- black - Delivered without legs

Code : H10602



Material:  
 - Frame: Aluminium  
 - Tray: 12mm multi-ply  
 Thickness: 90 mm  
 Allowable distributed load: 750 Kg/m<sup>2</sup>  
 Weight: 8 Kg



### PLTS-2x0.5

Platform 2x0.5m non-slip 750 kg/m<sup>2</sup>- black - Delivered without legs

Code : H10601



Material:  
 - Frame: Aluminium  
 - Tray: 12mm multi-ply  
 Dimension : 2 m x 0.5 m  
 Thickness: 90 mm  
 Allowable distributed load: 750 Kg/m<sup>2</sup>  
 Weight: 16 Kg



### PLTS-T1x1

1x1m anti-slip triangular platform 750 kg/m<sup>2</sup>- black - Delivered without legs

Code : H10603



Material:  
 - Frame: Aluminium  
 - Tray: 12mm multi-ply  
 Dimension : 1 x 1 m  
 Thickness: 90 mm  
 Allowable distributed load: 750 Kg/m<sup>2</sup>  
 Weight: 8 Kg



### PLTS-c1

Platform assembly clamp

Code : H10371



Material: Steel  
 Thickness: 4 mm  
 Weight: 0.42 Kg



### PLT-j1

Junction insert

Code : H10372



Compatible with PLTL and PLTS series  
 Material: Steel  
 Thickness: 3 mm  
 Weight: 78 g



### PLT-j2

Leveling insert

Code : H10373



Compatible with PLTL and PLTS series  
 Material: ABS  
 Weight: 11 g



# PLATFORMS PLTS



## PLTS-ft4060

Telescopic square leg - 0.4 m to 0.6m - per unit

Code : H10374



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 1.66 Kg



## PLTS-ft60100

Telescopic square leg - 0.6m to 1m - per unit

Code : H10375



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 1.8 Kg



## PLTS-ft80140

Telescopic square leg - 0.8m to 1.4m - per unit

Code : H10403



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 2.5 Kg



## PLTS-f20

Square leg 20 cm high - per unit

Code : H10376



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 0.42 Kg



## PLTS-f40

Square leg 40 cm high - per unit

Code : H10377



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 0.78 Kg



## PLTS-f60

Square leg 60 cm high - per unit

Code : H10378



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 1.15 Kg



## PLTS-f80

Square leg 80 cm high - per unit

Code : H10379



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 1.52 Kg



## PLTS-f100

Square leg 1 m high - per unit

Code : H10380



Material: Aluminium  
Thickness: 2 mm  
Section: 60 x 60 mm  
Weight: 1.89 Kg



**PLTS-FW24**

Square leg with caster - Height 24,5 cm

Code : H10858



Material: Aluminium  
Thickness: 3 mm  
Section: 60 x 60 mm  
Wheel diameter: 100 mm  
Weight: 1.41 Kg



**PLTS-FW40**

Square leg with caster - Height 40 cm

Code : H10859



Material: Aluminium  
Thickness: 3 mm  
Section: 60 x 60 mm  
Wheel diameter: 100 mm  
Weight: 1.69 Kg



**PLTS-FW60**

Square leg with caster - Height 60 cm

Code : H10860



Material: Aluminium  
Thickness: 3 mm  
Section: 60 x 60 mm  
Wheel diameter: 100 mm  
Weight: 2.06 Kg



**PLTS-FW80**

Square leg with caster - Height 80 cm

Code : H10861



Material: Aluminium  
Thickness: 3 mm  
Section: 60 x 60 mm  
Wheel diameter: 100 mm  
Weight: 2.43 Kg



**PLTS-FW100**

Square leg with caster - Height 100 cm

Code : H10862



Material: Aluminium  
Thickness: 3 mm  
Section: 60 x 60 mm  
Wheel diameter: 100 mm  
Weight: 2.80 Kg



**PLTS-fc2**

Connecting clamp for two square legs

Code : H10381



Material: Aluminium  
Thickness: 5 mm  
For section: 60 x 60 mm  
Weight: 0.48 Kg



**PLTS-fc4**

Connecting clamp for four square legs

Code : H10382



Material: Aluminium/Steel  
Thickness: 4,5 mm  
For section: 60 x 60 mm  
Weight: 0.48 Kg



# PLATFORMS PLTS



## BT-STAGE-LEGADJ-45/60CM

Telescopic round leg – 0.45m to 0.60m

Code : B03712



Material: Aluminium  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 1.78 Kg



## BT-STAGE-LEGADJ-60/90 CM

Telescopic round leg – 0.60m to 0.90m

Code : B03713



Material: Aluminium  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 2.37 Kg



## BT-STAGE-LEGFIX-20CM

Round leg, fixed height = 20cm, +/- 5cm adj.

Code : B03716



Material: Aluminium  
Adjustable leg: up to 5 cm  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 0.30 Kg



## BT-STAGE-LEGFIX-40CM

Round leg, fixed height = 40cm, +/- 5cm adj.

Code : B03710



Material: Aluminium  
Adjustable leg: up to 5 cm  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 0.49 Kg



## BT-STAGE-LEGFIX-60CM

Round leg, fixed height = 60cm, +/- 5cm adj.

Code : B03711



Material: Aluminium  
Adjustable leg: up to 5 cm  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 0.72 Kg



## BT-STAGE-LEGFIX-80CM

Round leg, fixed height = 80cm, +/- 5cm adj.

Code : B03714



Material: Aluminium  
Adjustable leg: up to 5 cm  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 0.82 Kg



## BT-STAGE-LEGFIX-100CM

Round leg, fixed height = 100cm, +/- 5cm adj.

Code : B03715



Material: Aluminium  
Adjustable leg: up to 5 cm  
Thickness: 3 mm  
diameter: 48 mm  
Weight: 1.18 Kg



## BT-STAGE-LEGCLAMP-4

Connecting clamp for four round legs

Code : B03723



Material: Steel  
Thickness: 5 mm  
Weight: 1.6 Kg



## BT-STAGE-LEGCLAMP-2

Connecting clamp for two round legs

Code : B03722



Material: Steel  
Thickness: 5 mm  
Weight: 0.9 Kg




**PLTS-g1x1**

Bar railing lg 1 m without fastener

Code : H10421



Material: Aluminium  
Diameter: 45.2 mm  
Weight: 7.9 Kg  
Length: 1 m  
Height: 1.2 m

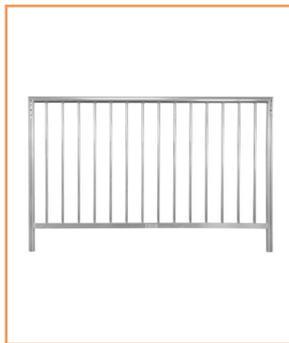

**PLTS-g2x1**

Bar railing lg 2 m without fastener

Code : H10422



Material: Aluminium  
Diameter: 45.2 mm  
Weight: 12 Kg  
Length: 2 m  
Height: 1.2 m



**PLTS-gc1**

Straight fastener for bar railing

Code : H10454



Straight fastener for guardrail:  
PLTS-g2x1  
PLTS-g1x1




**PLTS-gc2**

Angled fastener for bar railing

Code : H10455



Angled fastener for guardrail:  
PLTS-g2x1  
PLTS-g1x1

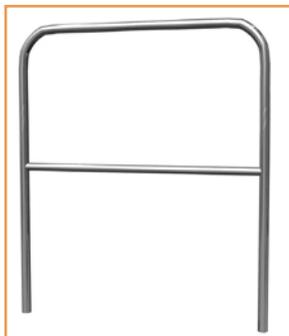


**PLTS-h1x1**

Guardrail for platform of 1m length  
Supplied with fasteners

Code : H10392



Material: Aluminium  
Thickness: 2 mm  
Diameter: 35 mm  
Weight: 2.83 Kg  
Length: 1 m  
Height: 1.2 m

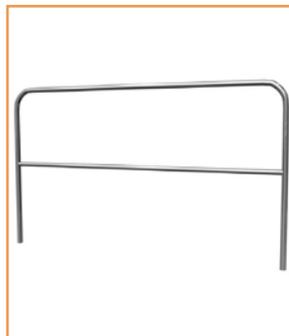

**PLTS-h2x1**

Guardrail for platform of 2m length  
Supplied with fasteners

Code : H10391



**PLTS-hc1**

Platform guardrail fastener - per unit

Code : H10393



Guardrail fastener:  
PLTS-h1x1  
PLTS-h2x1  
Material: Steel  
Thickness: 4 mm  
Weight: 0.45 Kg




**PLTS-hc2**

STAGE series guardrail junction clamp

Code : H10394



Junction clamp for guardrail  
PLTS-h1x1  
PLTS-h2x1  
Material: Steel  
Thickness: 5.5 mm  
Weight: 1.14 Kg

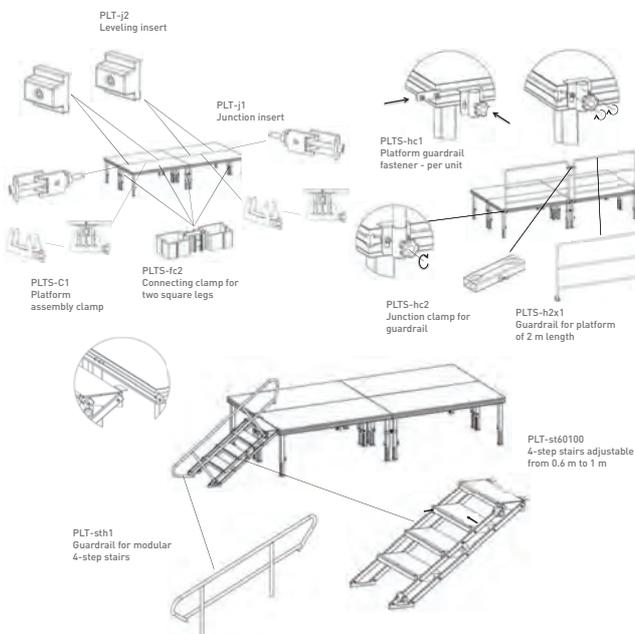

**ATTENTION ON THE SOIL CAPACITY**

Soft ground can affect the safety of the installation. Please spread the loads evenly across the platform surface.

**ABOUT THE GUARDRAIL & STAIRS**

A guardrail must be installed when the height is greater than 50 cm. Stairs less than or equal to 120 cm wide must have at least one handrail.

**CAUTION IN ACCORDANCE WITH THE NF E85-015 STANDARD**

A maximum height of 150 cm is allowed. A guardrail must be installed if the height to be climbed is greater than 50 cm.

These provisions are not exhaustive. For other prescriptions, obtain the standard quoted above.



# PLATFORMS PLTL

## LIGHT PLATFORM WITH FOLDABLE FEET



### PLTL-1x1

Mobile platform 1m x 1m - 500 kg/m<sup>2</sup> - black Delivered without legs

Code : H10395




Material: Aluminium/multi-ply 12mm  
Dimensions 1 x 1 m  
Thickness: 55 mm  
Allowable distributed load: 500 Kg/m<sup>2</sup>  
Finish: Black  
Weight: 12.10 Kg



### Fire resistance

Fire resistance class Bfl-S1  
It complies with European standard  
EN13501-1 + A1: 2010

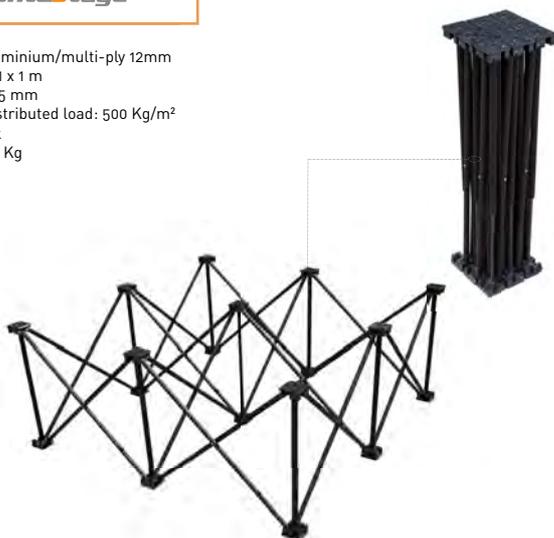


### Attention


The maximum height allowed is 1 meter with 2 supports stacked.

### About Handrails & stairs

A handrail must be installed as soon as the drop height is more than 50cm.

A stair lower or equal to 120 cm must have at least one handrailà 50 cm.

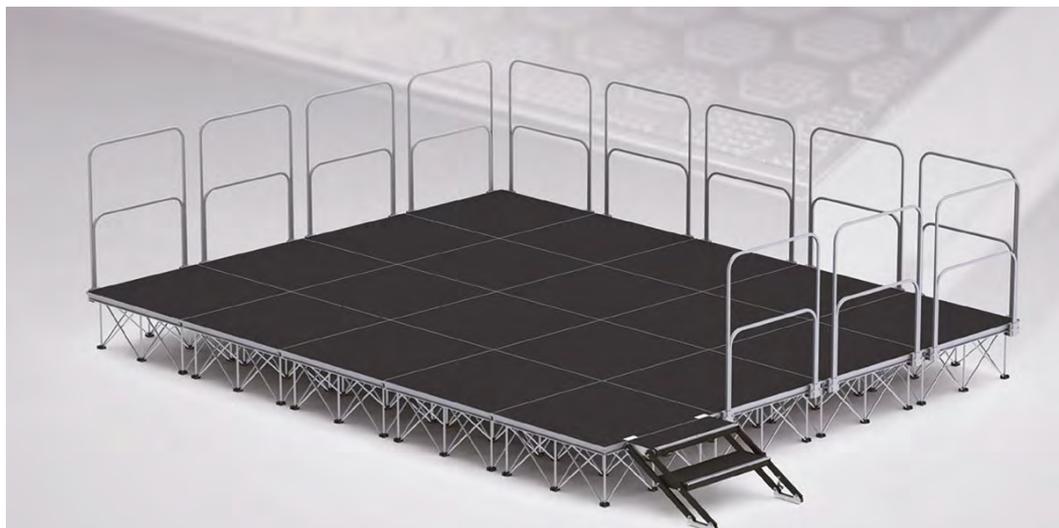

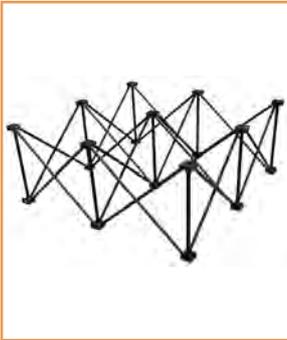

### PLTL-f20

Support for mobile platform 1 x 1m - height 20cm

Code : H10396



Material: Aluminium + ABS  
Finish: Black  
Operating height: 20 cm  
Folded height: 46.4 cm  
Weight: 2.6 Kg




### PLTL-f40

Support for mobile platform 1 x 1m - height 40cm

Code : H10397



Material: Aluminium + ABS  
Finish: Black  
Operating height: 40 cm  
Folded height: 57.4 cm  
Weight: 3.5 Kg

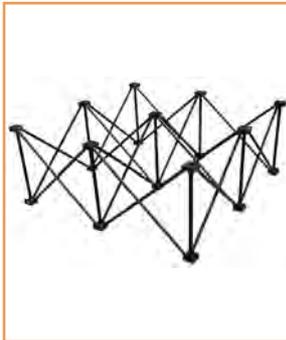

### PLTL-f60

Support for mobile platform 1x1m - height 60cm

Code : H10398



Material: Aluminium + ABS  
Finish: Black  
Operating height: 60 cm  
Folded height: 72.6 cm  
Weight: 4.5 Kg



### PLTL-Con

Code : H10605



PLTL series platform support junction connector (to be combined with PLTL-CLIP)




### PLTL-Clip

Code : H10604



PLTL series platform support clip (to be combined with PLTL-CON)

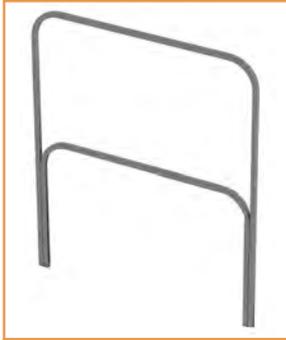

### PLTL-h1x1

Guardrail for platform - length 1 m

Code : H10399



Material: Steel  
Finish: Black  
Section: 25 x 25 mm  
Weight: 4.46 Kg



### PLTL-hc1

Guardrail fastener for mobile platform - per unit

Code : H10400



Material: Steel  
Finish: Grey  
Weight: 0.45 Kg



### PLT-j1

Junction insert

Code : H10372



Compatible with PLTL and PLTS series  
Material: Steel  
Thickness: 3 mm  
Weight: 78 g



### PLT-j2

Leveling insert

Code : H10373



Compatible with PLTL and PLTS series  
Material: ABS  
Weight: 11 g





**PLT-st4060**

Stairs adjustable from 0.4 m to 0.6 m - 2 steps

Code : H10383



Frames: Steel  
Finish: Black  
Step: 12mm multi-ply  
Weight: 16.2 Kg



**PLT-st60100**

Stairs adjustable from 0.6 m to 1 m - 4 steps

Code : H10384



Frames: Steel  
Step: 12mm multi-ply  
Finish: Black  
Weight: 30 Kg



**PLT-st80140**

Stairs adjustable from 0.8m to 1.4m - 5 steps

Code : H10404



Frames: Steel  
Step: 12mm multi-ply  
Finish: Black  
Weight: 37.46 Kg



**PLT-sth1**

Guardrail for adjustable stairs

Code : H10385



Material: Aluminium  
Thickness: 2 mm  
Diameter: 35 mm  
Weight: 3.79 Kg  
Length: 2.3 m  
Height: 0.76 m



**PLT-stm20**

Modular 1-step stairs - height 20 cm

Code : H10386



Frames: Steel  
Step: 12mm multi-ply  
Finish: Black  
Weight: 9.61 Kg



**PLT-stm40**

Modular 2-step stairs - heights 20 and 40 cm

Code : H10387



Frames: Steel  
Steps: 12mm multi-ply  
Finish: Black  
Weight: 20.61 Kg



**PLT-stm60**

Modular 1-step stairs - height 60 cm

Code : H10388



Frames: Steel  
Step: 12mm multi-ply  
Finish: Black  
Weight: 12.15 Kg



**PLT-stm80**

Modular 1-step stairs - height 80 cm

Code : H10389



Frames: Steel  
Step: 12mm multi-ply  
Finish: Black  
Weight: 13.46 Kg



**PLT-sth2**

Guardrail for modular stairs - length 140cm

Code : H10390



Material: Aluminium  
Thickness: 2 mm  
Diameter: 35 mm  
Weight: 3.4 Kg



**PLT-TROLL**

Platform transport trolley

Code : H10424



Transport trolley for 2x1 platforms



**PLT-BOARD**

Platform transport trays

Code : H10423



2 transport trays  
4 braked castors per tray delivered without strap



**FLY6PLTL1**

Flight case for 6 PLTL-1x1 with legs

Code : H10430



Flight case on wheels for transporting 6 PLTL-1x1 platforms, 6 legs and accessories



PLTL-JU20x100  
Code : H10469

Skirt for PLTL platform  
H20cm W105cm




PLTL-JU20x200  
Code : H10474

Skirt for PLTL platform  
H20cm W205cm




PLTL-JU40x100  
Code : H10470

Skirt for PLTL platform  
H40cm L105cm




PLTL-JU40x200  
Code : H10475

Skirt for PLTL platform  
H40cm L205cm




PLTL-JU60x100  
Code : H10471

Skirt for PLTL platform  
H60cm L105cm




PLTL-JU60x200  
Code : H10476

Skirt for PLTL platform  
H60cm L205cm



**NEW**



PLTL-JU60x600  
Code : H11116

Skirt 60cm high - 6m  
long




PLTL-JU80x100  
Code : H10472

Skirt for PLTL platform  
H80cm L105cm




PLTL-JU80x200  
Code : H10477

Skirt for PLTL platform  
H80cm L205cm



**NEW**



PLTL-JU80x600  
Code : H11115

Skirt 80cm high - 6m  
long




PLTL-JU100x100  
Code : H10473

Skirt for PLTL platform  
H100cm L105cm




PLTL-JU100x200  
Code : H10478

Skirt for PLTL platform  
H100cm W205cm



**NEW**



PLTL-JU100x600  
Code : H11114

Skirt 1m high - 6m long




PLTL-JUSUP  
Code : H10479

Fastening profile for  
skirts PLTL-JU L105cm



**NEW**



PLTL-JUVEL6M  
Code : H11117

Adhesive Velcro  
attachment roll length 6m




 **Hilec**  
LIGHT & SOUND ACCESSORIES

**PROFESSIONAL SERIES**



High Quality Pro Cable



# ACCESSORIES

LIGHTING STANDS AND LIGHT  
SPEAKER STANDS  
MICROPHONE STANDS  
MICROPHONE ACCESSORIES  
SUPPORTS  
WALL BRACKETS  
PROTECTIVE COVERS  
BATTERIES  
GAFFAS  
COLOURING  
GOOSENECK LIGHTS  
SOUND CABLES LINE  
SOUND CABLES SPEAKERS  
SOUND CABLES MICRO-  
PHONES  
NEUTRIK® SOUND CABLES  
HYBRID SOUND CABLES  
DMX LIGHT CABLES  
HYBRID LIGHT CABLES  
CABLES POWER SUPPLY  
SOUND CABLE  
VIDEO CABLES  
LIGHT CABLE  
ELECTRIC CABLE

CAT6 CABLE  
NEUTRIK® CONNECTORS  
ELECTRICAL CONNECTORS  
ADAPTERS  
ADAPTER DANTE/ANALOGIQUE  
CONSTRUCTION  
SPEAKERS AND FILTERS  
LAMPS



# STANDS AND LIGHT BRIDGES




## POT-330

Light bridge with steel structure  
Length: 3.00 m Height: 3.20 m

Code : H8259



Net weight: 21.6 Kg  
Light bridge height: 1.49 to 3,18 m  
Light bridge width:  
3 m (2x 1.5 m trusses)  
Number of holes: 10  
Supported load: 80 Kg distributed  
Dimension of each stand on the ground:  
1.2 m  
Diameter of the stand tubes: 28 mm  
Materials:  
- Steel  
- ABS for the wheels  
Finish: black epoxy paint

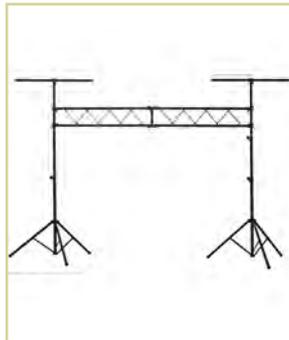

## LB-30

Light bridge: 2stand+truss,  
H3.25m - B4.2m -100kg

Code : B00755



Multifunctional aluminium economical  
bridge  
Consisting of 2 stands with T-bar and  
2 bridge elements  
The 2 stands with T-bar can be used  
separately!  
Perfect for the mobile DJ  
Distributed load up to 100kg!  
Distance between the stands = 3m  
Total width with installed T-bars = 4.2m  
Maximum height = 3.25m



## PID-100

Robust double crossbar stand, all-metal  
Height 3 m ø28

Code : H8252



Net weight: 5.3 Kg  
Height: from 1.48 to 3.13m  
Folded height: 1.23 m  
Tripod diameter: 1.4 m  
Supported load: 30 Kg  
Final tube diameter: 28 mm  
Tripod with double crossbars  
Materials:  
- Steel for tubes, tripod and crossbars  
- Rubber for the ends of the tubes  
- ABS for the knobs  
Finish: matte black epoxy paint



## PID-240

Stand + all-metal bar Height 2.40 m ø28

Code : H8253



Net weight: 6.7 Kg  
Height: from 1.49 to 2.40 m  
Folded height: 1.23 m  
Tripod diameter: 1.2 m  
Supported load: 30 Kg  
Diameter of the final tube: 28 mm  
Horizontal bar length: 1 m  
Single crossbar tripod  
Materials:  
- Steel for tubes, tripod and cross  
- Rubber for the ends of tubes  
- ABS for the knobs  
Finish: matte black epoxy paint



## LST-32

Light stand + T-bar, extendable - H3.18m/  
B1.5m/30kg

Code : B00756



Very stable folding lighting bracket with  
100cm T-bar  
Robust design with 3 telescopic steel  
sections.  
Perfect for mounting all kinds of projec-  
tors and small lighting effects  
Maximum load: 30kg  
Net weight: 6.53 Kg  
Max. height: 3.18 m



## PID-380

3m stand with bar and maximum load  
of 80 kg

Code : H10489



Net weight: 11.2 Kg  
Height: from 1.87 to 3 m  
Folded height: 1.59 m  
Tripod diameter: 1.3 m  
Supported load: 80 Kg  
Diameter of the final tube: 35 mm  
Length of the horizontal bar: 1.5 m  
Horizontal bar diameter: 35 mm  
Tripod with double crossbars  
Materials:  
- Steel for tubes, tripod and crossbars  
- Rubber for the ends of tubes  
- ABS for the knobs  
Finish: matte black epoxy paint



### LS-64

Lighting stand – 3.10m / 80kg

Code : B00732



### FLOOR4

Projector floor stand with M10 screw

Code : H9666



### PROJECTOR FLOOR STAND

Projector floor stand with M10 screw

Code : B04947



**NEW**

### SP28-38

28mm spigot adapter for 35mm stand

Code : H11107



Multifunctional professional stand can be used as speaker stand or lighting stand  
Can be used as lighting stand with the TB-66 bar, available as an option.  
Max. load: 80kg



**PID1-BAG**  
Code : H10012

Customized for PID-100 and PID-240 stands  
Maximum diameter: 16 cm  
Maximum height: 125 cm



**PID2-BAG**  
Code : H10013

Customized for PID-100 and PID-240 stand  
Maximum diameter: 20 cm  
Maximum height: 125 cm



**BRE-120**  
Code : H8256

Internal diameter of the stand adaptor: 28 mm  
Bar length: 1.20 m  
Bar section: 30 x 30 mm  
Number of holes: 4  
Materials: Steel and ABS for the knob  
Finish: matte black epoxy paint  
Net weight: 1.6 Kg



**BRE-50**  
Code : H8845

Length: 1.5 m / round section: 50 mm  
Stand adaptor for 35 mm stands  
Weight: 3.6 kg



**TB-66**  
Code : B00733

T-Bar for LS-64  
Mounting of up to 12 projectors  
Equipped with fixing hardware  
Length = 150cm  
Designed for mounting on standard 35mm mast top



**TB-64**  
Code : B00743

Steel T-Bar (30x30mm)  
Mounting up to 8 projectors  
Equipped with fixing hardware  
Length = 120cm  
Planned for mounting on standard 35mm mast top



**T 150**  
Code : B02616

Truss adaptor for 150mm truss  
Suitable for all our stands that have a ø35mm mast top



**DJ-TRUSS 200**  
Code : B00739

Very strong and compact steel truss, section 150  
Length = 2m



**DJ-TRUSS 150**  
Code : B00740

Very strong and compact steel truss, section 150  
Length = 1.5m



**SST-20**  
Code : H8262

For PT20-150 truss only  
Bar length: 21 cm  
Section of the bar: 30 x 20 mm  
Internal diameter of the stand adaptor: 28 mm  
M8 screw for fastening the truss  
Finish: matte black epoxy paint  
Weight: 0.40 Kg



**SST-22**  
Code : H10873

Stand adaptor with 35mm tube for 220 truss



# SPEAKER STANDS



## SS-AIR

Speaker stand, expandable pneumatic brake - 1.80m / 60kg

Code : B00734



Professional aluminium speaker stand, equipped with a special air cushion system!  
To avoid any accident, the speaker goes down slowly instead of "falling" on its base  
Very stable construction with metal base  
Low minimum height: facilitates placement of the speaker on the stand!  
Max load: 60kg



## CAB-200

All-metal speaker stand Height 2 m

Code : H8245



Net weight: 4.5 Kg  
Height: from 1.41 to 2.10 m  
Folded height: 1.08 m  
Tripod diameter: 1.2 m  
Supported load: 40Kg  
Diameter of the final tube: 35 mm  
Tripod with single crossbars  
Materials:  
Steel for tubes and tripod  
Rubber for the ends of tubes  
ABS for the knobs  
Finish: matte black epoxy paint



## SS-59

Speaker stand, extendable - 2.05m / 40kg

Code : B00737



Professional speaker stand  
Very stable construction with metal base  
Low minimum height: facilitates placement of the speaker on the stand  
Max load: 40kg



## TUB-LINK

83 to 123cm telescopic pole with pin

Code : H9105



Telescopic pole  
Diameter of the upper part: 35mm  
Diameter of the lower part: 35mm  
Height: 83 cm to 123 cm  
Load capacity: 30kg



## SPEAKER POLE (M20 thread)

Telescopic pole

Code : B00659



Telescopic pole  
Diameter of the upper part: 35mm  
Bottom thread: 20mm  
Height: 76 cm to 1.16 m  
Load capacity: 30kg



## VP-130

Telescopic pole

Code : B00655



This special stand offers you the possibility to place a speaker from 0.7m to 1.3m

# SPEAKER STANDS



## TWIN SPEAKER BRACKET Mk2

Adapter for 2 speakers on one stand

Code : B00763



Adapter for installing 2 speakers on a single stand.  
The distance between the speakers can be adjusted between 32 and 51cm.  
Solid steel construction.  
For speakers up to 2x 20kg  
Adapter diameter: D=35mm



## FORK

Separate 42 cm double 35mm adapter for speakers up to 40Kg

Code : H7916



Adapter for the installation of 2 speakers on a single stand.  
Distance between speakers: 42cm.  
Solid steel construction.  
For speakers up to 40 Kg  
Diameter of the adapter: D=35mm



## CAB1-BAG

Bag for 1 speaker stand

Code : H10010



Customized for Audiophony CAB-100 and CAB-200 stands  
Adjustable strap  
Maximum diameter: 16 cm  
Maximum height: 110 cm



## CAB2-BAG

Bag for 2 speaker stands

Code : H10011



Customized for Audiophony CAB-100 and CAB-200 stands  
Divider  
Adjustable strap  
Maximum diameter: 20 cm  
Maximum height: 110 cm



## BAG-STAND

Nylon bag for stands intended for lighting effects or sound system elements

Code : B00741



Stylish and durable nylon bag for stands intended for lighting effects or sound system elements  
Perfect for SS-59, SS-AIR, LST-32 stands



# MICROPHONE STANDS



## MIC-200T

Microphone stand with telescopic boom with heavy baseplate - adjustable height

Code : H8236



Microphone stand with telescopic boom with heavy baseplate  
 Net weight: 5.3 Kg  
 Height: from 92 cm to 1.52 m  
 Baseplate diameter: 25.5 cm  
 Thread at the boom tip: 3/8"  
 Boom length: 55 to 90 cm  
 Materials:  
 - Aluminium for the boom hinge  
 - Steel for the tubes and baseplate  
 - Rubber for the ends of tubes  
 - ABS for the knobs and the boom tip  
 Finish: matte black epoxy paint



## MIC-100

All-metal microphone boom tripod with adjustable height

Code : H8235



Net weight: 2.9 Kg  
 Height: from 1.05 to 1.60 m  
 Tripod diameter: 72 cm  
 Thread at the end of the pole: 3/8"  
 Boom length: 74 cm  
 Materials:  
 - Aluminium for the tripod and boom hinge  
 - Steel for the tubes  
 - Rubber for the ends of tubes  
 - ABS for the knobs and the pole tip  
 Finish: matte black epoxy paint



## MS-26PRO

Adjustable height all-metal pole tripod

Code : B00765



Professional microphone stand with adjustable boom  
 Robust and resistant magnesium base  
 Very good stability  
 Boom length: 64cm  
 Thread at the end of the pole: 3/8"



## MIS10

Microphone stand + bag

Code : H10068



STAND  
 Net weight: 1.8 Kg  
 Height: from 95 cm to 1,48 m  
 Tripod diameter: 70 cm  
 Thread at the end of the pole: 3/8"  
 Length of the pole: 77 cm  
 Materials:  
 - ABS for the tripod and boom hinge  
 - Steel for tubes  
 - Rubber for the ends of tubes  
 - ABS for the knobs and the pole tip  
 Finish: matte black epoxy paint  
 COVER  
 Slide-fastener (zipper)  
 Material: Polyester  
 Customized for Audiophony MIC-100T and MIS10 microphone stands  
 Maximum diameter: 10 cm  
 Maximum height: 110 cm



## MS-27

Straight universal microphone stand

Code : B00766



Straight universal microphone stand  
 Base in thick cast iron, covered with a beautiful layer of plastic.  
 Base diameter: 25cm  
 Thread at the end of the pole: 3/8"



## MS-25

Adjustable height all-metal pole tripod

Code : B00764



Microphone stand with adjustable swivel boom  
 Solid nylon base  
 Very good stability  
 Pole length: 64cm  
 Thread at the end of the pole: 3/8"



## MIC5-BAG

Bag for 5 microphone stands

Code : H10009



Customized for the Audiophony MIC-100 stand  
 5 separate spaces  
 Lateral strap  
 Max. diameter of each space: 10 cm  
 Height of each space: 100 cm  
 28 cm flap



## MIC1-BAG

Bag for 1 microphone stand

Code : H10008



Customized for the Audiophony MIC-100 stand  
 Side handle  
 Maximum diameter: 10 cm  
 Maximum height: 104 cm



### BAG-MIC

Nylon bag for microphone stand

Code : B00742



Stylish and durable nylon bag for microphone stand  
Perfect for MS-25 and MS-26PRO stands



### TMIC100

Flexible arm for microphone with XLR cable and table mounting

Code : H10458



### TMIC-20

Microphone table stand with heavy base - height 30 cm

Code : H8232



Net weight: 3,3 Kg  
Height: 30 cm  
Diameter of the base: 22 cm  
Thread at the end of the pole: 3/8"  
Length of the pole: 74 cm  
Materials:  
Steel  
Rubber on the base  
ABS for the knob and the boom tip  
Finish: matte black epoxy paint



### JB50

Microphone table stand with heavy base - microphone thread : 3/8"

Code : B00702



Microphone table stand  
Heavy base  
Robust design  
Telescopic microphone arm:  
Min. length: 320mm  
Max. length: 565mm



### TMIC-10

Microphone table stand - height 18 cm

Code : H8231



Net weight: 0.24 Kg  
Height: 18 cm  
Tripod diameter: 26 cm  
Thread at the end of the pole: 3/8"  
Materials:  
Steel  
Rubber for the ends of tubes  
Finish: matte black epoxy paint



### JB52

Microphone table stand, thread: 3/8"

Code : B00700



Microphone table stand.  
Innovative design, fully foldable.  
thread: 3/8"  
Height: 170mm



### JB55

Straight table base for microphone

Code : B00704



Straight table base (24 cm to 40 cm)



### JB85

Gooseneck 50cm for microphones

Code : B00709



Flexible gooseneck, length 50 cm



### JB88

Base for gooseneck (JB85)

Code : B00710



# MICROPHONE ACCESSORIES



**JB70**  
Universal clamp for quick-attaching microphone

Code : B00707



Universal clamp for quick-attaching microphone



**JB71**  
Universal clamp for microphone

Code : B00412



Material: ABS  
Maximum opening diameter: 40mm



**A415**  
Spring microphone clamp

Code : H0180



Material: Rubber  
Supplied with 3/8 to 5/8 insert



**A602**  
Insert microphone clamp

Code : H1078




**AD38**  
Microphone clamp adapter 3/8 to 5/8

Code : H9930



**JB75**  
Metal reduction 5/8 to 3/8 (10 pieces)

Code : B00711

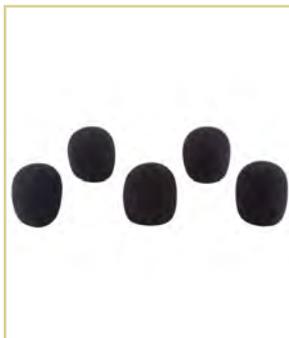

**WINDSCREEN BLACK**  
Set of 5 black foams.

Code : B00415



**WINDSCREEN COLOURED**  
Set of 5 foams in different colors.

Code : B00416



# STANDS



## KB4

Keyboard stand with double crossbars - Magnesium series

Code : H9663



Net weight: 4.5 Kg  
 Height: from 58 to 98 cm  
 Width: from 80 to 82 cm  
 Length of the upper tubes: 40 cm  
 Supported load: 50 Kg max.  
 Locking brake  
 Materials:  
 - Steel for the tubes and bars  
 - Rubber for the ends of tubes  
 Finish: anthracite epoxy paint



## KB-UNO

Keyboard stand

Code : H8226



Net weight: 2.2 Kg  
 Height: from 60 cm to 93 cm  
 Distance of horizontal crossbars: from 32 cm to 80 cm  
 Crossbar length: 30 cm  
 Materials:  
 - Steel for the stand  
 - Rubber for the ends of tubes  
 Maximum load: 25 Kg  
 Finish: matte black epoxy paint



## KB-BAG

Bag for 1 controller or keyboard stand

Code : H10007



Customized for Audiophony KB-ROLL, KB-UNO and KB4 stands  
 Side handle  
 Maximum width: 50 cm  
 Maximum height: 100 cm  
 Maximum thickness of the folded stand: 5 cm



## KB-EXT70

Extension for control stand - inclined

Code : H8227



Net weight: 1.5 Kg  
 Height: 24 cm  
 Crossbar incline: 70° compared to the vertical  
 Crossbar length: 30 cm  
 Materials:  
 - Steel for the stand  
 - ABS for the knob  
 - Rubber for the ends of tubes  
 Finish: matte black epoxy paint



## KB-EXT90

Extension for control stand - straight

Code : H8228



Net weight: 1.5 Kg  
 Height: 24 cm  
 Crossbar incline: horizontal  
 Length of the traverse: 30 cm  
 Materials:  
 - Steel for the support  
 - ABS for the knob  
 - Rubber for the ends of tubes  
 Finish: matte black epoxy paint



## DJ4

Magnesium series DJ control stand

Code : H9665



Net weight: 15 Kg  
 Height: from 68 to 92 cm  
 Dimensions of the main tray: 45 x 100 cm  
 Dimensions of the top tray: 30 x 60 cm  
 Materials:  
 - Steel for the tubes, bars and trays  
 - ABS for tube tips and knobs  
 Finish: anthracite epoxy paint



# SUPPORTS



## MEDIAstage1

Aluminium stand for mobile phones

Code : H10495



For 3.5 to 5.5 inch phones  
Material: Aluminium  
Dimensions (WxHxD): 38 x 381 x 25 mm  
Folded dimensions (WxHxD):  
38 x 168 x 25 mm  
Arm length (unfolded): 238 mm  
Stand depth: 17,5 mm  
Stand height: 57 to 89 mm  
Weight: 130 grams



## MEDIAstage2

Aluminium stand with clamp for mobile phones and tablets

Code : H10496



Suitable for smartphones and tablets from 4 to 11 inches  
Aluminium structure, 500g  
Maximum load 1 kg



## MEDIAstage3

Aluminium stand with 1 suction cup for tablets and smartphones

Code : H10494



Suitable for smartphones and tablets from 4 to 11 inches  
Aluminium structure, 500g  
Maximum load 1 kg



## MEDIAstage4

Aluminium stand with double suction cups for tablets and smartphones

Code : H10493



Suitable for smartphones and tablets from 4 to 11 inches  
Aluminium structure, 500g  
Maximum load 1 kg



## MEDIAstage5

Aluminium stand with 1 suction cup for mobile phones and tablets

Code : H10654



## MEDIAstage6

Aluminium stand for mobile phones and tablets

Code : H10655



## MEDIA2

Tablet holder to attach to microphone stand

Code : H10457





**LAPTOP STAND**  
Universal computer stand

Code : B03195



**MEDIA4**  
Magnesium series adjustable multimedia stand

Code : H9664



**MEDIA3**  
Laptop stand with table mounts

Code : H10456



Universal laptop stand  
Easily attaches to the vertical parts of your flight bag  
Easily attaches to a table  
Adaptable in many ways, thanks to intelligent design:  
Adaptable width, thanks to 4 expansion adapters: 235mm to 285mm  
Adaptable height: 250mm to 380mm  
Durable and stable metal design in black finish.  
All accessories (buttons, table/rack clamps, extension adapter) are included.  
Weight: 2.3kg (all included)  
Max. height: 380mm  
Minimum height: 250mm  
Max. width: 285mm  
Min. width: 235mm

Net weight: 2.8 Kg  
Height: from 17 to 30 cm  
Width (from the top): from 29 to 39 cm  
Materials:  
- Steel  
- ABS for the knobs and bar tips  
Finish: anthracite epoxy paint




<b>A</b>	EYEM08 Code : H11084	Male hanging ring MWL 140kg	
<b>B</b>	EYEM10 Code : H11085	Male hanging ring MWL 230kg	
<b>C</b>	SUPPLAT Code : H7903	Plastic support plate for 36 mm stand Platinum 180 x 120 mm	
<b>D</b>	M10 Eyebolt (4 pcs) Code : B00658	Eyebolt without M10 screws (4 pcs)	
<b>E</b>	M8 Eyebolt (4 pcs) Code : B00657	Eyebolt without M8 screws (4 pcs)	
<b>F</b>	CPL-35 Code : H8248	Cup with M8 screw for 35 mm stand	
<b>G</b>	HOOK-12 Code : H8844	Harp shackle 12 mm - 500 Kg	

<b>H</b>	SHA1000 Code : H11082	Steel Shackle CMU 1000Kg	
<b>I</b>	SHA1500 Code : H11083	Steel Shackle CMU 1500Kg	
<b>J</b>	C0-12 Code : B02645	Reinforced cup ø12cm.	
<b>K</b>	CPL-28 Code : H8255	Cup with M8 screw For 28 mm stand	
<b>L</b>	C-35 Code : H8247	Metal speaker baseplate	
<b>M</b>	CPL-12 Code : H3239	Super reinforced cup Diameter 12 cm	



# WALL BRACKETS

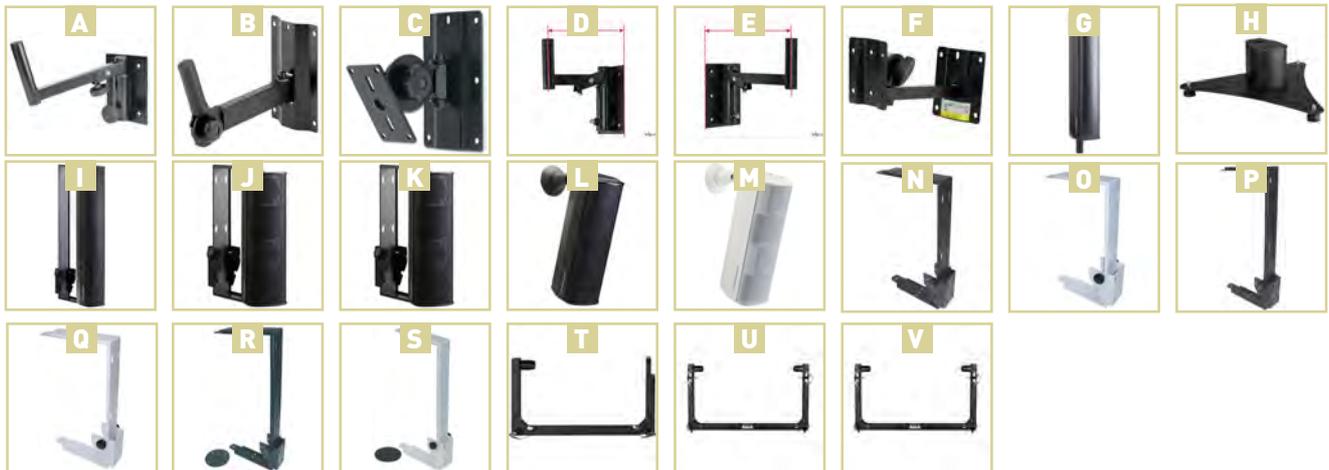

<b>A</b>	SUPWALL Code : H9104	Adjustable wall mount for speakers up to 40Kg
<b>C</b>	BS/6-1 Code : H7906	Adjustable wall mount for speakers up to 20kg
<b>E</b>	WB-L30 Code : B00761	Wall mount 30cm, 40kg
<b>G</b>	iLINEspace60 Code : H10759	Increase height by 60cm for iLINE83B with stackable connector base

<b>B</b>	BS/5-1 Code : H7907	Articulated wall baseplate for large speakers up to 40 Kg
<b>D</b>	WB-L20 Code : B00760	Wall mount 20cm, 40kg
<b>F</b>	BYR Code : H1075	Wall mount for rotating speaker

<b>H</b>	iLINEbase Code : H10760	Floor bracket for iLINE83B and iLINESPACE60
<b>J</b>	iLINE43sup Code : H10755	Wall bracket for iLINE43 column
<b>L</b>	iLINE24sup Code : H10773	Adjustable wall bracket for iLINE23 and iLINE43
<b>N</b>	SUPS6/NO Code : H9705	Hanging bracket for S6 satellite - black
<b>P</b>	SUPS8/NO Code : H9707	Mounting bracket for S8 satellite - black
<b>R</b>	SUPS10/NO Code : H9709	Mounting bracket for S10 satellite - black
<b>T</b>	Bracket for SC-08 Code : B09184	Robust foldable stand for SC-08 speaker
<b>V</b>	Bracket for SC-15 Code : B09186	Robust Foldable Stand for SC-15 Speaker

<b>I</b>	iLINE83sup Code : H10757	Wall bracket for iLINE83 column
<b>K</b>	iLINE23sup Code : H10753	Wall bracket for iLINE23 column
<b>M</b>	iLINE24supw Code : H10945	Swivel wall bracket for iLINE23/iLINE43-White
<b>O</b>	SUPS6/WH Code : H9706	Mounting bracket for S6 satellite - white
<b>Q</b>	SUPS8/WH Code : H9708	Mounting bracket for S8 satellite - white
<b>S</b>	SUPS10/WH Code : H9710	Mounting bracket for S10 satellite - white
<b>U</b>	Bracket for SC-12 Code : B09185	Robust Foldable Stand for SC-12 Speaker

# PROTECTIVE COVERS



<b>A</b>	COV-MOJ0500LINE Code : H10867	Protective cover for MOJ0500LINE subwoofer
<b>C</b>	COV-SX15A Code : H10855	Protective bag for SX15A
<b>E</b>	iLINEcov Code : H10768	Protective bag for iLINE series subwoofers
<b>G</b>	COV-ATOM12A Code : H10785	Protective bag for ATOM12A
<b>I</b>	COV-ATOM15ASUB Code : H10787	Protective bag for ATOM15ASUB
<b>K</b>	COV-SR15 Code : H10169	Bag for SR15A speaker
<b>M</b>	COV-SR10 Code : H10167	Bag for SR10A speaker
<b>O</b>	COV-CR25A Code : H10791	Protective bag for CR25A-COMBO
<b>Q</b>	COV-CR80A Code : H10431	Bag for CR80A-COMBO loudspeaker
<b>S</b>	TOURING BAG Code : B00597	Carrying bag for PS-15/PSA-15
<b>U</b>	TOURING BAG - Vibe 15 Code : B00592	Carrying bag for Vibe 15
<b>W</b>	TOURING BAG - Vibe 18 SUB Code : B00595	Carrying Bag for Vibe 18 SUB
<b>Y</b>	COV-SUBOCTAVEMKII Code : H11131	Cover for SUBoctave MKII - Black
<b>A1</b>	TOT-BAGBASES Code : H11137	Bags for TOTEM (ground & top)
<b>C1</b>	TOT-BAGUNO4x150 Code : H11135	Bags for 4x tubes UNO 150
<b>E1</b>	PID1-BAG Code : H10012	Bag for light stand type PID100&240
<b>G1</b>	CAB1-BAG Code : H10010	Bag for one speaker stand type CAB100&200
<b>I1</b>	BAG-STAND Code : B00741	Carrying bag for different light/speaker stands
<b>K1</b>	MIC5-BAG Code : H10009	Bag for 5 microphone tripods type MIC-100
<b>M1</b>	BAG-STAND Code : B00741	Carrying bag for different light/speaker stands

<b>B</b>	COV-SX12A Code : H10854	Protective bag for SX12A
<b>D</b>	iLINEbag Code : H10767	Carrying bag for 2 iLINE 8 HP columns or 2 iLINEspace 60
<b>F</b>	COV-ATOM10A Code : H10784	Protective bag for ATOM10A
<b>H</b>	COV-ATOM15A Code : H10786	Protective bag for ATOM15A
<b>J</b>	COV-ATOM18ASUB Code : H10788	Protective bag for ATOM18ASUB
<b>L</b>	COV-SR12 Code : H10168	Bag for SR12A speaker
<b>N</b>	COV-MOJ01000FX Code : H10350	Travel bag + trolley for MOJ01000FX
<b>P</b>	COV-CR12A Code : H10208	Bag for CR12A-COMBO loudspeaker
<b>R</b>	TOURING BAG - PS-12/PSA-12 Code : B00596	Protective cover for PS-12, PSA-12, PPA-121
<b>T</b>	TOURING BAG - Vibe 12 Code : B00591	Carrying bag for Vibe 12
<b>V</b>	TOURING BAG - Vibe 15 SUB Code : B00594	Carrying bag for Vibe 15 SUB
<b>X</b>	TOURING BAG - Vibe 30 Code : B00593	Carrying bag for Vibe 30
<b>B1</b>	TOT-BAGUNO4x100 Code : H11134	Bags for 4x tubes UNO 100
<b>D1</b>	TOT-BAGUNO4x200 Code : H11136	Bags for 4x tubes UNO 200
<b>F1</b>	PID2-BAG Code : H10013	Bag for 2 light stands type PID100&240
<b>H1</b>	CAB2-BAG Code : H10011	Bag for 2 speaker stands type CAB100&200
<b>J1</b>	MIC1-BAG Code : H10008	Bag for one MIC-100 microphone tripod
<b>L1</b>	BAG-MIC Code : B00742	Carrying bag for mic floor stand
<b>N1</b>	KB-BAG Code : H10007	Bag for X-shaped control stand type KB




# BATTERIES




<b>A</b>	PILE-LR03	AAA Battery - Blister alkaline battery 4 x 1.5 V	Code : H8147
<b>B</b>	PILE-LR06	AA Battery - Blister alkaline battery 4 x 1.5 V	Code : H8148
<b>C</b>	PILE-6LR61	Blister alkaline battery 1 x 9 V	Code : H8146
<b>D</b>	PILE-VI-6LR61	VARTA INDUSTRIAL 9V battery (in blister of 20)	Code : H10743
<b>E</b>	PILE-VI-LR6	AA Battery - VARTA INDUSTRIAL 1.5V LR06 battery (in blister of 10)	Code : H10744
<b>F</b>	PILE-VI-LR3	AAA Battery VARTA INDUSTRIAL 1.5V LR03 battery (in blister of 10)	Code : H10745
<b>G</b>	PILE-VCR2025	VARTA CR2025 button battery (in blister of 10)	Code : H10746

# GAFFAS

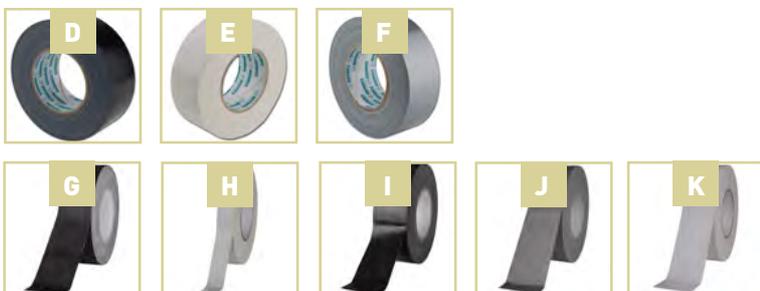

<b>D</b>	GAFFA-PRO/NO	Gaffa 50mm x 50m professional black	Code : H3956
<b>E</b>	GAFFA-PRO/WH	Roll of 50 m x 5 cm canvas - White	Code : H8874
<b>F</b>	GAFFA-PRO/GR	Roll of 50m x 5cm canvas - Grey	Code : H8875
<b>G</b>	GAFFER TAPE MATT 50 BLACK	High quality matt black canvas tape of 50m x 5 cm.	Code : B06104
<b>H</b>	GAFFER TAPE STD 25 WHITE	High quality white tape 50m x 25mm.	Code : B06103
<b>I</b>	GAFFER TAPE STD 50 BLACK	High quality black canvas tape 50m x 5 cm.	Code : B06100
<b>J</b>	GAFFER TAPE STD 50 GREY	High-quality grey canvas tape 50m x 5 cm.	Code : B06101
<b>K</b>	GAFFER TAPE STD 50 WHITE	High-quality white canvas tape 50m x 5 cm.	Code : B06102

# COLOURING

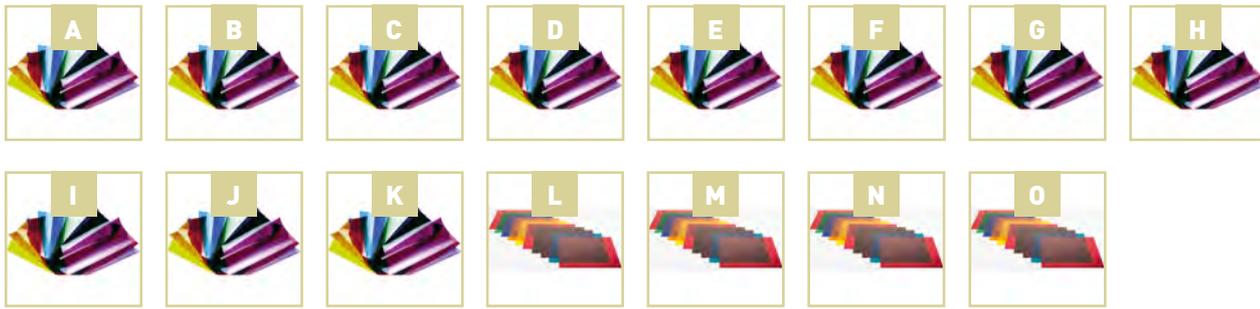

<b>A</b>	COLOR FILTER Sheet «Congo Blue 181»	1.22 x 0.53m "Congo Blue 181" colour sheet	Code : B04564	
<b>B</b>	COLOR FILTER Sheet «Dark Green 124»	1.22 x 0.53m "Dark Green 124" colour sheet	Code : B04566	
<b>C</b>	COLOR FILTER Sheet «Magenta 113»	1.22 x 0.53m "Magenta 113" colour sheet	Code : B04567	
<b>D</b>	COLOR FILTER Sheet «Mauve 126»	1.22 x 0.53m "Mauve 126" colour sheet	Code : B04569	
<b>E</b>	COLOR FILTER Sheet «Medium Blue-Green»	1.22 x 0.53m "Medium Blue-Green" colour sheet	Code : B04568	
<b>F</b>	COLOR FILTER Sheet «Orange 105»	1.22 x 0.53m "Orange 105" colour sheet	Code : B04561	
<b>G</b>	COLOR FILTER Sheet «Primary Green 139»	1.22 x 0.53m "Primary Green 139" colour sheet	Code : B04565	
<b>H</b>	COLOR FILTER Sheet «Primary Red 106»	1.22 x 0.53m "Primary Red 106" colour sheet	Code : B04562	
<b>I</b>	COLOR FILTER Sheet «Sky Blue 068»	1.22 x 0.53m "Sky Blue 068" colour sheet	Code : B04563	
<b>J</b>	COLOR FILTER Sheet «Vanity Fair 793»	1.22 x 0.53m "Vanity Fair 793" colour sheet	Code : B04570	
<b>K</b>	COLOR FILTER Sheet «Yellow 101»	1.22 x 0.53m "Yellow 101" colour sheet	Code : B04560	
<b>L</b>	FILTER SHEETS PAR56 SH - 10 col.	Set of filters, 10 different colours	Code : B04551	
<b>M</b>	FILTER SHEETS PAR56 SH - 5 col.	Set of filters, 5 different colours	Code : B04550	
<b>N</b>	FILTER SHEETS PAR64 PRO- 10 col.	Set of filters, 10 different colours	Code : B04555	
<b>O</b>	FILTER SHEETS PAR64 PRO- 5 col.	Set of filters, 5 different colours	Code : B04554	



# GOOSENECK LIGHTS



<b>A</b>	Snake16USB	Flexible lamp with 6 white COB LEDs - USB	Code : H10802
<b>B</b>	Snake16	1-arm desk lamp with 6 white COB LEDs	Code : H10803
<b>C</b>	Snake23DUO	2-arm desk lamp with 3 white COB LEDs	Code : H10804
<b>D</b>	Snake118DeskW	Desk lamp with 18 warm white COB LEDs	Code : H10805
<b>E</b>	Snake118DeskC	Desk lamp with 18 cool white COB LEDs	Code : H10806
<b>F</b>	Snake16M	Flexible LED lamp + magnetic baseplate + Battery	Code : H10807
<b>G</b>	Snake26Rack	2-arm USB rack light with white LEDs	Code : H10808
<b>H</b>	Snake16RGBUSB	Flexible lamp with 6 RGB COB LEDs - USB	Code : H10809

# VELCRO



<b>A</b>	VELCRO-30 Code : H8876	VELCRO 25 x 300 mm strap	 Hilec LIGHT & SOUND ACCESSORIES
<b>B</b>	VELCRO-60 Code : H8877	VELCRO 45 x 600 mm strip	 Hilec LIGHT & SOUND ACCESSORIES

# LINE AUDIO CABLES

	CFLAT-XXMF/0.5 Code : H10810	XLR male / XLR female flat cable - 0.5m
	CFLAT-XXMF/1 Code : H10811	XLR female / XLR male flat cable - 1m
	CFLAT-XXMF/1.5 Code : H10812	XLR female / XLR male flat cord - 1.5m

	CFLAT-JSXF/0.5 Code : H10816	TRS Male / XLR Female 6.35 jack flat cable - 0.5m
	CFLAT-JSXF/1 Code : H10817	TRS Male / XLR Female 6.35 jack flat cable - 1m
	CFLAT-JSXF/1.5 Code : H10818	XLR Female / Jack 6.35 TRS Male flat cord - 1.5m

	CFLAT-RCA/0.5 Code : H10822	RCA male / RCA male flat cable - 0.5m
	CFLAT-RCA/1 Code : H10823	RCA male / RCA male flat cable - 1m
	CFLAT-RCA/1.5 Code : H10824	RCA male / RCA male flat cord - 1.5m

	CL-32/1.5 Code : H10668	Stereo / 2 x XLR male 3.5 jack cable - 1.5m
	CL-32/3 Code : H10669	Stereo / 2 x XLR male 3.5 jack cable - 3m

	CL-29/0.6 Code : H10671	1 XLR male / 2 x XLR female cable - 0.6m

	CL-41/1.5 Code : H10674	2 x XLR male / 2 x stereo male jack cable - 1.5m
	CL-41/3 Code : H10675	2 x XLR male / 2 x stereo male jack cable - 3m

	CL-43/1.5 Code : H10678	2 x XLR female / 2 x stereo male jack cable - 1.5m
	CL-43/3 Code : H10679	2 x XLR female / 2 x stereo male jack cable - 3m

	ADAPT2010 Code : H10697	Female / 2 x RCA male 3.5 jack cable

	CL-05/1.5 Code : H7976	Male 6mm jack / Mono male jack line cable - 1.5m
	CL-05/3 Code : H7977	Male 6mm jack / Mono male jack line cable - 3m
	CL-05/6 Code : H7978	Male 6mm jack / Mono male jack line cable - 6m
	CL-05/10 Code : H7979	Male 6mm jack / Mono male jack line cable - 10m

	CFLAT-JSJS/0.5 Code : H10813	TRS jack / TRS jack flat cable - 0.5m
	CFLAT-JSJS/1 Code : H10814	TRS jack / TRS jack flat cable - 1m
	CFLAT-JSJS/1.5 Code : H10815	Jack TRS / Jack TRS flat cord - 1.5m

	CFLAT-JSXM/0.5 Code : H10819	TRS Male / XLR Male 6.35 jack flat cable - 0.5m
	CFLAT-JSXM/1 Code : H10820	TRS Male / XLR Male 6.35 jack flat cable - 1m
	CFLAT-JSXM/1.5 Code : H10821	XLR Male / Jack 6.35 TRS Male flat cord - 1.5m

	CFLAT-JMJM/0.5 Code : H10825	6.35 J mono / 6.35 J mono flat cable - 0.5
	CFLAT-JMJM/1 Code : H10826	Mono 6.35 jack / mono 6.35 jack flat cable - 1
	CFLAT-JMJM/1.5 Code : H10827	J 6.35 Mono / J 6.35 mono flat cord - 1.5

	CL-28/0.6 Code : H10670	1 XLR female / 2 x XLR male cable - 0.6m

	CL-40/1.5 Code : H10672	2 x mono 6.35 jack / 2 x XLR male cable - 1.5m
	CL-40/3 Code : H10673	2 x mono 6.35 jack / 2 x XLR male cable - 3m

	CL-42/1.5 Code : H10676	2 x XLR female / 2 x mono male jack cable - 1.5m
	CL-42/3 Code : H10677	2 x XLR female / 2 x mono male jack cable - 3m

	CL-2XM2XF/0.6 Code : H10680	2 x XLR Male / 2 x XLR Female cable - 0.6m
	CL-2XM2XF/1.5 Code : H10681	2 x XLR female / 2 x XLR Male cable - 1.5m
	CL-2XM2XF/3 Code : H10682	2 x XLR Male / 2 x XLR female cable - 3m
	CL-2XM2XF/6 Code : H10683	2 x XLR Male / 2 x XLR female cable - 6m

	ADAPT2020 Code : H10698	1 stereo male 3.5 jack / 2 stereo female 3.5 jack cable - Black

	CL/JMJM-1.5 Code : H7980	Male jack / Mono male jack line cable - 1.5m
	CL/JMJM-3 Code : H7981	Male jack / Mono male jack line cable - 3m
	CL/JMJM-6 Code : H7982	Male jack / Mono male jack line cable - 6m
	CL/JMJM-10 Code : H7983	Male jack / Mono male jack line cable - 10m
	CL/JMJM-20 Code : H7984	Male jack / Mono male jack line cable - 20m



# LINE AUDIO CABLES

**tasker**



<b>A</b>	PRE-DPR-RF311black Code : B01050	MF114ZW01 - Signal de câble assemblé, C11
<b>C</b>	PRE-DPR-RF3110black Code : B01053	MF114ZW10 - Signal de câble assemblé, C1
<b>E</b>	PRE-DPR-RF333black Code : B01060	MF128ZW03 - Signal de câble assemblé, C12
<b>G</b>	PRE-DPR-RF3310black Code : B01062	MF128ZW10 - Signal de câble assemblé, C1
<b>I</b>	RF143 Code : B01000	Signal de câble assemblé, C114bl+NP2C/NP2C 3m
<b>K</b>	RF149 Code : B01002	Signal de câble assemblé, C114bl+NP2C/NP2C 9m
<b>M</b>	RF213 Code : B01005	Signal de câble assemblé, C114bl+NP2C/NC3FX 3m
<b>O</b>	RF219 Code : B01007	Signal de câble assemblé, C114bl+NP2C/NC3FX 9m

<b>B</b>	PRE-DPR-RF313black Code : B01051	MF114ZW03 - Signal de câble assemblé, C11
<b>D</b>	PRE-DPR-RF3120black Code : B01054	MF114ZW20 - Signal de câble assemblé, C1
<b>F</b>	PRE-DPR-RF335black Code : B01061	MF128ZW05 - Signal de câble assemblé, C12
<b>H</b>	PRE-DPR-RF3320black Code : B01063	MF128ZW20 - Signal de câble assemblé, C1
<b>J</b>	RF146 Code : B01001	Signal de câble assemblé, C114bl+NP2C/NP2C 6m
<b>L</b>	RF1412 Code : B01003	Signal de câble assemblé, C114bl+NP2C/NP2C 12m
<b>N</b>	RF216 Code : B01006	Signal de câble assemblé, C114bl+NP2C/NC3FX 6m
<b>P</b>	RF2112 Code : B01008	Signal de câble assemblé, C114bl+NP2C/NC3FX 12m

# SPEAKER CABLES

**tasker**



<b>A</b>	PRE-DPR-SS T23ZW03 Code : B01065	Câble de haut-parleur assemblé, 2xAW13 + 2xNL2	<b>B</b>	PRE-DPR-SS T23ZW05 Code : B01066	Câble de haut-parleur assemblé, 2xAW13 + 2xNL2
<b>C</b>	PRE-DPR-SS T23ZW10 Code : B01067	Câble de haut-parleur assemblé, 2xAW13 + 2xNL2	<b>D</b>	PRE-DPR-SS T23ZW15 Code : B01068	Câble de haut-parleur assemblé, 2xAW13 + 2xNL2
<b>E</b>	PRE-DPR-SS T23ZW20 Code : B01069	Câble de haut-parleur assemblé, 2xAW13 + 2xNL2	<b>F</b>	PRE-DPR-SS T27ZW03 Code : B01070	Câble haut-parleur assemblé, 4xAWG13 + 2xNL
<b>G</b>	PRE-DPR-SS T27ZW05 Code : B01071	Câble haut-parleur assemblé, 4xAWG13 + 2xNL	<b>H</b>	PRE-DPR-SS T27ZW10 Code : B01072	Câble haut-parleur assemblé, 4xAWG13 + 2xNL
<b>I</b>	PRE-DPR-SS T27ZW15 Code : B01073	Câble haut-parleur assemblé, 4xAWG13 + 2xNL	<b>J</b>	PRE-DPR-SS T27ZW20 Code : B01074	Câble haut-parleur assemblé, 4xAWG13 + 2xNL



# LINE AUDIO CABLES



CL-07/1.5 Code : H7995	Stereo Male jack 6,35 mm / stereo Male jack 6,35 mm line cable - 1.50m
CL-07/3 Code : H7996	Stereo Male jack 6,35 mm / stereo Male jack 6,35 mm line cable - 3m
CL-07/6 Code : H7997	Stereo Male jack 6,35 mm / stereo Male jack 6,35 mm line cable - 6m
CL-07/10 Code : H7998	Stereo Male jack 6,35 mm / stereo Male jack 6,35 mm line cable - 10m



CL-71/1.5 Code : H7999	Stereo Male 3.5 mm jack / stereo Male 6.35 jack line cable - 1.50m
CL-71/3 Code : H8000	Stereo Male 3.5 mm jack / stereo Male 6.35 jack line cable - 3m
CL-71/6 Code : H8001	Stereo Male 3.5 mm jack / stereo Male 6.35 jack line cable - 6m
CL-71/10 Code : H8002	Stereo Male 3.5 mm jack / stereo Male 6.35 jack line cable - 10m



CL-72/1.5 Code : H8003	Jack 3,5 mm stereo Male / Jack 3,5 stereo Male cord line - 1.50m
CL-72/3 Code : H8004	Jack 3,5 mm Stereo Male / Jack 3,5 stereo Male cord line - 3m
CL-72/6 Code : H8005	Jack 3,5 mm Stereo Male / Jack 3,5 stereo Male cord line - 6m
CL-72/10 Code : H8006	Jack 3,5 mm stereo Male / Jack 3,5 stereo Male cord line - 10m



CL-23/1.5 Code : H8007	2x4mm 2x Male jack 6,35 mm / 2xRCA Male line cable - 1.5m
CL-23/3 Code : H8008	2x4mm 2x Male jack 6,35 mm / 2xRCA Male line cable - 3m



CL-35/1.5 Code : H8009	2x4mm 1 stereo Male jack 6,35 mm / 2xRCA Male line cable - 1.5m
CL-35/3 Code : H8010	2x4mm 1 stereo Male jack 6,35 mm / 2xRCA Male line cable - 3m
CL-35/6 Code : H8011	2x4mm 1 stereo Male jack 6,35 mm / 2xRCA Male line cable - 6m



CL-36/1.5 Code : H9294	Stereo male 6.35 jack / 2 x mono 6.35 jack line cable - 1.5m
CL-36/3 Code : H9295	Stereo male 6.35 jack / 2 x mono 6.35 jack line cable - 3m



CL-25/1.5 Code : H8165	2x4mm 2xXLR Female / 2xRCA Male line cable - 1.5m
CL-25/3 Code : H8166	2x4mm 2xXLR Female / 2xRCA Male line cable - 3m



CL-26/1.5 Code : H8167	2x4mm 2xXLR Male / 2xRCA Male line cable - 1.5m
CL-26/3 Code : H8168	2x4mm 2xXLR Male / 2xRCA Male line cable - 3m



FL-22/1.5 Code : H8012	2x4mm 2x Male jack 6,35 mm / 2x Mono male jack 6,35 mm line cable - 1.5m
FL-22/3 Code : H8013	2x4mm 2x Male jack 6,35 mm / 2x Mono male jack 6,35 mm line cable - 3m
FL-22/6 Code : H8014	2x4mm 2x Male jack 6,35 mm / 2x Mono Male jack 6,35 mm line cable - 6m



CL-31/1.5 Code : H8015	2x4mm 1x stereo Male 3.5 jack / 2x Male jack 6,35 mm line cable - 1.5m
CL-31/3 Code : H8016	2x4mm 1x stereo Male 3.5 jack / 2x Male jack 6,35 mm line cable - 3m



CL-30/1.5 Code : H8017	2x4mm 1x stereo Male 3.5 jack / 2xRCA Male line cable 1.5m
CL-30/3 Code : H8018	2x4mm 1x stereo Male 3.5 jack / 2xRCA Male line cable 3m



CL-51/0.6 Code : H9299	DIN 5-pin male / DIN 5-pin male midi cable - 0.6m
CL-51/1 Code : H9300	DIN 5-pin male / DIN 5-pin male midi cable - 1m
CL-51/3 Code : H8019	DIN 5-pin male / DIN 5-pin male midi cable - 3m
CL-51/6 Code : H8020	DIN 5-pin male / DIN 5-pin male midi cable - 6m



RCA1/C Code : H0049	2 RCA male / 2 RCA male cable - 1.2 m
------------------------	---------------------------------------



CL-24/1.5 Code : H7964	2x4mm 2xRCA Male / 2xRCA Male line cable - 1.5m
CL-24/3 Code : H7965	2x4mm 2xRCA Male / 2xRCA Male line cable - 3m
CL-24/6 Code : H7966	2x4mm 2xRCA Male / 2xRCA Male line cable - 6m



CL-27/1.5 Code : H7967	2xRCA Female / 2xRCA Male line cable - 1.5m
CL-27/3 Code : H7968	2xRCA Female / 2xRCA Male line cable - 3m
CL-27/6 Code : H7969	2xRCA Female / 2xRCA Male line cable - 6m



RCA11/C Code : H7970	High quality cable - 2 RCA male / 2 RCA male - 1.20m
RCA13/C Code : H7971	High quality cable - 2 RCA male / 2 RCA male - 3m
RCA15/C Code : H7972	High quality cable - 2 RCA male / 2 RCA male - 5m



RCA/PH Code : H7973	2 RCA male / 2 RCA male cable + mass - 3m
------------------------	---



INSERT-JACKm-1M5 Code : B01240	Insert cable - stereo jack 6,35 mm - 2x mono jack 6,35 mm - 1.5m
INSERT-JACKm-3M Code : B01241	Insert cable - stereo jack 6,35 mm - 2x mono jack 6,35 mm - 3m

# MICROPHONE CABLES



CM/XFXM-0,6 Code : H9298	XLR female / XLR male microphone cable - 0,6m
CM/XFXM-1,5 Code : H7947	XLR female / XLR male microphone cable - 1.5m
CM/XFXM-3 Code : H7948	XLR female / XLR male microphone cable - 3m
CM/XFXM-6 Code : H7949	XLR female / XLR male microphone cable - 6m
CM/XFXM-10 Code : H7950	XLR female / XLR male microphone cable - 10m
CM/XFXM-20 Code : H7951	XLR female / XLR male microphone cable - 20m



CM/XFJM-1,5 Code : H7952	XLR female / male jack 6,35 mm microphone cable - 1.5m
CM/XFJM-3 Code : H7953	XLR female / male jack 6,35 mm microphone cable - 3m
CM/XFJM-6 Code : H7954	XLR female / male jack 6,35 mm microphone cable - 6m
CM/XFJM-10 Code : H7955	XLR female / male jack 6,35 mm microphone cable - 10m
CM/XFJM-20 Code : H7956	XLR female / male jack 6,35 mm microphone cable - 20m



CM/XMJM-1,5 Code : H9296	XLR male / mono male 6.35 jack microphone cable - 1.5m
CM/XMJM-3 Code : H9297	XLR male / mono male 6.35 jack microphone cable - 3m
CM/XMJM-6 Code : H7957	XLR male / mono male 6.35 jack microphone cable - 6m
CM/XMJM-10 Code : H7958	XLR male / mono male 6.35 jack microphone cable - 10m



# SPEAKER CABLES

	CH/JMJM-1.5 Code : H8023	Male jack 6,35 mm / Male jack 6,35 mm 2x1.5 HP cable - 1.5m
	CH/JMJM-3 Code : H8024	Male jack 6,35 mm / Male jack 6,35 mm 2x1.5 HP cable - 3m
	CH/JMJM-10 Code : H8025	Male jack 6,35 mm/ Male jack 6,35 mm 2x1.5 HP cable - 10m
	CH/JMJM-15 Code : H8026	Male jack / Male jack 2x1.5 HP cable - 15m

	CSP215/0.5 Code : H10695	2 speaker cable x 1.5 mm <sup>2</sup> speakon/speakon NEUTRIK - 0.5m
	CSP215/1 Code : H10696	2 speaker cable x 1.5 mm <sup>2</sup> speakon/speakon NEUTRIK - 1m
	CSP215/3 Code : H9840	2 speaker cable x 1.5 mm <sup>2</sup> speakon/speakon NEUTRIK - 3m
	CSP215/6 Code : H9841	2 speaker cable x 1.5 mm <sup>2</sup> speakon/speakon NEUTRIK - 6m
	CSP215/10 Code : H9842	2 speaker cable x 1.5 mm <sup>2</sup> speakon/speakon NEUTRIK - 10m

	CH/SMJM-3 Code : H8034	Speakon Male / Male jack 6,35 mm 2x1.5 HP cable - 3m
	CH/SMJM-6 Code : H8035	Speakon Male / Male jack 6,35 mm 2x1.5 HP cable - 6m
	CH/SMJM-10 Code : H8036	Speakon Male / Male jack 6,35 mm 2x1.5 HP cable - 10m
	CH/SMJM-20 Code : H8037	Speakon Male / Male jack 6,35 mm 2x1.5 HP cable - 20m

	CS-21/3 Code : H8038	Speakon Male / speakon Male 2x1.5 HP cable - 3m
	CS-21/6 Code : H8039	Speakon Male / speakon Male 2x1.5 HP cable - 6m
	CS-21/10 Code : H8040	Speakon Male / speakon Male 2x1.5 HP cable - 10m
	CS-21/15 Code : H8041	Speakon Male / speakon Male 2x1.5 HP cable - 15m
	CS-21/20 Code : H8042	Speakon Male / speakon Male 2x1.5 HP cable - 20m

**NEUTRIK**

# DMX CABLES

	CDU0-10 Code : H9274	VDE / CEE - XLR male / XLR female hybrid audio cable - 10 metres
	CDU0-20 Code : H9293	VDE / CEE - XLR male / XLR female Hybrid Sound Cord - 20 meters

	AUDIO COMBI CABLE SCHUKO/XLR-10M Code : B01404	VDE / CEE - XLR male / XLR female Hybrid Sound Cord - 10 meters
	AUDIO COMBI CABLE SCHUKO/XLR-20M Code : B01405	VDE / CEE - XLR male / XLR female Hybrid Sound Cord - 20 meters
	AUDIO COMBI CABLE SCHUKO/XLR-5M Code : B01403	VDE / CEE - XLR male / XLR female Hybrid Sound Cord - 5 meters

	AUDIO COMBI CABLE IEC/XLR-10M Code : B01401	IEC / XLR Male / XLR Female Hybrid Sound Cord - 10 Meters
	AUDIO COMBI CABLE IEC/XLR-20M Code : B01402	IEC / XLR Male / XLR Female Hybrid Sound Cord - 20 Meters
	AUDIO COMBI CABLE IEC/XLR-5M Code : B01400	IEC / XLR Male / XLR Female hybrid audio cable - 5 metres

# CONVERTER DANTE ⇔ ANALOG

	<b>NEW</b>
	ConvD2in Code : H11049

	<b>NEW</b>
	ConvD2out Code : H11050



# DMX CABLES



<b>A</b>	<b>CDMX-0.6</b> Code : H10699	DMX XLR male / XLR female 3 pin cable - 0.6m
	<b>CDMX-1</b> Code : H9273	Cable for DMX XLR Male / XLR female 3 pins Length: 1 m
	<b>CDMX-1.5</b> Code : H9288	Cord for DMX XLR Male / XLR female 3 pins Length: 1.5 m
	<b>CDMX-3</b> Code : H9289	Cord for DMX XLR Male / XLR female 3 pins Length: 3 m
	<b>CDMX-5</b> Code : H9290	Cord for DMX XLR Male / XLR female 3 pins Length: 5 m
	<b>CDMX-10</b> Code : H9291	Cord for DMX XLR Male / XLR female 3 pins Length: 10 m
	<b>CDMX-20</b> Code : H9292	Cord for DMX XLR Male / XLR female 3 pins Length: 20 m
<b>B</b>	<b>IPCD-1</b> Code : H10722	DMX 3P waterproof connection cable for IPZOOM - 1m
	<b>IPCD-2</b> Code : H10723	DMX 3P waterproof connection cable for IPZOOM - 2m
	<b>IPCD-5</b> Code : H10724	DMX 3P waterproof connection cable for IPZOOM - 5m

<b>C</b>	<b>BT-XLR3T05 KIT</b> Code : B05523	Modification kit to modify IP XLR3pin to 5 pins
<b>D</b>	<b>PRE-DPR-RF3301.5BLACK</b> Code : B01424	MF128ZW1,5 - Câble DMX 1,5m avec neutre
<b>E</b>	<b>PRE-5M5F1038ZW1,5 (BAG)</b> Code : B01407	Câble DMX 1,5m avec Neutrik XLR 5p black
<b>F</b>	<b>PRE-5M5F1038ZW03 (BAG)</b> Code : B01408	Câble DMX 3m avec Neutrik XLR 5p black
<b>G</b>	<b>PRE-5M5F1038ZW05 (BAG)</b> Code : B01409	Câble DMX 5m avec Neutrik XLR 5p black
<b>H</b>	<b>PRE-5M5F1038ZW10 (BAG)</b> Code : B01410	Câble DMX 10m avec Neutrik XLR 5p black
<b>I</b>	<b>PRE-5M5F1038ZW20 (BAG)</b> Code : B01411	Câble DMX 20m avec Neutrik XLR 5p black

# RJ45 / XLR ADAPTERS AUDIO & DMX



**NEW**



**BOXRJ4XF3**  
Code : H11044

RJ45/XLR3F adapter box for audio/DMX signal

**NEW**



**BOXRJ4XF5**  
Code : H11046

RJ45/XLR5F adapter box for audio/DMX signal

**NEW**



**BOXRJ4XM3**  
Code : H11043

RJ45/XLR3M adapter box for audio/DMX signal

**NEW**



**BOXRJ4XM5**  
Code : H11045

RJ45/XLR5M adapter box for audio/DMX signal



# DMX COMBI CABLES

	CPCDMXLINK-1 Code : H10686	POWERCON / XLR hybrid cable 3G1.5mm <sup>2</sup> - 1m
	CPCDMXLINK-3 Code : H10687	POWERCON / XLR hybrid cable 3G1.5mm <sup>2</sup> - 3m
	CPCDMXLINK-5 Code : H10688	POWERCON / XLR hybrid cable 3G1.5mm <sup>2</sup> - 5m

	CPCDMXIN-3 Code : H10689	POWERCON-PC16A / XLR hybrid cable 3G1.5mm <sup>2</sup> - 3m
	CPCDMXIN-5 Code : H10690	POWERCON-PC16A / XLR hybrid cable 3G1.5mm <sup>2</sup> - 5m
	CPCDMXIN-10 Code : H10691	POWERCON-PC16A / XLR hybrid cable 3G1.5mm <sup>2</sup> - 10m

	COMBI CABLE IEC/XLR-1M3 Code : B01255	Power(IEC)+DMX cable 1.3m
	COMBI CABLE IEC/XLR 3M Code : B01256	Power(IEC)+DMX cable 3.0m
	COMBI CABLE IEC/XLR 5M Code : B01257	Power(IEC)+DMX cable 5.0m
	COMBI CABLE IEC/XLR 10M Code : B01258	Power(IEC)+DMX cable 10.0m

	POWERCON/XLR COMBI 3x1.5mm <sup>2</sup> CABLE 1M3 Code : B01263	1.3 m POWERCON Neutrik / XLR hybrid cable 3G1.5mm <sup>2</sup>
	POWERCON/XLR COMBI 3x1.5mm <sup>2</sup> CABLE 3M Code : B01264	3m POWERCON Neutrik / XLR hybrid cable 3G1.5mm <sup>2</sup>
	POWERCON/XLR COMBI 3x1.5mm <sup>2</sup> CABLE 5M Code : B01265	5m POWERCON Neutrik / XLR hybrid cable 3G1.5mm <sup>2</sup>
	POWERCON/XLR COMBI 3x1.5mm <sup>2</sup> CABLE 10M Code : B01266	10m POWERCON Neutrik / XLR hybrid cable 3G1.5mm <sup>2</sup>

# MULTI SOCKETS

	MULTISOCKET4-F** Code : B01352	

	MULTISOCKET4-G** Code : B01353	
	MULT4E Code : H10842	Power outlets 4 European outlets

	MULTIP4F Code : H10845	Power outlets 4 French sockets - IP44
	MULTIP4E Code : H10846	Power outlets 4 European outlets - IP44

	MULTIP6F Code : H10843	French extension socket 6 outlets - IP44
	MULTIP6E Code : H10844	European extension socket 6 outlets - IP44

	MULT6E Code : H10841	European extension socket 6 outlets

	MULTISOCKET4PRO-F-3M** Code : B01387	
	MULTISOCKET4PRO-F-5M** Code : B01389	

	MULTISOCKET4PRO-G-3M** Code : B01388	
	MULTISOCKET4PRO-G-5M** Code : B01390	

\*5-pole CEE extension cable with transparent heat-shrinkable sheath for custom labels.

\*\*4-outlet power distribution box with sliding mounting bracket and transparent heat-shrinkable sheath for custom labels.

	CPCLINK-0.5	NAC3FCA / NAC3FCB 3G0.75mm cable <sup>2</sup> ET Code : H10692
	CPCLINK-1	NAC3FCA / NAC3FCB 3G0.75mm cable <sup>2</sup> ET Code : H10693
	CPCLINK-1.5	NAC3FCA / NAC3FCB 3G0.75mm cable <sup>2</sup> ET Code : H10694

	IPCP-1	Waterproof electrical connection cable for IPZOOM -1m
	IPCP-2	Waterproof electrical connection cable for IPZOOM -2m
	IPCP-5	Waterproof electrical connection cable for IPZOOM -5m

	CPCIN-1	NAC3FCA / 3G1.5mm cable <sup>2</sup> / PC16A - 1m Code : H10684
	POWER CABLE CEE7/7-PowerCON 2M	Power cable CEE7/7 - PowerCON
	CPCIN-2.5	NAC3FCA / 3G1.5mm cable <sup>2</sup> / PC16A - 2.5m Code : H10685

	CPCIN3	Europe male / SEETRONIC cable - 3m / 3G1.5mm <sup>2</sup>
	CPCIN5	Europe male / SEETRONIC cable - 5m / 3G1.5mm <sup>2</sup>

	CEE-CABLE-32A-5G6-10M*	Code : B01392
	CEE-CABLE-32A-5G6-20M*	Code : B01393
	CEE-CABLE-32A-5G6-5M*	Code : B01391

	CEE-CABLE-63A-5G16-10M*	Code : B01395
	CEE-CABLE-63A-5G16-20M*	Code : B01396
	CEE-CABLE-63A-5G16-5M*	Code : B01394

	IECEUR3	IEC female / Europe male cable - 3m / 3G1mm <sup>2</sup>
	IECEUR5	IEC female / Europe male cable - 5m / 3G1mm <sup>2</sup>
	POWER CABLE CEE7/7-IEC 2M	Code : B01350 CEE7/7-IEC power cable 2M

	IECMF-1	IEC male / female 1m cables Code : H9889
	IEC Cable M/F 1M	IEC male / female 1m cables Code : B04151
	IECMF-3	IEC male / female 3m cables Code : H9890
	IECMF-5	IEC male / female 5m cables Code : H9891
	IEC Cable M/F 5M	IEC male / female 5m cables Code : B04152
	IECMF-7	IEC male / female 7m cables Code : H9892

	ALIM315/3	Extension cable with rubber plugs H07RN- F3G1.5 - 3m Code : H9848
	ALIM315/5	Extension cable with rubber plugs H07RN- F3G1.5 - 5m Code : H9849
	ALIM315/10	Extension cable with rubber plugs H07RN- F3G1.5 - 10m Code : H9850
	ALIM325/3	Extension cable with rubber plugs H07RN- F3G2.5 - 3m Code : H9851
	ALIM325/5	Extension cable with rubber plugs H07RN- F3G2.5 - 5m Code : H9852
	ALIM325/10	Extension cable with rubber plugs H07RN- F3G2.5 - 10m Code : H9853

	POWERCABLE-3G1,5-10M-F	Extension cable 3G1.5, 10m and French Schuko plug Code : B01377
	POWERCABLE-3G1,5-10M-G	Extension cable 3G1.5, 10m and German Schuko plug Code : B01380
	POWERCABLE-3G1,5-5M-F	Extension cable 3G1.5, 5m and French Schuko plug Code : B01376
	POWERCABLE-3G1,5-5M-G	Extension cable 3G1.5, 5m and German Schuko plug Code : B01379
	POWERCABLE-3G1,5-3M-F	Extension cable 3G1.5, 3m and French Schuko plug Code : B01375
	POWERCABLE-3G1,5-3M-G	Extension cable 3G1.5, 3m and German Schuko plug Code : B01378

	POWERCABLE TRUE1 2M	Câble d'alimentation 3x1,5mm <sup>2</sup> avec Powercon TRUE Code : B01440
---	---------------------	--

	POWERCABLE-3G2,5-20M-F	Extension cable 3G2.5, 20m and French Schuko plug Code : B01383
	POWERCABLE-3G2,5-20M-G	Extension cable 3G2.5, 20m and German Schuko plug Code : B01386
	POWERCABLE-3G2,5-15M-F	Powercable 3G2,5 and French Shuko connectors Code : B01447
	POWERCABLE-3G2,5-10M-F	Extension cable 3G2.5, 10m and French Schuko plug Code : B01382
	POWERCABLE-3G2,5-10M-G	Extension cable 3G2.5, 10m and German Schuko plug Code : B01385
	POWERCABLE-3G2,5-5M-F	Extension cable 3G2.5, 5m and French Schuko plug Code : B01381
	POWERCABLE-3G2,5-5M-G	Extension cable 3G2.5, 5m and German Schuko plug Code : B01384
	POWERCABLE-3G2,5-3M-F	Extension cable 3G2.5, 3m and French Schuko plug Code : B01397
	POWERCABLE-3G2,5-3M-G	Extension cable 3G2.5, 3m and German Schuko plug Code : B01398


	TRUE1/XLR-3P COMBI CABLE 1,5M	DMX + POWER 3x1,5mm <sup>2</sup> câble T Code : B01425
	TRUE1/XLR-5P COMBI CABLE 1,5M	DMX + POWER 3x1,5mm <sup>2</sup> câble T Code : B01412
	TRUE1/XLR-3P COMBI CABLE 3M	DMX + POWER 3x1,5mm <sup>2</sup> câble TRU Code : B01426
	TRUE1/XLR-5P COMBI CABLE 3M	DMX + POWER 3x1,5mm <sup>2</sup> câble TRU Code : B01413
	TRUE1/XLR-3P COMBI CABLE 5M	DMX + POWER 3x1,5mm <sup>2</sup> câble TRU Code : B01427
	TRUE1/XLR-5P COMBI CABLE 5M	DMX + POWER 3x1,5mm <sup>2</sup> câble TRU Code : B01428

	ADAPTER POWERCON M/F-TRUE1 F	Adapter Powercon M/F (NAC3FCB - NAC3FCA) to Powercon TRUE1 F (NAC3FX-W) Code : B01441
---	------------------------------	---

	ADAPTER TRUE1 M/F-POWERCON F	Adapter Powercon TRUE 1 M/F (NAC3FPX - NAC3MPX) to Powercon F (NAC3FCA) Code : B01442
---	------------------------------	---



# INSTALLATION CABLE AUDIO

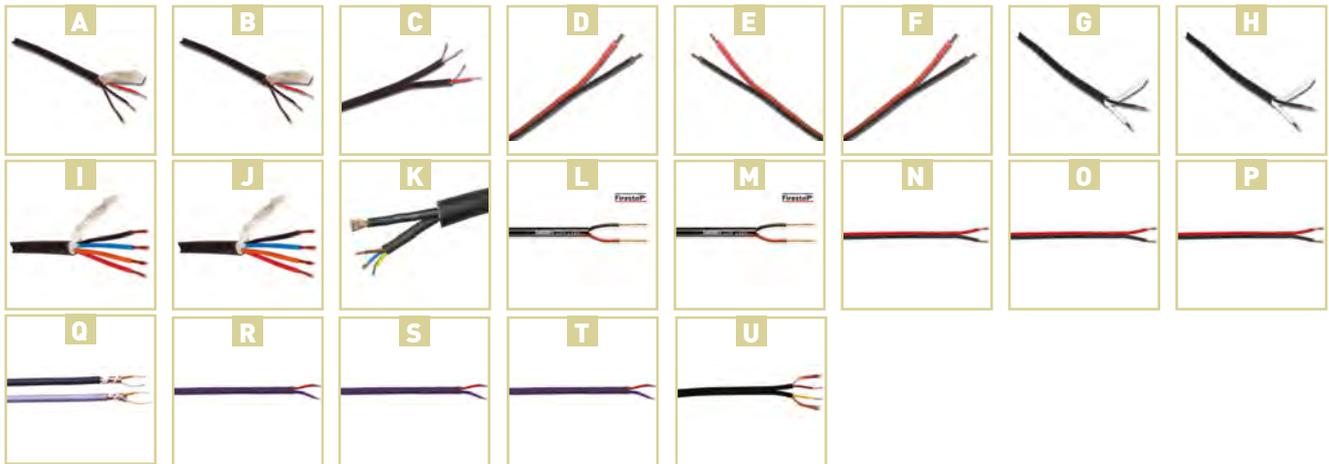

<b>A</b>	<b>PROMI/20</b> Code : H8099	6 mm black microphone cable - 100m coil
<b>B</b>	<b>PROMI/30</b> Code : H8100	6 mm black high quality microphone cable 100 m
<b>C</b>	<b>MEP/ASY</b> Code : H8103	Flat cable 2 x 4 mm <sup>2</sup> asymmetrical black- 100 m coil
<b>D</b>	<b>MEP-2075</b> Code : H8104	HP flat cable 2 x 0.75mm <sup>2</sup> red and black - 100 m coil
<b>E</b>	<b>MEP-2150</b> Code : H8105	HP Flat Cable 2 x 1.5 mm <sup>2</sup> rouge et noir - bobine de 100 m
<b>F</b>	<b>MEP-2200</b> Code : H8106	HP Flat Cable 2 x 2mm <sup>2</sup> rouge et noir - bobine de 100 m
<b>G</b>	<b>PROHP-215</b> Code : H8107	HP 2 x 1.5 mm cable <sup>2</sup> black - coil 100 m
<b>H</b>	<b>PROHP-225</b> Code : H8108	HP 2 x 2.5 mm cable <sup>2</sup> black - coil 100 m
<b>I</b>	<b>PROHP-425</b> Code : H8109	HP 4 x 2.5 mm cable <sup>2</sup> black - coil 50 m
<b>J</b>	<b>PROHP-440</b> Code : H8110	HP 4 x 4 mm cable <sup>2</sup> black - 50 m coil
<b>K</b>	<b>DUOSOUND</b> Code : H9855	Hybrid power cable 3 x 1.5 mm <sup>2</sup> + AUDIO - 50m

<b>L</b>	<b>TAS-C275lszh</b> Code : B01428	Low smoke/zero halogen Loudspeaker Cable 2*1
<b>M</b>	<b>TAS-C276lszh</b> Code : B01429	Low smoke/zero halogen Loudspeaker Cable 2*2
<b>N</b>	<b>C102 (2x2.50 r/z)</b> Code : B00935	Speaker cable, flat: 2x2.50mm <sup>2</sup> , red/black
<b>O</b>	<b>C102 (2x0.75 r/z)</b> Code : B00933	Speaker cable, flat: 2x0.75mm <sup>2</sup> , red/black
<b>P</b>	<b>C102 (2x1.50 r/z)</b> Code : B00934	Speaker cable, flat: 2x1.50mm <sup>2</sup> , red/black
<b>Q</b>	<b>C114 Black</b> Code : B00950	Bal. mic/audio cable, round: 2x0,25mm <sup>2</sup> , black
<b>R</b>	<b>C128 Black</b> Code : B00956	Bal. mic/audio cable, round: 2x0,35mm <sup>2</sup> , black
<b>S</b>	<b>C276 (2x2,5)</b> Code : B00960	Speaker cable, round: 2x2.50mm <sup>2</sup> , black, reel
<b>T</b>	<b>C275 (2x1,5)</b> Code : B00961	Speaker cable, round: 2x1.50mm <sup>2</sup> , black, reel
<b>U</b>	<b>C118 Black</b> Code : B00963	Stereo audio cable, round: 2x0,14mm <sup>2</sup> , black, 10

## REEL



<b>B</b>	<b>CAT6roll50</b> Code : H11048	CAT6Cable RJ45 Neutrik-50m Reel	<b>NEUTRIK</b>
----------	------------------------------------	---------------------------------	----------------



# VIDEO CABLES



**A** HDMI 2M  
Code : B01271 High speed HDMI cable

# LIGHT CABLE



**A** DUOLIGHT  
Code : H9854 Hybrid power cable 3 x 2.5 mm<sup>2</sup> + DMX - 50m

**B** DMX-DOUB  
Code : H8101 DMX digital cable 2 conductors black - price per metre

**C** DMX-QUAD  
Code : H8102 DMX digital cable 4 conductors black - price per meter

# ELECTRICAL CABLE



**A** TIT-315  
Code : H6755 Titanex cable LENS H07RNF 3 x 1.5 mm<sup>2</sup> 100m coil

**B** TIT-325  
Code : H6756 Titanex cable LENS H07RNF 3 x 2.5 mm<sup>2</sup> 100m coil

# CAT6 CABLE



**A** CAT6cable  
Code : H11047 CAT6 flexible cable 26AWG  
100m roll - Black



# NEUTRIK® CONNECTORS

	<b>NE8MC</b> Code : H10446	Cat5e RJ45 cable plug body
	<b>NE8FDP</b> Code : H10447	Female socket for v5e RJ45 cable
	<b>NC-3-FXX</b> Code : B01102	Neutrik XLR female connector for cable, 3-pin.
	<b>NC-3FXX</b> Code : H8846	3-pin NEUTRIK female XLR plug
	<b>NC-3-MXX</b> Code : B01101	Neutrik XLR male connector for cable, 3-pin.
	<b>NC-3MXX</b> Code : H8848	3-pin NEUTRIK male XLR plug
	<b>NC-3FX-HD</b> Code : H10714	NEUTRIK 3-pole XLR female IP67 water-proof plug
	<b>NC-3FX-HD</b> Code : H10715	NEUTRIK 3-pole XLR male IP67 water-proof plug
	<b>NC-5-FXX</b> Code : B01117	Neutrik XLR female connector for cable, 5-pin
	<b>NC-5FXX</b> Code : H8850	5-pin NEUTRIK female XLR plug
	<b>NC-5-MXX</b> Code : B01118	Neutrik XLR male connector for cable, 5-pin
	<b>NC-5MXX</b> Code : H8851	5-pin male XLR plug NEUTRIK
	<b>NC-3-FD-L-1</b> Code : B01127	Female XLR chassis, lockable, D-size, 3-pin from Neutrik.
	<b>NC-3FDLX</b> Code : H8852	NEUTRIK X series 3-pin female XLR socket
	<b>NC-3-MD-L-1</b> Code : B01128	Male XLR chassis, lockable, [D-size], 3 pins from Neutrik.
	<b>NC-3MDLX</b> Code : H8853	NEUTRIK X series 3-pin male XLR socket
	<b>NC-5-FDLX</b> Code : B01123	Neutrik D-size 5pin XLR-f CHASSIS
	<b>NC-5FDL1</b> Code : H4840	NEUTRIK D series 5-pin female XLR socket
	<b>NC-5-MDLX</b> Code : B01124	Neutrik D-size 5pin XLR-m CHASSIS
	<b>NC-5MDL1</b> Code : H4841	NEUTRIK D series 5-pin male XLR socket
	<b>NA-USB</b> Code : H8854	NEUTRIK D Series USB-A socket
	<b>NYS373-0</b> Code : H8855	NEUTRIK gold contact RCA plug - Black
	<b>NYS373-2</b> Code : H8856	NEUTRIK gold contact RCA plug - Red
	<b>NTP3RC</b> Code : H7946	NEUTRIK angled stereo 3.5 JACK plug
	<b>NP-2-X</b> Code : B01104	Neutrik 6.3mm JACK-m mono CABLE.
	<b>NP-2X</b> Code : H8859	NEUTRIK male mono 6.35 JACK plug
	<b>NP-3-X</b> Code : B01103	Neutrik 6.3mm JACK-m stereo CABLE
	<b>NP-3X</b> Code : H8861	NEUTRIK male stereo 6.35 JACK plug
	<b>NJ-3-FC-6</b> Code : B01106	Neutrik 6.3mm JACK-f stereo CABLE
	<b>NJ-3FC6</b> Code : H4846	NEUTRIK female stereo 6.35 jack plug
	<b>NJ-3-FP-6C</b> Code : B01105	Neutrik D-size stereo 6.3mm JACK-f CHASSIS
	<b>NJ-3FP6C</b> Code : H4848	NEUTRIK D series female stereo 6.35 JACK socket

	<b>NP2C-SILENT</b> Code : H8857	NEUTRIK anti-plock mono jack plug
	<b>NP2RX-SILENT</b> Code : H8858	NEUTRIK anti-plock angled mono jack plug
	<b>NC-3FRX</b> Code : H8863	3-pin NEUTRIK angled female XLR plug
	<b>NC-3MRX</b> Code : H8865	3-pin NEUTRIK angled male XLR plug
	<b>NP-2RX</b> Code : H4854	NEUTRIK angled male mono 6.35 JACK plug
	<b>NP-3RX</b> Code : H4855	NEUTRIK angled male stereo 6.35 JACK plug
	<b>NL-2FX</b> Code : H4856	NEUTRIK SPEAKON plug, 2 contacts
	<b>NL-4-FX</b> Code : B01113	Neutrik Speakon CABLE, 4 contacts.
	<b>NL-4FX</b> Code : H4857	NEUTRIK X series SPEAKON plug, 4 contacts
	<b>NL-4-MMX</b> Code : B01116	Neutrik 2x Speakon ADAPTER, 4 contacts.
	<b>NL-4MMX</b> Code : H4859	NEUTRIK X series SPEAKON coupler, 4 contacts
	<b>NL-2MP</b> Code : H4861	NEUTRIK D series SPEAKON socket, 2 contacts
	<b>NL-4-MP</b> Code : B01115	Neutrik Speakon CHASSIS, D-size, 4 contacts.
	<b>NL-4MP</b> Code : H4862	NEUTRIK 4-way SPEAKON 2-way socket
	<b>NL-4-MP-R</b> Code : B01114	Neutrik Speakon BIG CHASSIS, 4 contacts.
	<b>NL-4MPR</b> Code : H4863	NEUTRIK SPEAKON socket, 4 contacts, EP format
	<b>NAC3FX-W</b> Code : H10448	Powercon True one female plug
	<b>NAC3MX-W</b> Code : H10449	Powercon True one male plug
	<b>NAC3MPX</b> Code : H10450	Powercon True one male socket
	<b>NAC3FPX</b> Code : H10451	Powercon True one female socket
	<b>NAC3PX</b> Code : B01133	PowerCON TRUE1 appliance inlet-outlet combination with 1/4" flat tab terminals.
	<b>NAC-3-FCA</b> Code : B01125	Neutrik PowerCon inlet (blue) CABLE
	<b>NAC-3FCA</b> Code : H4865	NEUTRIK 240V 20A male power input plug, 3 contacts
	<b>NAC-3-FCB</b> Code : B01129	Neutrik PowerCon outlet (grey) CABLE
	<b>NAC-3FCB</b> Code : H4866	NEUTRIK 240V 20A male power output plug, 3 contacts
	<b>NAC-3-MPA</b> Code : B01126	Neutrik D-size PowerCon inlet (blue) CHASSIS
	<b>NAC-3MPA</b> Code : H4867	NEUTRIK 240V 20A power input socket, 3 contacts
	<b>NAC-3-MPB</b> Code : B01130	Neutrik D-size PowerCon outlet (grey) CHASSIS
	<b>NAC-3MPB</b> Code : H4868	NEUTRIK 240V 20A power output socket, 3 contacts

# NEUTRIK® CONNECTORS

	<b>NF2D0</b> Code : H10452	RCA socket, black, D format		<b>NC3FDLXBAG</b> Code : B01141	X series 3-pin female XLR socket / black - NEUTRIK
	<b>NF2D2</b> Code : H10453	RCA socket, red, D format		<b>NC3MDLXBAG</b> Code : B01140	X series 3-pin male XLR socket / black - NEUTRIK
	<b>NA-3F5M</b> Code : H4869	NEUTRIK DMX XLR 3 fem. / XLR 5 male adapter		<b>NC3FXXBAG</b> Code : B01143	3-pin female XLR plug / black - NEUTRIK
	<b>NA-3M5F</b> Code : H4870	NEUTRIK DMX XLR 3 male / XLR 5 female adapter		<b>NC3MXXBAG</b> Code : B01142	3-pin female XLR plug / black - NEUTRIK
	<b>DBA</b> Code : B01119	cover for Neutrik D chassis			

# ELECTRICAL CONNECTORS

	<b>CEE100</b> Code : H0227	CEE 22 chassis - male		<b>CEE200</b> Code : H1659	CEE 22 chassis female
	<b>CEE300</b> Code : H0225	CEE 22 plug - male		<b>CEE400</b> Code : H0226	CEE 22 plug - female
	<b>FIC/MAL</b> Code : H1804	Male plastic plug 2 poles + earth		<b>FIC/FEM</b> Code : H1805	Female plastic plug 2 poles + earth
	<b>FIC/CAH/MAL</b> Code : H1806	Male rubber plug 2 poles + earth		<b>FIC/CAH/FEM</b> Code : H1807	Female plug 2 poles + earth
	<b>FIC/SCHU/MAL</b> Code : H8131	Male rubber plug IP44 schuko		<b>FIC/SCHU/FEM</b> Code : H8132	Female rubber plug IP44 standard French
	<b>BT-16FS-F</b> Code : B01406	Blue plug with IP44 cover, 230V/16A FRA/BEL			



# CONNECTORS

	<b>J35ST</b> Code : H10876	Chrome stereo 3.5 jack plug
	<b>J35STVIS</b> Code : H10828	Chrome stereo 3.5 jack plug with screws
	<b>FXF/CH</b> Code : H2487	AUDIOPHONY XLR female plug - chrome finish
	<b>FXF/NO</b> Code : H7932	AUDIOPHONY X female plug - Black
	<b>FXM/CH</b> Code : H2488	AUDIOPHONY XLR male plug - chrome finish
	<b>FXM/NO</b> Code : H7933	AUDIOPHONY X male plug - Black
	<b>XFC-103</b> Code : H6586	AUDIOPHONY D Series XLR female chassis
	<b>XMC-103</b> Code : H6585	AUDIOPHONY D series XLR male chassis
	<b>XMK-105</b> Code : H6587	5-pin male XLR plug for the AUDIOPHONY DMX
	<b>XFK-105</b> Code : H6588	5-pin female XLR plug for the AUDIOPHONY DMX
	<b>FJM/CH</b> Code : H2495	AUDIOPHONY mono 6.35mm jack plug - chrome finish
	<b>FJS/CH</b> Code : H2496	AUDIOPHONY stereo 6.35mm jack plug - chrome finish
	<b>J350/MO</b> Code : H7936	AUDIOPHONY mono 6.35mm Jack female plug pro
	<b>J350/STE</b> Code : H7937	AUDIOPHONY professional stereo jack female plug - 6.35mm
	<b>J700</b> Code : H7939	Stereo 6.35 mm jack female chassis with AUDIOPHONY lock
	<b>RCA910/RO</b> Code : H7940	Red male RCA plug for AUDIOPHONY professional cable
	<b>RCA910/NO</b> Code : H7941	Black male RCA plug for AUDIOPHONY professional cable
	<b>RCA920/RO</b> Code : H7942	Red female RCA plug for AUDIOPHONY professional cable
	<b>RCA920/NO</b> Code : H7943	Black female RCA plug for AUDIOPHONY professional cable

	<b>BANA100/NO</b> Code : H1653	AUDIOPHONY male banana plug - Black
	<b>BANA100/RO</b> Code : H1652	AUDIOPHONY male banana plug - Red
	<b>BANA200/NO</b> Code : H1655	AUDIOPHONY female banana chassis - Black
	<b>BANA200/RO</b> Code : H1654	AUDIOPHONY female banana chassis - Red
	<b>BANA150/NO</b> Code : H6595	AUDIOPHONY connector for amplifier terminal block, black
	<b>BANA150/RO</b> Code : H6596	AUDIOPHONY connector for amplifier terminal block, red
	<b>BANA400/NO</b> Code : H7944	AUDIOPHONY 2 x female banana chassis - 1 Red / 1 Black

# ADAPTERS

	<b>ADAPT400</b> Code : H0505	<b>AUDIOPHONY RCA female / mono male 6.35 jack adapter</b>		<b>ADAPT500</b> Code : H0766	<b>AUDIOPHONY female 6.35 jack / RCA male adapter</b>
	<b>ADAPT600</b> Code : H1656	<b>AUDIOPHONY 2 RCA female / 1 RCA male adapter</b>		<b>ADAPT700</b> Code : H1657	<b>AUDIOPHONY RCA female / RCA female adapter</b>
	<b>ADAPT750</b> Code : H7927	<b>AUDIOPHONY 2 x RCA female / 2 RCA female adapter</b>		<b>ADAPT800</b> Code : H0767	<b>AUDIOPHONY female 6.35 jack / female 6.35 jack adapter</b>
	<b>ADAPT850</b> Code : H0506	<b>AUDIOPHONY 2 female 6.35 jack / 1 male 6.35 jack adapter</b>		<b>ADAPT900</b> Code : H1658	<b>AUDIOPHONY 2 RCA female / 1 stereo male 6.35 jack adapter</b>
	<b>ADAPT1000</b> Code : H7928	<b>AUDIOPHONY stereo female 3.5 jack / stereo male 6.35 jack adapter</b>		<b>ADAPT1005</b> Code : H7929	<b>AUDIOPHONY stereo female 6.35 jack / stereo male 3.5 jack adapter</b>
	<b>ADAPT1105</b> Code : H7931	<b>AUDIOPHONY stereo RCA female / stereo male 3.5 jack adapter</b>		<b>ADAPT1200</b> Code : H9278	<b>AUDIOPHONY stereo male 6.35 jack to 2 x 3 jack adapter</b>
	<b>ADA/XMXM</b> Code : H2500	<b>AUDIOPHONY XLR male / XLR male adapter</b>		<b>ADA/XFXF</b> Code : H2501	<b>AUDIOPHONY XLR female / XLR female adapter</b>
	<b>ADA/XFJF</b> Code : H2502	<b>AUDIOPHONY XLR female / female jack adapter</b>		<b>ADA/XMJF</b> Code : H2503	<b>AUDIOPHONY XLR male / female jack adapter</b>
	<b>ADA/XFRM</b> Code : H2504	<b>AUDIOPHONY XLR female / RCA male adapter</b>		<b>ADA/XMRM</b> Code : H2505	<b>AUDIOPHONY XLR male / RCA male adapter</b>
	<b>ADA/XFRF</b> Code : H2506	<b>AUDIOPHONY XLR female / RCA female adapter</b>		<b>ADA/XMRF</b> Code : H2507	<b>AUDIOPHONY XLR male / RCA female adapter</b>
	<b>ADA/XFJM</b> Code : H6560	<b>AUDIOPHONY XLR female / mono male jack adapter</b>		<b>ADA/XFJMS</b> Code : H6561	<b>AUDIOPHONY XLR female / stereo male jack adapter</b>
	<b>ADA/XMJM</b> Code : H6562	<b>AUDIOPHONY XLR male / mono male jack adapter</b>		<b>ADA/XMJMS</b> Code : H6563	<b>AUDIOPHONY XLR male / stereo male jack adapter</b>
	<b>ADA/XF5XM<sup>3</sup></b> Code : H7925	<b>AUDIOPHONY DMX XLR female 5 pins / XLR male 3 pins adapter</b>		<b>ADA/XM5XF3</b> Code : H7926	<b>AUDIOPHONY DMX XLR male 5 pins / XLR female 3 pins adapter</b>
	<b>AS/SF-SF</b> Code : H6583	<b>AUDIOPHONY speaker extension adapter, 2 contacts</b>		<b>PRE-5M3F1038ZW0.15 (BAG)</b> Code : B01423	<b>Adaptercable XLR 3p F - XLR 5p M</b>
	<b>PRE-3M5F1038ZW0.15 (BAG)</b> Code : B01422	<b>Adaptercable XLR 3p M - XLR 5p F</b>			



# CONSTRUCTION

	<b>POIGNSURF</b> Code : H0279	Recessed spring surface handle		<b>POIGNRENOI</b> Code : H0280	Recessed spring return handle
	<b>POIGNMARCH/PM</b> Code : H4650	Metal Marshal handle - 220 x 160 x 60 mm		<b>POIGNMARCH/GM</b> Code : H4652	Marshal handle, large model - 280 x 160 x 60 mm
	<b>ROUE100</b> Code : H0288	Swivel caster diameter 100 mm		<b>ROUE100FREIN</b> Code : H0266	Swivel caster diameter 100 mm - with brake
	<b>GRENOUILLE</b> Code : H0698	Draw bolt		<b>PAPILLONPM</b> Code : H0287	Medium butterfly latch
	<b>PAPILLONGM</b> Code : H0288	Large butterfly latch		<b>CHARNDEG</b> Code : H0289	Detachable metal hinge, large model
	<b>ECROUCAGE</b> Code : H0270	Cage nut for PROFILRACK		<b>VIRACK/12</b> Code : H3085	Rack screw diameter 6 mm length 12 mm
	<b>VIRACK/16</b> Code : H0271	Cage nut screw diameter 6 mm length 16 mm		<b>TAMPON</b> Code : H0273	Rubber foot, large model
	<b>RENFORT</b> Code : H0290	Metal corner reinforcement		<b>VCA412</b> Code : H8881	4x12 fluted rivet (box of 100)
	<b>VCA512</b> Code : H8882	5x12 fluted rivet (box of 100)		<b>VCA516</b> Code : H8883	5x16 fluted rivet (box of 100)
	<b>V561</b> Code : H8880	Black flat plastic washer - 5.5 x 10mm (per 100pcs)		<b>CORN2020</b> Code : H0283	Aluminium angle 20 x 20 mm - 2 m bar
	<b>CORN3020</b> Code : H0827	Aluminium angle 30 x 20 mm - 2 m bar		<b>CORN3030</b> Code : H0282	Aluminium angle 30 x 30 mm - 2 m bar
	<b>HYBRIDE10</b> Code : H0284	Aluminium hybrid profile - 2 m bar		<b>PROFILRACK</b> Code : H0281	Sliding rack profile - 2 m bar
	<b>TOLE1U-NO</b> Code : H0736	19" panel height 1 unit		<b>TOLE2U-NO</b> Code : H0737	19" panel height 2 units
	<b>TOLE3U-NO</b> Code : H0738	19" panel metal height 3 units		<b>TOLE4U-NO</b> Code : H0739	19" panel metal height 4 units

# CONSTRUCTION

	COIN2PGM Code : H0735	2-legged metal corner - large model
	COIN3P Code : H0422	3-legged metal corner - medium model
	TOL12XLR Code : H0423	19" panel 1 unit for 6 XLR male chassis and 6 XLR female chassis
	TOLE2UV-N0 Code : H0367	19" panel, height 2 units, vented - special aeration
	JB1200 Code : B00930	JB SYSTEMS Large recessed handle for speaker
	JB6 Code : B00921	JB SYSTEMS Small recessed handle for speaker
	JB8 Code : B00932	JB SYSTEMS Plastic protection corner for speaker
	SPEAKER GRILL 10inch Code : B00910	Strong black metal grill
	SPEAKER GRILL 15inch Code : B00912	Strong black metal grid
	SPEAKER GRILL 8inch Code : B00909	Strong black metal grid
	TE20 Code : B00918	Connection plate with 2x Speakon compatible connector <sup>®</sup> and 2 screw connectors
	MS-00 Code : B03189	JV CASE 4x M6x16 + 4x plastic washers + 4x cage nut 2.2mm
	MS-02 Code : B03163	JV CASE 4x M6x16 + 4x plastic washers + 4x cage nut 1.5mm
	MS-04 Code : B03165	JV CASE 12x screw rack M6x16 + 12x plastic washers
	RACK DRAWER 2U Code : B03194	JV CASE 19" 2U drawer for rack
	RACK TRAY 1U Code : B03197	JV CASE 19" 1U shelf
	RP 0.5U - 1/2U Rack panel Code : B03142	JV CASE 19" panel.
	RP 1U/V - 1U ventilation rack panel Code : B03147	Vented 19" panel 1U
	RP 2U - 2U Rack panel Code : B03144	19" panel 2U
	RP 2U/V - 2U ventilation rack panel Code : B03148	Ventilated 19" panel 2U
	<b>NEW</b> RP 1U - 4xTRUE1 F - 5xD-size Code : B03293	U Rack panel to hold 4x Neutrik® TRUE1 F and 5x D-size connectors

	COIN3PPM Code : H0274	3-legged metal corner - small model
	COIN3PGM Code : H0734	3-legged metal corner - large model
	TOLE1UV-N0 Code : H0368	19" panel, height 1 unit, vented
	ETAGÈRE2U Code : H1626	Metal shelf height 2 units
	JB14 Code : B00926	JB SYSTEMS bass tube-Recessed bass-reflex tube for speaker
	JB7 Code : B00922	JB SYSTEMS Rubber foot for speaker
	SA65 Code : B00735	JB SYSTEMS 35mm metal adapter for speaker stands
	SPEAKER GRILL 12inch Code : B00911	Strong black metal grid
	SPEAKER GRILL 18inch Code : B00913	Strong black metal grid
	TE10 Code : B00915	Connection plate for loudspeaker with 2 terminal blocks
	A.CONTROLLER/ALU Code : B03187	Adapter for 2U/3U controllers
	MS-01 Code : B03160	JV CASE 4x M6x16 + 4x plastic washers + 4x cage nut 3mm
	MS-03 Code : B03164	JV CASE 20x black PVC washers M6
	MS-06 Code : B03178	JV CASE 12x M6 bolt x20 + 12x M6 nuts.
	MS-08 50x M4x16 bold-Mennekes Code : B03191	Set 50x M4 screws/nuts for mounting AC outlet.
	RACK DRAWER 3U Code : B03196	JV CASE 19" 3U drawer for rack
	RACK TRAY 2U Code : B03198	JV CASE 19" 2U shelf
	RP 1U - 1U Rack panel Code : B03143	19" panel 1U
	RP 1U/XLR - XLR (D-size) Code : B03149	19" panel 1U for 12 x XLR
	RP 2U/PC-8 Code : B03181	19" 2 units rack panel for 8x Blue Power Outlet
	RP 3U - 3U Rack panel Code : B03145	19" panel 3U



# LOUDSPEAKERS AND FILTERS

	<b>SRDR12</b> Code : H10164	1.35 inch 50W 8 Ohm driver for SR12A and SR15A
	<b>SDR-50</b> Code : H9815	Driver for S8 and S10
	<b>MOJOLINE-275</b> Code : H10586	2.75-inch tweeter for MOJ0500LINE
	<b>CDR-20</b> Code : H10315	1-inch 20W 8 Ohm tweeter for CR80A
	<b>JB330</b> Code : B00801	85x85mm piezo tweeter
	<b>JB660</b> Code : B00804	161x94mm dual piezo tweeter
	<b>PTX34</b> Code : B00685	HF Driver: 1.50" - 50W 8 Ohm
	<b>SXDR-50</b> Code : H10853	1.35-inch driver for SX12A and SX15A speakers

	<b>SRDR10</b> Code : H10163	1 inch driver for SR10A speaker
	<b>OCDR-20</b> Code : H9400	COMPACT, SATCOM16, S6, D12 and D15 satellite engine
	<b>HLTR</b> Code : H10590	8 Ohm ribbon tweeter for HL-4
	<b>CODR-20</b> Code : H10309	1-inch 20W 8 Ohm tweeter for COMPACT-500 satellite
	<b>HT30</b> Code : B00806	1" capton 150W 8 Ohm bullet tweeter
	<b>JB550</b> Code : B00803	187x80mm piezo tweeter
	<b>PH2</b> Code : B00823	Horn for PTX34 and PTX44
	<b>PTX44</b> Code : B00686	HF Driver: 1,75" - 50W 8ohm
	<b>HT100</b> Code : B00807	1" capton 300W 8 Ohm bullet tweeter

	<b>AXO-S8</b> Code : H9725	Filter for S8
	<b>AXO-COMPACT</b> Code : H9399	2-way filter for COMPACT satellite
	<b>AXO-SR10P</b> Code : H10320	2-way filter for SR10P speaker
	<b>AXO-SR15P</b> Code : H10322	2-way filter for SR15P speaker
	<b>AXOHL</b> Code : H10591	2-way passive filter for HL-4
	<b>CN-3</b> Code : B00615	High pass filter for 2-way system [X-over freq. : 7kHz, Slope: 12dB/oct RMS power: 100W]
	<b>CN-9</b> Code : B00814	2 way professional filter [X-over freq. : 2kHz, Slope: 12dB/oct, RMS power: 200W]

	<b>AXO-S6</b> Code : H9724	Filter for S6
	<b>AXO-S10</b> Code : H9727	Filter for S10
	<b>AXO-SR12P</b> Code : H10321	2-way filter for SR12P speaker
	<b>AXO-COMPACT500</b> Code : H10310	2-way filter for COMPACT-500 satellite
	<b>CN-12</b> Code : B00815	2-way professional filter [X-over freq. : 1.8kHz, Slope: 12dB/oct, RMS power: 300W]
	<b>CN-6</b> Code : B00813	High pass filter for 2-way system [X-over freq. : 4.5kHz, Slope: 18dB/oct RMS power: 100W].

# LOUDSPEAKERS

	<b>CR25WB-200</b> Code : H10856	12-inch woofer for CR25A-COMBO
	<b>SXWB15-200</b> Code : H10852	15-inch 250W woofer for SX15A
	<b>iLINEw320</b> Code : H10765	HP 3" 20W for iLINE series columns
	<b>SRWB12-350</b> Code : H10161	12" 350W 4 Ohms woofer for SR12A speaker
	<b>SRWB12-350-8</b> Code : H10318	12-inch 350W 8 Ohm woofer for SR12P
	<b>SW8-150</b> Code : H9816	8-inch woofer for S8
	<b>OWB6-100</b> Code : H9401	6.5" 8 Ohms 100 W woofer for COMPACT and S6 satellites
	<b>CRW6-60</b> Code : H10314	6.5-inch 80W 8 Ohm woofer for CR80A
	<b>OWB12-400-8</b> Code : H9402	12-inch 400W 8 Ohm woofer for COMPACT subwoofer
	<b>HLWB10</b> Code : H10589	10-inch 8 Ohm woofer for HL-10ASUB
	<b>HLWB8</b> Code : H10588	8-inch 8 Ohm woofer for HL-08ASUB
	<b>CUBW12-300</b> Code : H10728	12-inch 300W woofer for CUBsub112
	<b>SRWB18-600</b> Code : H10733	18-inch woofer for SRSUB18A
	<b>COW4-60</b> Code : H10308	4.75-inch 80W 8 Ohm woofer for COMPACT-500 satellite
	<b>PWX 18/400</b> Code : B00683	18-inch / 400Wrms woofer
	<b>SP-12/200</b> Code : B00666	12-inch / 200W woofer
	<b>SXWB12-200</b> Code : H10851	12-inch 200W woofer for SX12A
	<b>SRWB10-250</b> Code : H10160	10-inch 250W 4 Ohm woofer for SR10A speaker
	<b>SRWB15-350</b> Code : H10162	15" 350W 4 Ohms woofer for SR15A speaker
	<b>SRWB15-350-8</b> Code : H10319	15-inch 350W 8 Ohm woofer for SR15P
	<b>SRWB10-250-8</b> Code : H10317	10 inch woofer 250W 8 Ohms for SR10P
	<b>SW10-250</b> Code : H9726	10-inch woofer for S10
	<b>OWB15-600</b> Code : H9106	15" woofer used in OCTAVE, SUB115-AMP, EX15S, EX215S subwoofers
	<b>HLWB4</b> Code : H10587	4-inch 8 Ohms woofer for HL-4
	<b>MOJOLINE-08</b> Code : H10585	8-inch woofer for MOJ0500LINE
	<b>CUBW08-150</b> Code : H10729	8-inch 150W woofer for CUBsub208
	<b>COWB10-300</b> Code : H10307	10-inch 300W 4 Ohm woofer for COMPACT-500 subwoofer
	<b>PWX 10/200</b> Code : B00679	10-inch / 200Wrms woofer
	<b>SRWB15-500</b> Code : H10352	15-inch woofer for SRSUB15A
	<b>PWX 15/300</b> Code : B00681	15-inch / 300Wrms woofer
	<b>SP-10/150</b> Code : B00665	10-inch / 150W woofer
	<b>SP-15/250</b> Code : B00667	15-inch / 250W woofer



# LAMPS

	LPAR36/4515 Code : H0132	GE lamp PAR36 6V 30W 4515
	LPA56/WFL Code : H8662	GE lamp PAR56 240V 300W 37° x 20°
	MASTER LEDspot PAR20 DIM Code : B06501	PHILIPS LED LAMP 6W--2700K- E27-25°-DIM
	MASTER LEDspot PAR38 DIM Code : B06503	PHILIPS LED LAMP 13W-2700K- E27-25°-DIM
	GY9.5500 Code : H0296	Philips lamp CP82 240V 500W
	GX9.51000 Code : H0295	Lamp CP70 240V 1000W
	LR75/118-500 Code : H9011	Lamp R7S 240V 500W 2900°K 2000H
	<b>NEW</b> SIRIUS HRI 100W Code : B02180	Metahalogen Lamp, 100 Watt, 6000h, 9000K
	LMSD-250/2 Code : H8994	Lamp type MSD-250-2 94V 250W 8000°K 2000H
	LBVM1 Code : H9006	Lamp type BVM 120V 300W 3200°K 150H
	LBVM3 Code : H9007	Lamp type BVM 240V 300W 3200°K 75H
	G6.3540036 Code : H0626	Osram lamp EVD 36V 400W
	LEFR Code : H9009	Lamp type EFR 15V 150W 3400°K 50H
	ELC25024 Code : H3119	Philips lamp ELC 24V 250W
	ENH250120 Code : H0177	Osram lamp ENH 120V 250W

	LPA56/MFL Code : H0131	GE lamp PAR56 240V 300W
	MASTER LEDspot PAR16 DIM Code : B06500	PHILIPS LED LAMP 3.7W-2700K-GU10-25°-DIM
	MASTER LEDspot PAR30 DIM Code : B06502	PHILIPS LED LAMP 9.5W-2700K-E27-25°-DIM
	GY9.5650 Code : H0297	GE lamp T26 240V 650W
	GX9.51000/T19 Code : H2590	Lamp T19 240V 1000W
	HPL 575-X LL 230v Code : B02171	GE Lighting Halogen lamp, no reflector, 575W/230V, sp. socket
	L2R Code : H10165	Philips® MSD Platinum 2R lamp
	L15R Code : H10358	Philips MSD Platinum 15R lamp
	MSD250/2-0S Code : H3425	Osram lamp MSD 250W
	G6.35300110 Code : H1247	Osram lamp 64514 120V 300W
	G6.35300220 Code : H0628	Osram lamp 64516 240V 300W
	EFP10012 Code : H0624	Philips or Osram lamp EFP 12V 100W
	LELC Code : H9008	Lamp type ELC 24V 250W 3200°K 50H
	LELC/LD Code : H8986	lamp type ELC 24V 250W 3200 °K 300H
	LST/1500 Code : H9021	Lamp strobe type-3 1500W 5600°K 500H 120Hz max





[WWW.SYNQ-AUDIO.COM](http://WWW.SYNQ-AUDIO.COM)



[WWW.AUDIOPHONY.COM](http://WWW.AUDIOPHONY.COM)



[WWW.AUDIOPHONY-PA.COM](http://WWW.AUDIOPHONY-PA.COM)



[WWW.BRITEQ-LIGHTING.COM](http://WWW.BRITEQ-LIGHTING.COM)



[WWW.CONTEST-LIGHTING.COM](http://WWW.CONTEST-LIGHTING.COM)



[WWW.CONTEST-LIGHTING.COM](http://WWW.CONTEST-LIGHTING.COM)



[WWW.JB-SYSTEMS.EU](http://WWW.JB-SYSTEMS.EU)



[WWW.HILEC.EU](http://WWW.HILEC.EU)



See conditions at your retailer. Within the limits of available stocks. Information is subject to typographical errors. The technical specifications, photos, illustrations and prices in this catalogue are not binding. In order to improve our products, modifications can be made. In accordance with the legislation in force, it is up to each retailer to freely set its selling prices.

AUDIOPHONY®, AUDIOPHONY-PA®, CONTEST®, CONTESTAGE®, JB SYSTEMS®, BRITEQ®, SYNQ®, HILEC® & JVCASE® are registered trademarks of HITMUSIC SAS and BEGLEC NV.

Any reproduction of the catalogue, even partial, or use of the logos or design of the intellectual property is prohibited, without prior written permission from HIT MUSIC SAS and/or BEGLEC NV.

Catalogue published by HIT MUSIC SAS - Parc d'Activités CAHORS SUD - EN TESTE  
46230 FONTANES - France.

Product photo credits : Studio ZE and BEGLEC NV. - Ambience photo credits : © Shutterstock -  
Creation: Agence NOVO & HITMUSIC SAS