


MA-708 Portable Wireless PA System

Features

- One-piece molded cabinet with high efficiency amplifier system that drives the dual speaker system for powerful and clear sound.
- Retractable handle and rugged wheels make it amazingly easy to transport. It can be hand-carried or installed on a tripod stand.
- Built-in transmitters' storage.
- Modularized optional accessories for fast and easy installation and replacement.
- TONE, VOP (voice-over-priority) and ECHO control on mics.
- Mixed input amplification of wired mic, wireless mic, and audio players.
- Extension speaker socket can be used with MA-708EXP passive speaker.
- Industry's only wireless interlinking transmitter option to interlink multiple MA-708 portables wirelessly to extend transmission range and expand coverage.
- Industry's first built-in active dual antennas for long distance and stable receiving.
- Built-in AC switching power supply and rechargeable batteries.

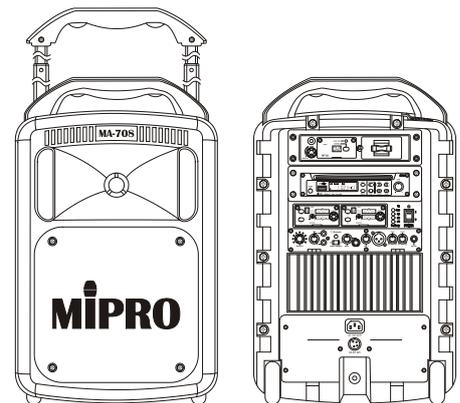

Specifications

Max. SPL	108 dB
Drivers	1.5" Tweeter & 8" Woofer
Frequency Range	50 Hz – 18 kHz
Audio Inputs	MIC IN: 1 × XLR, 1 × 1/4" (6.3 mm) LINE IN: 1 × RCA
Audio Output	LINE OUT: 1 × RCA
Amplifier	Class D
Output Power	190 W RMS, 325 W peak
Receiver Modules	Up to 4
Audio Players	Bluetooth, CD/USB/SD player & recorder (optional)
Transmitter Modules	MTM-92 (optional)
Extension Speaker	1 × 1/4" (6.3 mm)
Other Functions	TONE, VOP and ECHO control on mics
Power Supply	AC 100 – 240 V or DC 24 – 32 V
Battery	Built-in Lead-acid battery
Battery Indicator	4-segment indicators (25/50/75/100%)
Standby Time	Up to 7 hours
Color	Black
Dimensions	336 × 545 × 336 mm (W × H × D)
Weight	Approx. 15.3 kg
Optional Accessories	SC-708 carry bag, MS-70 tripod stand, MM-Series microphones, MB-80 Li-ion battery
Patents and Approvals	Patented. Telecom and safety regulations approved
Note	Refer to the actual product in the event of product description discrepancy



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. MI023/01