



Visit product page



IP65

FOS TOURING PAR IP HEX

L005497

Weatherproof aluminium led par with IP True powercon connectors , Beam aperture: 25° , 18 RGBW+Amber+UV 15w LEDs (6 in1)Dimmer: 0-100% stop/strobe effect, aluminium 4kg, noiseless cooling system.

TECHNICAL DETAILS

Light Source - Optics

Light Source: 18x 15 Watt RGBWA + UV LEDs.

Beam angle: 25°.

Lifespan: approximately 50,000 hours.

Effects

Linear Dimming and strobe effects.

Red, Green, Blue, White, Amber & Ultra Violet color mixing.

Control

Auto, Static Color & Sound modes.

DMX control with 6 or 9 channels.

Installation / Dimension details

Power Supply: 100/240 Volt AC, 50/60 Hz.

Power Consumption: 280 Watt maximum.

4 digit LED display for accessing the options menu.


Waterproof Rate: IP65.

Chassis made from aluminium.

Weight: 4,6 Kg.

Carton box for 4 pcs: 53 x 53 x 24 - 21 kg

PHOTOS

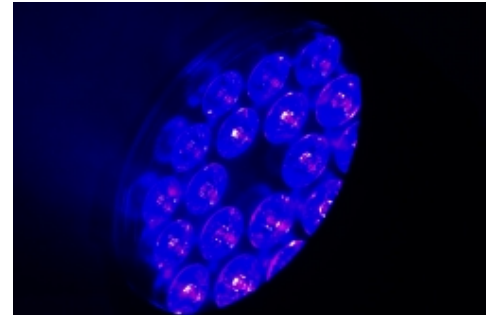

PRODUCT VIDEO



ACCESSORIES



FC-TP-PDC-1.5

Professional

TruePowercon/ DMX cable 1.5 meter.



FC-TP-PDC-3

Professional

3 meter.



FC-TP-PDC-5

Professional

5 meter.



FOS Case 8in1 PAR PRO

Flight case with wheels for

8pcs Pro series and T



www.fos-lighting.eu

