

pure LIGHTING
EXCITEMENT



NEW PRODUCTS 2015

DJ & Mobile | Club Install | Production Events | Band & Stage | Party



www.adj.eu

VOLUME 15.1

INNO SPOT ELITE™

- High output Intelligent Moving Head with a bright white LED source
- 8 Colors + Spot | 7 rotating, replaceable gobos + spot
- 6 Glass and 1 Metal Gobo | Separate color & gobo wheels | 19-degree beam angle
- 3 Operational modes: DMX-512, Sound Active or Show Mode | 15 DMX channels
- Gobo scroll mode | Motorized focus & Iris
- 4-button DMX LCD display | 4 Built-In show modes
- Gobo Shake effect | 6-facet rotating prism effect
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power link (Up to 4 Inno Spot Elite's @ 120V, 8 Inno Spot Elite's @ 220V fixtures)
- LED Source: 180W White LED source, 8000K (Rated at approximately 50,000 hrs)
- Lux @ 3M: 4840 Lux
- Dimensions LxWxH : 333 x 328 x 526mm
- Weight: 13 kg




Product Video



Code: 1222400083



Photometric



Code: 1237000089




Product Video

INNO BEAM LED™

- Light Source: 80W High Output White LED, 50,000 Lamp life
- LUX: 75300 @ 2M at 6° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 13 ; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 4 Fixed Gobos, 4 Beam Reducers + spot
- Features: 8 Facet Rotating Prism, Frost Filter
- Pan: 540 degree, Tilt: 270 degree
- Power Draw: 130W Max; 1.08 Amps @120V, .59 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions LxWxH : 289 x 188 x 461mm
- Weight: 18 lbs. / 8.2 kg.


Photometric



3 SIXTY 2R™

- Light Source: 2x Philips® Platinum 2R discharge, 8,000:K – 6,000 hr. lamp life
- LUX: 50460 @10M
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 21, 24 or 32; 3 Pin with Remote DMX addressing
- Colors: 13 Colors + White (Each Head) & Gobos: 14 rotating fixed gobos + spot (Each Head)
- Features: 4° Beam angle adjustable via reducing beam gobos, 8 Facet Prisms, Frost Filters, Infinite Pan and Tilt
- Pan: Standard 360/540 degree, Tilt: 270 degree; or optional Infinite Pan and Tilt
- Power Draw: 400W Max; 3.3 Amps @120V, 1.81 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing), Powercon In
- Dimensions LxWxH 428x326x473mm
- Weight: 45 lbs. / 20.3 kg.

Photometric



Product Video



Code: 1237000086





ILLUSION DOTZ 3.3™

- Light Source: 9 X 30W RGB COB LEDs, 100,000 Lamp life
- Operational modes: DMX, Master/Slave Mode, Auto Mode & Sound Active
- DMX channels: 12, 14, or 38; 3 & 5 Pin In/Out
- Electronic Dimming: 0 - 100%; LED pulse and strobe effect
- Moving Head with 3X3 Matrix of Pixel controllable Tri color LEDs
- RJ45 Input/Output for Artnet/KlingNet Control
- Beam Angle: 15 degrees
- Powercon AC IN/OUT; Daisy Chain up to 3 units @120V, 5 units @ 220V
- Power Draw: 285W Max; 3.9 Amps @120V, 2.13 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions LxWxH: 380 x 264x 512mm
- Weight: 29 lbs. / 13kg.

NEW



Code: 122320034

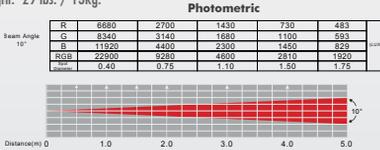


ILLUSION DOTZ 4.4™

- Light Source: 16 X 30W RGB COB LEDs, 100,000 Lamp life - Beam Angle: 15 degrees
- Operational modes: DMX, Master/Slave Mode, Auto Mode & Sound Active
- DMX channels: 12, 14, or 59; 3 & 5 Pin In/Out
- Moving Head with 4X4 Matrix of Pixel controllable Tri color LEDs
- RJ45 Input/Output for Artnet/KlingNet Control
- Powercon AC IN/OUT; Daisy Chain up to 3 units @120V, 5 units @ 220V
- Power Draw: 468W Max; 3.9 Amps @120V, 2.13 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions LxWxH: 414 x 153 x 376mm
- Weight: 18 lbs. / 7.8 kg.



Code: 122320033

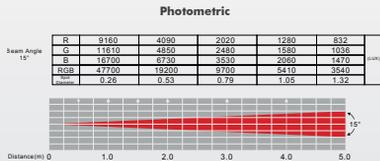


CRAZY 8™

- Light Source: 8 X 8W High Powered White LEDs, 50,000 Lamp life
- Operational modes: DMX, Master/Slave Mode & Sound Active
- DMX channels: 1,9,12,15 or 21; 3 Pin In/Out
- Moving Head with dual tilting bars, create 8 sharp 4.5 degree beams
- Base Pans 540 degree, each bar Tilts 150 degrees
- Electronic Strobe/Random effect; Individual Pixel Control
- Powercon AC IN/OUT; Daisy Chain up to 4 units @120V, 8 units @ 220V
- Power Draw: 90W Max; .75 Amps @120V, .41 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions LxWxH: 414 x 153 x 376mm
- Weight: 18 lbs. / 7.8 kg.



Code: 123700087

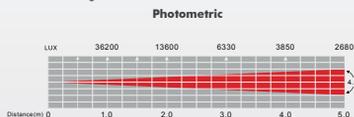

INNO POCKET SPOT & PEARL™

- Light Source: 12W CREE High Output White LED, 50,000 Lamp life
- LUX: 4823 @ 2M at 13° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 9 or 11; 3 Pin In/Out
- Colors: 7 Colors + Open
- Gobos: 7 Fixed Gobos + spot
- Features: Built in Shows, include IR remote control (UC-IR)
- Pan: 540 degree, Tilt: 230 degree
- Power Draw: 53W Max; 44 Amps @120V, 21 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions LxWxH : 159 x 147 x 265mm
- Weight: 6 lbs. / 2.7 kg.



INNO POCKET SPOT Code: 123700088
INNO POCKET SPOT PEARL Code: 123700098



UC-IR Remote included

Photometric



INNO POCKET SPOT TWINS™


- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- 7 Colors + white / 7 fixed gobos + spot - Separate color & gobo wheels
- 3 Operational modes: DMX Control, Sound Active Mode & Show Mode
- 2 DMX channel modes: 19 & 23 Channel modes
- 540° pan / 230° tilt (16-bit) - Pan /Tilt Inversion mode
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Optional IR wireless remote control: Full On, Stand by, Strobe, Color Change, Dimming, Sound Active On/Off (UC-IR Not Included)
- Integrated Speaker Flange for standard Speaker Stands (Ø 36mm)
- Power consumption: 66W
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions LxWxH : 487 x 153 x 327mm
- Weight: 17 lbs. / 7.6 kgs.

NEW



Code: 1237000104

Photometric



UC-IR (Not Included)

Colors / Gobos



INNO POCKET BEAM Q4™

- LED Source: 15w QuadLED source (Rated at approximately 50,000 hrs)
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 3 DMX channel modes: 10, 11, 13; / 4 Built-in shows
- Beam Angle: 6-degree
- 540° pan / 230° tilt (16-bit); Pan /Tilt Inversion mode
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Linkable: DMX via 3-pin XLR cable
- Optional IR wireless remote control: Full On, Stand by, Strobe, Color Change, Dimming, Sound Active On/Off UC IR Not Included)
- Power consumption: 22W @120V, 27W @ 230V
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions LxWxH : 159 x 147 x 265mm
- Weight: 7 lbs. / 3 kgs.


NEW



Code: 1237000106

Photometric

	R	G	B	W	RGBW
6747	5080	2848	1716	1094	
8939	4764	2866	1613		
4261	2238	1617	89.6		
12710	6973	4030	237.6		
20000	12910	6857	4071	2558	




Colors



INNO POCKET WASH™

- Light Source: 4x 10W 4-in-1 RGBW LED source (Rated at approximately 50,000 hrs)
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 2 DMX Channel Modes: 14/21
- 12 Built-in shows
- Beam Angle: 28-degrees / 540° pan / 180° tilt (8-bit & 16-bit)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Optional IR wireless remote control (UC-IR Not Included)
- Power consumption: 64.5W (Full-On)
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions LxWxH : 171 x 149 x 214mm
- Weight: 16 lbs. / 7.2 kgs.


NEW

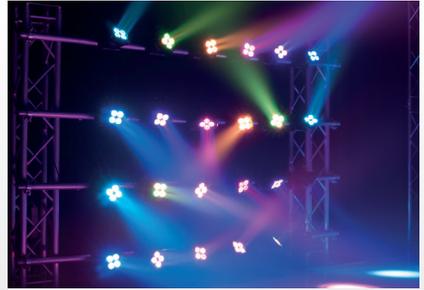

Code: 1237000105

Photometric

	R	G	B	W	RGBW
Beam Angle 28°	12800	2800	775	572	343
	9885	2612	1376	712	407
	3327	686	270	230	124
	14000	3500	1330	850	452
	33850	6778	2600	1785	1290



RGB Colors Mixing



Code: 1237000102




INNO POCKET SCAN™

- 12-Watt LED DMX Barrel Mirrored Scanner
- Single Gobo/Color wheel: 8 fixed Gobo/Colors + spot/white
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 6 DMX channels
- 12 Built-in shows | Gobo Shake effect | Gobo scroll mode
- Beam Angle: 14-degrees
- X/Y mirror movement | Stepper motors with micro stepping
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast Inno Pocket Roll
- Dimming: 0% - 100%
- Display Inversion Mode
- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- Dimensions LxWxH : 329 x 132 x 165mm
- Weight: 2.6 kgs.

Colors / Gobos:



Photometric



UC-IR
(Not Included)

INNO POCKET ROLL™

- 12-Watt LED DMX Barrel Mirrored Scanner
- Single Gobo/Color wheel: 8 fixed Gobo/Colors + spot/white
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 6 DMX channels
- 12 Built-in shows
- Gobo Shake effect | Gobo scroll mode
- Beam Angle: 14-degrees | X/Y mirror movement | Stepper motors with micro stepping
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Shutter: Pulse effect; random strobe slow to fast Inno Pocket Roll
- Dimming: 0% - 100% | Hanging Yoke + safety hook included
- Optional IR wireless remote control: Full On, Stand by, Strobe, Color Change, Dimming, Sound
- LED Source: 12W White LED source (Rated at approximately 50,000 hrs)
- Dimensions LxWxH : 329 x 132 x 165mm
- Weight: 2.6 kgs.



Code: 1237000103

Colors / Gobos:



Photometric



UC-IR
(Not Included)

INNO SPOT PRO & PEARL™

- Light Source: 80W High Output White LED (8000K Color temperature)
- LUX: 4840 @3M
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 14; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal/glass)
- Features: 12-17° Beam angle (manual zoom), Motorized Focus, 3 Facet Prism, Glass Gobos
- Pan: 540 degree, Tilt: 270 degree
- Power Draw: 140W Max; 1.16 Amps @120V, .64 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Dimensions LxWxH : 288 x 167 x 425mm
- Weight: 19.8 lbs. / 9 kg.



INNO SPOT PRO Code: 1222400082
INNO SPOT PRO PEARL Code: 1222400086



Photometric




Code: 1237000090



INNO SCAN HP™

- Light Source: 80W High Output White LED Engine, 50,000 Lamp life
- LUX: 5461 @ 2M at 16° beam angle
- Operational modes: DMX, Auto Run, Master/Slave & Sound Active
- DMX channels: 8, or 11; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions LxWxH : 578 x 278 x 209mm
- Weight: 16 lbs. / 7.3 kg.

Photometric



INNO ROLL HP™


- Light Source: 80W High Output White LED Engine, 50,000 Lamp life
- LUX: 2000 @ 2M at 10° beam angle
- Operational modes: DMX, Master/Slave & Sound Active
- DMX channels: 8 Channels; 3 Pin In/Out
- Colors: 8 Colors + Open
- Gobos: 6 Rotating, Interchangeable Gobos + spot, 24mm (20mm viewable; metal)
- Power Draw: 103W Max; .86 Amps @120V, .47 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions LxWxH : 578 x 278 x 209mm
- Weight: 16 lbs. / 7.3 kg.



Code: 1237000091



Photometric





Code: 1237000097




Product Video

VORTEX 1200™

- Light Source: 12 X10W RGBW Quad Color (4-IN-1) LEDs, 50,000 Lamp life
- DMX channels: 14, 15, 17 or 29; 3 Pin In/Out
- 23 Built-In Color Macros; Electronic Dimming: 0% - 100%
- 16-piece lens kit rotates continuous 360 degrees clockwise or counter-clockwise
- Electronic Strobe/Random effect; 23 Built-In Color Macros
- Powercon AC IN/OUT; Daisy Chain up to 4 units @ 120V, 8 units @ 220V
- Power Draw: 174W Max; 1.45 Amps @120V, .79 Amps@220V
- Multi-voltage Operation: 100-240V, 50Hz/60Hz (auto sensing)
- Compatible with ADJ UC3 series remotes
- Dimensions LxWxH: 263 x 170 x 327mm
- Weight: 16 lbs. / 7.3 kg.

Photometric

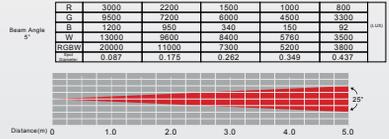

ZIPPER™

NEW




Product Video

- LED Source: 4 x 8W LED source Barrel Mirrored Scanner(Rated at approx. 50,000 hrs)
- 1 x Red, 1x Green, 1 x Blue, & 1 x White
- 3 Operational modes: DMX, Sound Active & Internal Show control modes
- 3 DMX Modes: 1/3/11 Channels / 16 Built-in shows
- Beam Angle: 2-degrees
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- IEC AC IN/OUT on rear to daisy chain power (up to 10 @ 120V and 18 @ 230V)
- Hanging Yoke + safety hook included
- Power consumption: 66W (Full-On)
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions LxWxH : 479 x 247 x 132mm
- Weight: 13 lbs. / 6 kgs.

Photometric

R	3200	2850	1200	895	441
G	31000	8400	4100	2050	1350
B	680	200	98	81	41
W	63000	16000	7500	4400	2900



Code: 1237000107

Colors




ROTOBEAM 4™



Product Video

- Specifications:
- 4-head LED Helicopter effect with 360-degree continuous rotation
- Beams rotate and strobe to the sound of music
- 4x 3-watt LEDs (1x Red, 1x Green, 1x Blue & 1x White)
- Run all night – no duty cycle
- UC-IR Remote compatible (Sold Separately): Control Stand By (Blackout), Full On, Color Selection, Strobe, Sound, & Dimming
- Auto Program with various color patterns (non user selectable)
- Rotation: Variable
- Includes single yoke to mount on wall or from trussing bracket
- Multi Voltage: AC 100V-240V 50/60Hz (Auto Sensing)
- Power Consumption: 19W
- Dimensions LxWxH : 223 x 223 x 230mm
- Weight: 3 kg.

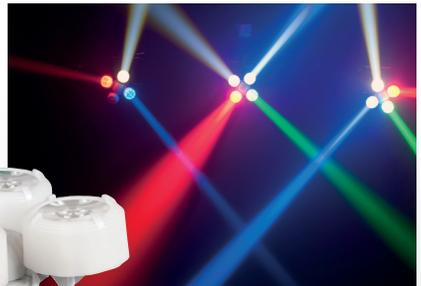

Code: 1223200020

MONSTER DUO™

- Light Source: 18 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Dual lens Moonflower effect with 45° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 127 units @110V, 20 units @220V)
- Power Consumption: 35W
- Dimensions LxWXH : 271 x 251 x 176mm
- Weight: 5 lbs/ 2.2 kg



UC-IR Remote compatible
(Sold Separately):



Product Video



Code: 1222300018



Code: 1222300017



Product Video

MONSTER QUAD™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Quad lens Moonflower effect with 93° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 6 units @110V, 10 units @220V)
- Power Consumption: 35W
- Dimensions LxWXH : 460 x 285 x 167mm
- Weight: 8 lbs/ 3.4 kg



UC-IR Remote compatible
(Sold Separately):



MONSTER BEAM™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs
- High output, Wide Beam Moonflower effect with 29° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 7 units @110V, 12 units @220V)
- Power Consumption: .36 Amps @ 110V; .18 Amps @ 220V
- Dimensions LxWXH : 213 x 254 x 207mm
- Weight: 8 lbs/ 3.3 kg

Compatible with UC3 Series

UC3 RC Receive



UC3 RC System



UC3 Footcontroller



Product Video



Code: 1226200043



MONSTER FUN™

- Light Source: 25 x 1W RGBAW (Red, Green, Blue, Amber, White) LEDs + white LED strobe strips
- 2-FX-IN-1: high output, Moonflower effect with five lenses + four strobe strips
- Large 60° Beam Angle
- Exciting multi color built-in programs; Sound Active, Auto Program or DMX
- DMX Modes: 1; 3-Pin DMX In/Out
- IEC AC In/Out (Power daisy chain 14 units @110V, 24 units @220V)
- Power Consumption: 50W
- Dimensions LxWxH : 13.5" x 9.5" x 13.5" / 338 x 241 x 338mm
- Weight: 10 lbs/ 4.7 kg



UC-IR Remote compatible
(Sold Separately):



Product Video



Code: 1222300019



Code: 1222400085



Product Video

JELLY GLOBE™

- Slow rotating ball that produces 2-FX-IN-1: glowing transparent case + sharp RGB beams of light
- Built-In light shows
- Wide beam spread covers a large area
- Beam angle: 330 degrees
- Rotation: Variable up to 5 RPM
- Light Source: 2 x 3W TRI RGB's LEDs
- Power Draw: 11.1W total (All LED's @ Full On)
- Power Voltage: AC 120V/60Hz or 230V/50Hz
- Dimensions LxWxH : 40 x 130 x 723mm; Ball: 30mm; Cable Length: 500mm
- Weight: 3 lbs. / 1.1 kg.



LED COLOR TUBE II™

- 40-inch/ 1000mm LED Color Tube with UV-resistant polycarbonate tubing
- 32 Bright RGB TRI LEDs (3-in-1)
- 15 Exciting LED Colors plus White
- Rainbow color effect
- Each unit includes one easy-to-use wireless remote to control: Manual Color Change; Auto Color Change; Flash; Rainbow Effect; Slow to Fast Color Strobing; On/Off
- Includes AC power supply, two wall mounting brackets and base to stand LED Color Tube up vertically
- Long life LEDs (Rated at approximately 30,000 hrs.)
- Light Source: 32 x 0.2W TRI RGB's LEDs
- Power Draw: 6W total (All LED's @ Full On)
- Auto sensing power supply: DC 100V/60Hz - 240V/50Hz
- Dimensions LxWxH : 1016 x 50 x 50mm
- Weight: 2 lbs. / 1 kgs.



Product Video




Code: 1211500011



INNO COLOR BEAM Z7™

- 70W LED Moving Head Wash with motorized zoom
- 7x 10W RGBW Quad Color (4-IN-1) Osram LEDs
- Motorized Zoom: 10 ~ 60-degree beam angle
- 64 Built-In Color Macros
- 14 DMX channels | 4 Built-In light shows
- Electronic Dimming: 0% - 100% | Five Dimmer Curve Modes
- Pan/Tilt Inverse Mode for contrasting movement when fixtures are linked together
- Fast Pan Tilt Movement | Pan: 540-degree; Tilt: 200-degree
- 16-Bit Fine Pan/Tilt control
- Electronic Strobe/Pulse effect; random strobe slow to fast
- Dimensions LxWxH : 262 x 167 x 340mm
- Weight: 7.5 kg

Photometric



Product Video



Code: 1237000084



Code: 1237000083




Product Video

INNO COLOR BEAM Z19™

- 190W LED Moving Head Wash with motorized zoom
- 19x 10W RGBW Quad Color (4-IN-1) Osram LEDs
- Motorized Zoom: 10 ~ 60-degree beam angle
- 14 DMX channels | 64 Built-In Color Macros
- Electronic Dimming: 0% - 100% | Five Dimmer Curve Modes
- Pan/Tilt Inverse Mode for contrasting movement when fixtures are linked together
- Fast Pan Tilt Movement | Pan: 540-degree; Tilt: 200-degree | 16-Bit Fine Pan/Tilt control
- 4-Button DMX LCD menu with 180° Inverse View mode
- Electronic Strobe/Pulse effect; random strobe slow to fast
- Long Life LED (Rated at approximately 50,000 hrs)
- Dimensions LxWxH : 329 x 188 x 395mm
- Weight: 9.2 kg.

Photometric



UV LED BAR 20™

- Light Source: 20x 1-Watt UV LEDs
- 4 Operational Modes: DMX Controlled / Sound Active / Dimmer / Auto Run
- UV strobe effect
- 3 DMX Channels
- Electronic Dimming: 0 - 100%
- Beam angle: 10 degrees vertical x 40 degrees horizontal linear beam angle
- Power Draw: 30W
- Includes wireless remote: Control On/Off and strobing speed
- Wavelength: 390-410 nanometers
- Multi-voltage Operation: AC 100-240V, 47/63Hz
- Dimensions LxWxH : 334x61x175mm
- Weight: 6 lbs. /2.5 kgs.



UV IR Remote Control
(Included)



Product Video



Code: 1224100007





Product Video

DOTZ TPAR SYSTEM™

Code: 1223200031

- Light Source: 4 X 30W COB Tri RGB LEDs | In separate adjustable fixtures
- Portable Wash/Blinder stage lighting system with stand, travel bag, and foot controller
- Standard 90° or 25° kit included to adjust beam angle; 15 exciting built in programs
- DMX Modes : 3,6,7,12, or 18 channels: 3 PIN DMX In/Out
- 2x power plugs on rear to switch other Effects On/Off by Footcontroller or DMX
- Includes hardware to mount lighting fixtures on top of bar
- IEC AC IN/OUT to daisy chain power
- Multi Voltage operation: AC 100-240V 50/60 Hz (IEC Input)
- Power Consumption: 1.31 Amps @ 110V; .65 Amps @ 220V
- System Dimensions LxWxH : 1000 x 320 x 82mm
- Weight: 35 lbs / 16kg


SYSTEM INCLUDES:

- 4x COB LED Par Wash Fixtures
- 1x Foot Controller
- 1x Lighting Stand
- 1x RFC Remote Control
- 1x Stand Bag
- 1x Soft case for lighting system

(Items Included)



Photometric



DOTZ PAR™

- Light Source: 1x 30-Watt COB TRI LED (RGB: 3-IN-1, rated at approximately 50,000 hrs)
- 5x Operational modes: Auto, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- Standard 90° or 25° kit included to adjust beam angle
- IEC AC IN/OUT to daisy chain power (up to 13 Dotz Par's @ 110V and 28 Dotz Par's @ 230V)
- Power Draw: 36W total (All LEDs @ Full On)
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz
- Dimensions LxWxH : 340 x 140 x 140mm
- Weight: 5 lbs. / 2 kgs.



Product Video





Photometric: Lens Off

Photometric: Lens On

Light Angle	D	R	G	B	W
0°	165	44	21	13	0
15°	158	35	15	12	0
30°	123	25	12	11	11
45°	90	15	9	10	24
60°	65	10	6	8	35
75°	48	7	4	6	46
90°	35	5	3	4	57

Light Angle	D	R	G	B	W
0°	1074	280	140	83	0
15°	935	229	127	71	0
30°	690	166	93	55	54
45°	510	107	68	46	119
60°	385	78	49	36	174
75°	285	58	36	27	231
90°	210	43	27	20	300



Compatible with:
Dotz Par RF remote
(Sold Separately)




Code: 1223200032

DOTZ PAR 100™

NEW

- High output slim low profile Par fixture with one TRI (3-IN-1) RGB COB LED
- COB Technology (Chip On Board) produces powerful, smooth RGB color mixing with rich palettes of color
- Use as Wash/par or Pixel Mapped for a stunning visual effect
- 5x Operational modes: Auto Run, Sound Active, Color Macro, Dimmer, and DMX Controlled Mode
- 4 DMX channel modes: 3, 4, 5 or 9 channel | 4-button LCD DMX display on rear panel
- Intelligently designed, patent pending power & DMX Ins/Outs sit sideways so the unit can be set flat on the ground or set inside truss
- Built-in preset colors and programs | Flicker Free operation (No flickering on camera)
- 32 built-in Color Macros | LED pulse and strobe effect | Electronic Dimming: 0 - 100%
- Beam angle: 80-degrees (25-degrees with supplied lens kit)
- 3-pin XLR chassis mount connectors for DMX linking
- IEC AC IN/OUT to daisy chain power (up to 9 Dotz Par 100's @ 110V and 19 Dotz Par 100's @ 230V)
- Power Draw: 115W total (All LEDs @ Full On)
- Single yoke allows fixture to be mounted
- Light Source: 1x 100-Watt COB TRI LED (RGB: 3-IN-1, rated at approximately 50,000 hrs)
- Dimensions (LxWxH): 165 x 114 x 165mm (Without Bracket)
209 x 114 x 222mm (With Bracket)
- Weight: 3.1 kg

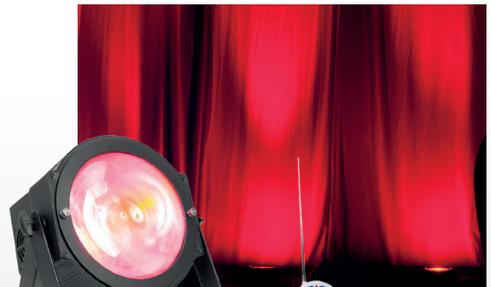

Code:1223200038

Compatible with:
Dotz Par RF remote
(Sold Separately)



RGB Color Mixing:





Code: 1226100281



Product Video

VBAR PAK™

- Ultra bright, compact black Linear fixture with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA) – casts no RGBA shadows
- Smooth RGBA Color Mixing (fast or slow color change operation) | Flicker Free
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 Channels
- 5 Operational modes: RGBA Dimmer mode, sound active mode, static color mode, auto run mode (3 auto run modes), and DMX Control
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- -15 built-in Color Macros
- Electronic Dimming: 0-100%
- VBAR Gig Bag inner dimensions LxWxH : 560 x 165 x 90mm
- System Weight: 4 kg.
- Dimensions LxWxH : 560 x 63 x 90mm
- Weight: 1.7 kg.

SYSTEM INCLUDES:

- 2x VBAR LED Linear Fixtures
- 1x LED RC2 IR
- 1x Soft Case Gig Bag
- Wireless Remote (LED RC2)

VPAR PAK™

- Ultra bright slim flat black Par with 5x 4-Watt, 4-IN-1 QUAD LEDs (RGBA)
- Smooth RGBA Color Mixing (fast or slow color change operation)
- Unique "sit-flat" design: Power & DMX Ins/Outs intelligently designed so the unit can be set flat on the ground or set inside truss
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 8 DMX Channel modes: 1, 2, 3, 4, 5, 6, 7 or 8 Channels
- 5 Operational modes: RGBA Dimmer mode, sound active mode, static color mode, auto run mode (3 auto run modes), and DMX Control
- Digital DMX Display with 4-button menu for easy navigation
- Stand Alone or Master/Slave Configuration
- Beam Angle: 40 degrees
- 15 built-in Color Macros
- Dimensions LxWxH : 225 x 220 x 85mm
- Weight: 1.2 kg.
- VPAR Gig Bag inner dimensions LxWxH : 225 x 200 x 240mm
- System Weight: 3 kg.

SYSTEM INCLUDES:

- 2x VPAR LED Pars
- 1x LED RC2 IR
- 1x Soft Case Gig Bag
- Wireless Remote (LED RC2)



Product Video



Code: 1226100280



FLASHBACK 4™

- Light Source: 288 x 10mm RGBA LED (rated at approximately 20,000 hrs)
- Set of two 4-bank lighting fixtures that fold up into a transportable hard case
- 2 Operational modes: Auto Run or Sound Active
- Sound Active Knob adjustment on rear
- 11 Built-In preset programs
- LED pulse/strobe effect and program control on rear
- Beam Angle: 45-degrees
- Power Draw: 23W total (All LEDs @ Full On)
- Horizontal or vertical stand mountable (tripod stands not included)
- Auto sensing power supply: AC 100V/60Hz - 240V/50Hz
- Dimensions LxWxH : 568 x 192 x 280mm
- Weight: 16 lbs. / 6.9 kgs.



Product Video



Code: 1226100275

FLAT PAR TW5™

- 25W Dynamic White LED Flat Par
- 5x 5-Watt TRI LED 3-IN-1 CW/WW/A (Cool White/Warm White/Amber - 50,000 hrs.)
- 7 DMX Modes: 1, 2, 3, 4, 5, 6 & 7 channels
- TRI LEDs Eliminate color shadows when mixing Dynamic White LEDs
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 40-degree
- 4-button, DMX digital display on rear panel
- Optional RF wireless remote control (sold separately)
- Dual yoke allows fixture to be hung or set on the ground
- Data linkable via 3-pin XLR cables
- Power Draw: 26W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions LxWxH : 272 x 223 x 105mm
- Weight: 6 lbs. / 2.4 kg.




Compatible with:
LED RC2
(Sold Separately)

Code: 1226100276

Photometric

WW	D40	1038	288	111	62	41
CW	D40	1470	350	131	83	54
Amber	D40	923	215	68.3	48.4	32
min/cor	D40	2810	700	298	166	107



Cool, Warm White & Amber Color Mixing:



FLAT PAR TW12™

- 60W Dynamic White LED Flat Par
- 12x 5-Watt TRI LED 3-IN-1 CW/WW/A (Cool White/Warm White/Amber - 50,000 hrs.)
- 7 DMX Modes: 1, 2, 3, 4, 5, 6 & 7 channels
- TRI LEDs Eliminate color shadows when mixing Dynamic White LEDs
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 40-degree
- 4-button, DMX digital display on rear panel
- Optional RF wireless remote control (sold separately)
- Dual yoke allows fixture to be hung or set on the ground
- Data linkable via 3-pin XLR cables
- Power Draw: 61W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions LxWxH : 328 x 280 x 105mm
- Weight: 7.5 lbs. / 3.25 kg.




Compatible with:
LED RC2
(Sold Separately)

Code: 1226100277

Photometric

WW	D40	2530	690	216	137.6	88.5
CW	D40	3220	786	350	198	128
Amber	D40	2020	507	218	123	79
min/cor	D40	8760	1635	733	393	255



Cool, Warm White & Amber Color Mixing:



MEGA PAR PROFILE PLUS™

NEW

- Light Source: Ultra bright slim flat black Par with 107 x 10mm LEDs
- Smooth RGB+UV Color Mixing (26 Red, 45 Green, 36 Blue LEDs + 1x 3W UV LED)
- DMX-512 protocol / 5 DMX Channel modes: 4/5/6/9/10 channels
- 5 Operational modes: RGB+UV Dimmer Mode, Sound Active Mode, Auto Run Mode, Static Color Mode, & DMX Controlled
- 16 Sound Active shows / 64 built-in Color Macros
- 32 Built-in shows (16 Color Changing Shows & 16 Color Fading Shows)
- 5 Dimmer Curves (Standard, Stage, TV, Architectural, & Theatre)
- Beam Angle: 30 degrees / Power Draw: 16W Max
- IEC AC IN/OUT on rear to daisy chain power (up to 33 @ 120V and 60 @ 230V)
- Dimensions LxWxH : 225x 220x 85mm
- Weight: 3 lbs. / 1.1 kg.



Code: 1226200045




Compatible with:
LED RC2
(Sold Separately)

RGB Color Mixing + UV:



	R	G	B	UV
Beam Angle	235	75	38	22
30°	518	173	86	34
B	530	176	76	38
UV	77	21	7	8.8
RGB	1208	318	158	84
min/cor	1327	345	164	92



ULTRA HEX BAR 6™

- Ultra bright, 23-inch (1.5 meter) indoor Linear Bar with 6 x 10W Ultra bright HEX (RGBWA + UV: 6-IN-1) LEDs
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- 5 DMX Channel Modes: 6, 7, 8, 12 or 18 channels
- 6 operational modes: Auto Run, Program Mode, Sound Active, RGBWA + UV Dimmer, Static Color and DMX-512 Mode
- Patent Pending Quick Align (Magnetic)
- Beam Angle: 40 degrees
- Flicker Free operation (No flickering on camera)
- 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- 2x8 Character LCD Display
- Electronic Dimming: 0-100%



Code: 1226200044



RGBAW Color Mixing + UV:



ULTRA HEX PAR3™

- Light Source: 3x 10-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- Ultra bright, flat Par 38 wash fixture with 3x Red, Green, Blue, Amber, White & UV LED pixels
- 5 DMX Modes: 6, 7, 8, 11 & 12 channel
- 5 Operational modes: Static Color, Dimmer, Auto Run, Sound Active and DMX Controlled
- Beam angle: 40-degree
- Power Draw: 26W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions LxWxH : 224 x 213 x 120mm
- Weight: 5 lbs. / 2.02 kgs




Code: 1226100274



Photometric

Beam Angle 40°	R	G	B	W	UV	Intensity (lm)
	460	125	98	31	20	
	481	128	95	31	21	
	359	106	82	22	17	
	624	174	78	41	26	
	261	70	29	17	9	
	97	21	16.1	9.7	3.8	
	1947	561	251	140	91	



RGBAW Color Mixing + UV:



5P HEX™

- Ultra bright, flat wash fixture with 5 x Red, Green, Blue, Amber, White & UV LED pixels
- Smooth RGBAW + UV color mixing
- Great as an architectural wall wash or for performance stages where traditional stage lighting emit a lot of heat onto performers
- Intelligently designed, patent pending power & DMX Ins/Outs sit sideways so the unit can be set flat on the ground or set inside truss
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW + UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs | 63 built-in Color Macros
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 30-degree
- Dimensions LxWxH : 210 x 100 x 220mm
- Weight: 2 kg



Code: 1226100279



RGBAW Color Mixing + UV:



5P HEX PEARL™

NEW

- Light Source: 5 x 10-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- Smooth RGBAW + UV color mixing
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs / 63 built-in Color Macros
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- Compatible with Dotz Par RF wireless remote control (sold separately)
- Data linkable via 3-pin XLR cables / Power linkable via IEC power cables
- Multi-voltage operation: AC 100-240V, 50/60Hz (IEC power In/Out)
- Dimensions LxWxH : 210 x 100 x 220mm
- Weight: 5 lbs. / 2 kgs



Code: 1226100291



ADJ RFC
(Sold Separately)

RGBAW Color Mixing + UV:



Photometric					
R	862	152	70	48	27
G	1121	306	138	78	45
B	1030	283	130	75	48
W	1544	410	187	101	62
A	387	100	45	28	20
UV	313	81	37	21	14
Intensity	4420	1220	581	318	210

Beam Angle

30°

100%



12P HEX™

NEW

- Light Source: 12x 12-Watt RGBAW + UV LEDs, (Rated at approximately 50,000 hrs.)
- 4 DMX Modes: 6, 7, 8, & 12 channel
- 5 Operational modes: Static Color Mode, RGBAW & UV Dimmer Mode, Program Mode, Sound Active Mode and DMX Controlled
- 7 Built-In Programs / 63 built-in Color Macros / Flicker Free operation (No flickering on camera)
- 5 selectable Dimmer Curves (Standard, Stage, TV, Architectural & Theatre)
- Beam angle: 30-degree
- Compatible with Dotz Par RF wireless remote control (sold separately)
- Power link via IEC power cables. (6x 12P Hex's Max @ 110V, 13x 12P Hex's Max @ 240V)
- Dimensions LxWxH : 298 x 249 x 136mm
- Weight: 9 lbs. / 3.9 kgs



Code: 1226100290



ADJ RFC
(Sold Separately)

RGBAW Color Mixing + UV:




Photometric					
R	1024	312	150	85	55
G	2180	641	305	172	112
B	2990	805	378	217	135
W	3920	910	428	247	162
A	1195	361	179	104	70
UV	442	134	67	38	26
Intensity	10890	2770	1330	733	455

Beam Angle

30°

100%



Code: 1226100257



WiFLY PAR QAS5™

- Light Source: 5 X 5W Quad RGBAW (Red, Green, Blue, Amber) LED
- Lithium Battery powered Par Fixture with built in Wireless DMX Control
- 6.5 Hours of operation at full on; 5 Hour Full Charge time
- 25° Beam Angle; up to 500' range for wireless DMX signal control
- DMX Modes : 1,2,3,4,5,6,7, or 8 channels: 3 PIN DMX In/Out
- AC Power Consumption: .50 Amps @ 110V; .25 Amps @ 220V
- Dimensions LxWxH : 265 x 240 x 164mm
- Weight: 10 lbs/ 4.2 kg



ADJ RFC
(Sold Separately)



Compatible With:
WiFLY RCWB3C
(Sold Separately)



Compatible With:
WiFLY WLC16
(Sold Separately)



Compatible With:
WiFLY Transceiver
(Sold Separately)




R	2750	704	307	150	98
G	2260	549	247	142	84
B	2740	775	364	188	108
W	2860	769	396	168	82
RGBW	9650	2730	1184	611	384

Beam Angle

25°

100%





Code: 1226100270



YouTube



Product Video

WiFLY PAR QA5 WH™

- Light Source: 5 X 5W Quad RGBA (Red, Green, Blue, Amber) LED
- Lithium Battery powered Par Fixture with built in Wireless DMX Control
- 6.5 Hours of operation at full on; 5 Hour Full Charge time
- 25° Beam Angle; up to 500' range for wireless DMX signal control
- DMX Modes : 1,2,3,4,5,6,7, or 8 channels: 3 PIN DMX In/Out
- AC Power Consumption : .50 Amps @ 110V; .25 Amps @ 220V
- Dimensions: LxWxH : 265 x 240 x 164mm
- Weight: 10 lbs/ 4.2 kg



ADJ RFC
(Sold Separately)



Compatible With:
WiFLY KC#WBC
(Sold Separately)




Compatible With:
WiFLY WL16
(Sold Separately)



Compatible With:
WiFLY Transceiver
(Sold Separately)

Beam Angle 25°	R	2750	704	307	150	65
	G	2290	569	247	142	64
	B	2740	775	364	189	108
	W	2680	769	296	168	82
	(RGBA)	9650	2730	1184	611	384




WiFLY QA5 IP™

- Light Source: 5x 5-Watt QUAD LEDs
- IP65, Outdoor Rated par fixture
- ADJ's WiFLY wireless DMX built-in.
- 8 Operational modes: Manual Color; Color Change; Color Jumping; Color Dreaming; Auto (Program Run); Sound Active, WiFLY and DMX Controlled
- Beam angle: 40-degree and 64 built-in Color Macros
- 4-Pin Power AC IN/OUT outlets on rear to daisy chain power (up to 15 units)
- Power Draw: 35W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions: LxWxH : 250 x 190 x 300mm
- Weight: 10 lbs. / 4.2 kg.

Photometric

Beam Angle 40°	R	1071	273	114.7	62.3	40.8
	G	1245	304	132.4	88.9	46.5
	B	1169	291	121	87.4	44.5
	A	556	140	58	32	21
	RGBA	3520	980	389	228	136.1



YouTube



Product Video



Code: 1226100273



ADJ RFC
(Sold Separately)



WiFLY EXR HEX5 IP™

NEW

- LED Source: 5x 5-Watt HEX LEDs (Red, Green, Blue, White & Amber + UV)
- Rechargeable Lithium battery powered, with wireless DMX, IP65, & Outdoor Rated
- Built-in WiFLY wireless DMX: compatible with ADJ's WiFLY Transceiver (sold separately)
- 5 DMX Channel modes: 4, 5, 6, 10 or 11 channel modes / Beam angle: 25-degree
- 6 Operational modes: Static Color; RGBAW + UV Dimmer Mode; Color Change; Color Fade; Auto Run (Program Run); and DMX Controlled
- 16 Color Change Modes / 16 Color Fade Modes / 64 built-in Color Macros
- LED pulse and strobe effect / Flicker Free Operation / Electronic Dimming: 0 - 100%
- 4-Pin Power AC IN/OUT outlets on rear to daisy chain power (up to 11 units)
- Power Draw: 50W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions: LxWxH : 310 x 280 x 194mm
- Weight: 12 lbs. / 5.48 kg.



Code: 1226100293



RGBAW Color Mixing + UV:



WIFLY EXR QA5 IP™

NEW

- Light Source: 5x 5-Watt QUAD LEDs (Red, Green, Blue & Amber)
- Rechargeable Lithium battery powered, with wireless DMX, IP65, & Outdoor Rated
- Built-in WiFLY wireless DMX: compatible with ADJ's WiFLY Transceiver (sold separately)
- 5 DMX Channel modes: 4, 5, 6, 10 or 11 channel modes
- LED pulse and strobe effect / Flicker Free Operation / Electronic Dimming: 0 - 100%
- Beam angle: 40-degree
- 5 Operational modes
- 64 built-in Color Macros
- Power Draw: 35W total (All LED's @ Full On)
- Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions LxWxH : 254 x 190.5 x 299.5 mm
- Weight: 9.25 lbs. / 4.2 kg



Code:1226100292



RGBA Color Mixing::



WIFLY EXR QA12BAR IP™

NEW

- Light Source: IP65, Outdoor Rated, par fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBA- Red, Green, Blue & Amber LEDs, rated at approximately 50,000 hrs)
- 4-button DMX Menu display on rear
- Built-in WiFLY wireless DMX: compatible with ADJ's WiFLY Transceiver (sold separately)
- Creates no RGBA shadows / 64 built-in Color Macros
- Compatible with ADJ RFC wireless remote control (sold separately)
- Modes: Color Change; Color Jumping; Color Dreaming: Auto (Program Run); Sound Active,
- WiFLY and DMX Controlled
- DMX Channel modes: 4, 6, 7, 8, 9, 12 and 14
- Beam angle: 25-degree / Linkable via 3-pin IP cable (In/Out)
- Total power consumption: 75W / Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions LxWxH : 1029 x 140 x 152 mm
- Weight: 14 lb. / 6.4 kg.



Code:1226100294



RGBA Color Mixing::



MyDMX Buddy™

NEW

- 256 DMX Channel, Software based, Control System.
- For use with any DMX512 compatible fixtures
- Easy Setup, Programming and Playback
- Upgrades available at dmxsoft.com (3D Visualizer, Easy Remote, Midi-Control, Stand Alone capability)
- Fixture Library Includes over 10,000 Fixture profiles from over 500 Manufactures
- Compatible with myDMX 2.0. For PC & Mac
- Compatible with Mac OS and Windows,
- 32 & 64-bit (XP, Vista, 7 & 8)
- Dimensions LxW: 75 x 18mm



Included a 256 DMX Channel, entry level version of myDMX2.0*



Code: 131000030

*MyDMX Buddy is a scaled down, entry level version of myDMX 2.0. Out of the package, myDMX software will run in limited mode: 3D visualizer, Easy Remote, Midi features or Stand-Along Mode (the stand-Along/Scene button of MyDMX Buddy) and other features like 512 DMX channel control via MyDMX Buddy can be purchased as upgrades:

WiFLY NE1™

- DMX512 Controller for anyone! Ideal for DJ's, Bars and small Nightclubs
- Control up to 12 individual fixtures
- Built-In Wifi Transmitter
- Built-In Effects Generator for RGB LED's and ML's
- 12 Memory's
- Blue backlit menu display & Backlit function buttons
- 4 Rotary encoders for channel & function control
- Independent Strobe Rate fader and button (Latch & Momentary)
- Independent Master Dimmer fader
- Universal USB port
- On/Off power switch
- 3 pin XLR DMX output connector
- 9-12VDC, 300mA power supply (Included)

NEW



Code: 1226100296



WiFLY BATTERY™

- Battery powered wireless DMX transceiver (transmitter/receiver in one)
- Battery Life: Up to 20 hours
- Battery life and WIFLY wireless signal strength indicators on side panel
- Magnetic bottom plate for temporary, quick and easy mounting to metal fixtures or objects
- Compatible with all ADJ WIFLY products
- Transmission distance up to 150m/500 feet (open line of sight)
- One transmitter can send to many receivers using the same radio channel
- Receivers automatically listen for transmitters (no pairing required)
- Supports up to 16 DMX-512 universes
- Dip Switches to select from 16 different radio channels (one DMX universe per channel)
- 3-pin & 5-pin DMX In/Out
- Wireless Frequency: 2.4 GHz DSSS
- Power Supply: DC 9-12V (AC or DC powered)
- Dimensions 148 x 135 x 62mm
- Weight: 0.75 kg.




Code: 1226100278



WiFLY WLC16™

Code: 1322000045

- 512 channel DMX Controller with ADJ's WiFLY Transceiver Wireless DMX on-board
- 16 fixtures, up to 32 channels each & 16 Sliders for manual control of channels
- 30 Banks of 16 programmable scenes
- 6 Programmable chases of 480 scenes
- Auto mode controlled by speed and fade time sliders
- Master blackout function
- Password Protection
- Speed and Fade control
- Tap Sync Speed / Sound trigger override
- Built in microphone for sound triggering
- Power failure memory
- 16 x 2 character backlit digital display
- On-board SD card slot (2GB SD Card is included. Supports up to 4GB max)
- All programmed data is stored onto the SD card.
- Voltage Operation: DC12V 500mA min
- Dimensions LxWxH : 482 x 155 x 70mm (19-inch rack mount, 3.5 spaces)
- Weight: 6 lbs. / 2.7 kg.

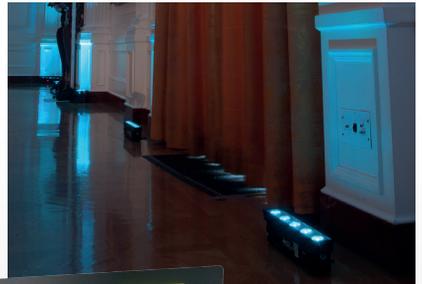

Code: 1322000045




EZ KLING™

- ART-NET to DMX and Kling-Net to DMX interface
- Allows users to pixel map DMX compatible fixtures through the Kling-Net mapper included in Media Master Express and Media Master Pro (Zeus)
- Ideal for use with Flex Pixel Tape and Pixel controllable DMX fixtures
- One EZ Kling interface will drive up to 600 Flex Pixel RGB pixels and 150 DMX Pixels
- 4-button LCD control menu
- Dimensions: LxWxH : 135 x 125 x 41mm
- Weight: 2 lbs. / 0.7 kg.



Code: 132100070

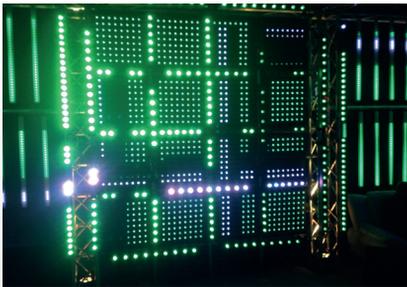

Code: 1222300016




ULTRA KLING BAR18™

- Light Source: 18x 3W Tri LEDs Pixel Bar
- 5 Operational Modes
- 7 DMX Channel Modes
- Built-In Programs & Color Macros
- Electronic Dimming 0-100%
- Kling Net & Art-Net Control via RJ45 In/Out
- Individual Pixel Control
- Power Connection: IEC AC In/out
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 1100 X 80 X 116mm
- Weight: 13 lbs / 6 kgs

Photometric

R	712	318	161	105	67
G	696	283	147	95	52
B	638	291	138	78	48
RGB	1750	810	393	239	157



FLASH KLING PANEL 64™

- Light Source: 64 x SMD RGB LED's (8x8 Matrix Configuration)
- LED Pixel panel for, low resolution, video displays
- 120-Degree Beam Angle
- Operational Mode: KlingNet and ArtNet compatible. Recommended control solutions; Arkoas Media Master Express, Media Master Pro and LED Master software's (sold separately).
- Link up to 100 Flash Kling Panel 64's
- RJ45 In/Out
- Power Connection: IEC AC In/out
- Power Consumption: 20W (Full On)
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 500 X 500 X 63mm
- Weight: 12 lbs / 5.6 kgs



Code: 1226300029

PINPOINT GO™

NEW

- Light Source: 3W single white LED
- Portable & Easy to Use
- Battery charge time: 4.5 hours
- The battery life with Energy saving mode: 21 hours
- The battery life on full on: 12.5 hours
- Rechargeable Battery
- Included Frost Filter
- Red, Blue Green Color Filters
- IR Remote Option
- Magnetic Bracket for easy quick install on metal surfaces
- X-CLIP Bracket for mounting on drop ceiling frames



Color Temperature: "Cool White"

Code: 1212200021

PINPOINT GO TW™

NEW

- Light Source: 3x 3W (1x Warm White, 1x Cool White, 1x Amber) LEDs
- Portable & Easy to Use
- Battery charge time: 4.5 hours
- The battery life with Energy saving mode: 12 hours
- The battery life on full on: 4 hours
- Rechargeable Battery
- Included Frost Filter
- IR Remote Option
- Magnetic Bracket for easy quick install on metal surfaces
- X-CLIP Bracket for mounting on drop ceiling frames



Cool White - Warm White Mixing + Amber:

Code: 1212100013

PINPOINT GO COLOR™

NEW

- Light Source: 3W RGBA Quad LED
- Portable & Easy to Use
- Battery charge time: 4.5 hours
- The battery life with Energy saving mode: 12.5 hours
- The battery life on full on: 4.5 hours
- Rechargeable Battery
- Included Frost Filter
- IR Remote Option
- Magnetic Bracket for easy quick install on metal surfaces.
- X-CLIP Bracket for mounting on drop ceiling frames.



RGB Colors Mixing

Code: 1212100012

SUPER SPOT LED™

NEW

- Light Source: 10W High Output LED Pinpoint (Rated at approximately 50,000 hours)
- Operational Modes: DMX Controlled / Sound Active / IR Remote / Auto Run Programs
- Beam Angle: 3-Degrees
- Lumens: 740 @ 1M at 15°
- 2 DMX Channel | DMX Connections: 3-Pin DMX In / Out
- Dimming: Adjustable via IR remote
- Shutter / Strobe: Adjustable via IR remote
- Flicker free
- Optional Accessory: UC-IR Remote sold separately
- Power Consumption: 13.3W Max
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 175 x 189 x 211mm
- Weight: 4 lbs / 1.6 kgs



UC-IR (Not Included)



Product Video



Color Temperature: "Cool White"

Code: 1212100011

PINSPOT LED QUAD DMX™

- 8W Quad (4-in-1) RGBW LED Pinspot (Rated at approximately 10,000 hours)
- Operational Modes: DMX Controlled / Sound Active / IR Remote / Auto Run Programs
- Beam Angle: 15-Degrees
- Lumens: 740 @ 1M at 15°
- DMX Channel: 6 Channel; DMX Connections: 3-Pin DMX In / Out
- Dimming: Adjustable via IR remote; Shutter / Strobe: Adjustable via IR remote
- ADJ UC3 Remote included
- Power Consumption: 11W Max
- Input Voltage: AC 100V-240V 50/60Hz
- Dimensions: 205x98x61mm
- Weight: 1 lbs / 0.4kgs



UC-IR Remote included

Code: 1212100010

EVENT BAR PRO™

Code: 1232400003

- Light Source: 4 x 10W (10000K) white LED
- Each Pinspot's colors and movements may be individually controlled via DMX
- 8 Built-in Shows
- Beam angle: 3-degree
- Linkable: DMX via 3-pin XLR cable; Power via IEC daisy-chain power or link (Up to 5 Event Bar Pro's @ 120V, up to 8 Event Bar Pro's @ 230V)
- Compatible with American DJ UC3 Series easy-to-use controllers (sold Separately)
- Long Life LEDs (Rated at approximately 50,000 hrs.)
- Power Consumption: 85W (All LED's @ Full On)
- Multi-voltage Operation: AC 100 - 240V, 50/60Hz
- Dimensions LxWxH : 1033 x 83 x 270mm
- Weight: 29 lbs. / 11 kg.



Product Video



Compatible with UC3 Series

UC3 RC Receive



UC3 RC System



UC3 Footcontroller



LIGHTNING COB CANNON™

- Super Bright, high output, 100W LED white strobe cannon
- Advanced COB Technology (Chip On Board) produces powerful, high output white light
- 3 Operation modes: Sound Active, Manual, & DMX
- 3 DMX Operation modes: 1, 2 & 3 channel
- 4-button digital display
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 33 degrees - Dimensions LxWxH : 320 x 278 x 200mm
- Weight: 11 lbs. / 4.98kgs

Code: 121520025



Product Video

UV COB CANNON™

- Super high output 100W LED UV light cannon
- Great for performance stages, theatrical productions and special effects productions – requires almost no maintenance – low heat, low power consumption
- Advanced COB Technology (Chip On Board) produces powerful, smooth UV color
- 3 Operation modes: Sound Active, Manual, & DMX
- 3 DMX Channel modes: 1, 2 or 3 channel
- 4-button digital DMX display
- Flicker Free operation (No flickering on camera)
- 5 selectable Dim Curves (Standard, Stage, TV, Architectural & Theatre)
- LED pulse and strobe effect
- Electronic Dimming: 0 - 100%
- Beam angle: 33 degrees

Code: 1224100006



Product Video

FOG FURY JETT™

- 680W professional DMX colour Fog Machine / Warm-up time: 9 min
- ADJ's Electronic Thermo Sensing (ETS) technology
- Automatic circuit cut-off to protect pump if fog fluid tank runs dry
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- 3 Operational modes: Manual, Remote Control, or DMX Controlled / 4 DMX Channels
- External fog fluid tank: 3 Liter / Fog Output: 20,000 (cu.ft./min)
- Tank can be mounted to either front or rear
- Included Accessory: ADJ FF23TC - wireless remote
- Power Connection: IEC AC In
- Light Source: 12 x 3w RGBA LED's, (3 Red, 3 Green, 3 Blue & 3 Amber LED's)
- Voltage: AC 120V, 230 or 240 50/60Hz (non switching)
- Dimensions LxWxH : 397 x 302 x 191mm
- Weight: 16 lbs. / 7.1 kg.

NEW



YouTube
Product Video



Code: 1411100017



Remote Control (Included)
VFFR Timer Remote



VF FLURRY™

- 600W mobile Snow Machine
- Spray distance: 2-5 meters
- Volume selection switch: Low or high snow output
- Snow fluid sensor to protect pump
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes wired remote
- On/Off switch on rear panel
- Uses water based snow fluid
- Dimensions LxWxH : 340x255x200mm
- Weight: 8 lbs. / 3.8 kg.



Remote Control (Included)

VFFR Timer Remote



Code: 1223100002



YouTube
Product Video

FOG FURY FAZE™

- 700W portable, high output Faze Machine
- High performance pump for optimum output
- ADJ's Electronic Thermo Sensing (ETS) technology
- Automatic circuit cut-off to protect pump if fog fluid tank runs dry
- Special heating element design that uses an oil type transmission pipeline system to minimize the possibility clogging
- LED heating indicator system in tank; Low Fluid Indicator on rear
- Warm-up time: 5 min
- External fog fluid tank: 2 Liter; Fog Output: 1,000 (cu.ft./min) | 28m³/min.
- Included Accessory: ADJ FF23TC - 25 ft wired timer remote
- Uses water based fog fluid
- Dimensions LxWxH : 376 x 250 x 212mm
- Weight: 14 lbs. / 6.2 kg.



Compatible Remotes

FFFR Timer Remote

FF23WR Wireless Remote



Code: 1411100010



YouTube
Product Video

FOG FURY 3000 WiFLY™

- Easy-to-use high output portable fog Machine
- 3 Operational modes: Fog Volume, Fog Duration, & DMX Controlled
- 3 DMX Channel
- ADJ's WiFLY wireless DMX built-in.
- 4-button DMX LCD display on rear panel
- ETS "Electronic Thermo Sensing" to always maintain optimum heat.
- Cut off Circuit to protect pump if fog liquid tank runs dry
- Fluid LED color ready tank indicator
- Heater: 1500W
- Fog Output: 21000 (cu.ft./min) | 594m³/min.
- Warm up time (min): 8
- Tank(liter): 5 L
- Single yoke to mount on a ceiling or from truss
- Power Consumption: 1600W (Full On)
- Voltage Operation: AC 120 or 230V, 50/60Hz
- Dimensions LxWxH : 475 x 345 x 321mm
- Weight: 25 lbs. / 11.28 kgs



Remote Control (Included)
FF23TR Timer Remote



Optional (Not Included)
FF23WR Wireless Remote



Code: 141110009



VF1600™

- 1500W mobile DMX Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for constant heating
- Fog fluid sensor to protect pump
- Warm-up time: 8 minutes
- Output: 20,000 cubic ft. per min
- External fog fluid tank: 2.3 Liter
- Includes wired remote (Wireless remote control sold separately)
- Fog output switch on rear panel
- 3-pin DMX In/Out
- Uses water based fog fluid
- Dimensions LxWxH : 495x355x230mm
- Weight: 22 lbs. / 10 kg.



Remote Control (Included)
VFTR Timer Remote



Optional (Also Included)
VFWR2 Wireless Remote



Code: 1411100016



VF1300™

- 1300W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 7 minutes
- Output: 12,000 cubic ft. per min | 340m³/min.
- External fog fluid tank: 2.3 Liter
- Includes remote
- Fog output switch on rear panel
- Only use high quality, water based fog fluid
- Dimensions LxWxH : 445x315x200mm
- Weight: 15 lbs. / 7 lbs.



Remote Control (Included)
VF5PR Timer Remote



Optional (Included)
VFWR2 Wireless Remote



Optional (Not Included)
VFTR13 Timer Remote



Code: 1411100015



VF1000™

- 1000W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Electronic Thermo Sensing (ETS) for optimum heating levels
- Low fog fluid shut off sensor to protect pump
- Warm-up time: 6 minutes
- Output: 8,000 cubic ft. per min | 227m³/min.
- Internal fog fluid tank: 1 Liter
- Fluid level indicator
- Includes remote
- Fog output switch on rear panel
- Only use high quality, water based fog fluid
- Dimensions LxWxH : 340x255x190mm
- Weight: 9 lbs. / 4 kg.



**Remote Control
(Included)**

VF5PR Timer Remote



**Optional
(Included)**

VFWR Wireless Remote



**Optional
(Not Included)**

VFTR13 Timer Remote



Code: 1411100014



VF400™

- 400W mobile Fog Machine
- High efficiency heater block burns through fog with less residue
- Warm-up time: 5 minutes
- Output: 3,000 cubic ft. per min | 85m³/min.
- Internal fog fluid tank: 0.5 Liter
- Fluid level indicator
- Includes hardwired remote
- Only use high quality, water based fog fluid
- Dimensions LxWxH : 240x200x140mm
- Weight: 4 lbs. / 2 kg.



Remote Control (Included)

VF400R Timer Remote



Code: 1411100013



Fluid for fog machines to create long lasting smoke and fog effects. To use in professional applications like shows, concerts, clubs or theaters. - Water-glycol based

Fog juice 1 light - 1 Liter™

Code: 1421200023

Fog Juice 1 light: made for making laser and light shows visible

Fog juice 2 medium - 1 Liter™

Code: 1421200024

Fog Juice 1 medium: Standard fog juice for all kind of applications. Most time used in club, disco and party

Fog juice 3 heavy - 1 Liter™

Code: 1421200025

Fog Juice 1 heavy: Long lasting, intense juice for white plum of fog. Made for show effects or for long lasting effects.



1 L

EVENT FACADE™ / EVENT FACADE BL™

- Metal frame & scrim Offered in White (EVE799) or Black (EVE818)
- Made out of strong and light weight aluminum.
- Includes a carrying bag to store and keep facade scrim looking best.
- Detachable hinges make it easy for storage.
- Fire Retardant easy to remove scrim.
- Scrim to be washed by hand in cold water, lay flat to dry.
Do not twist to avoid deformation
- Dimensions LxWxH :
Complete Stand: 2800 x 25.4 x 1200mm
Each Panel: 700 x 25.4 x 1200mm
Bag: 1260 x 760 x 140mm
- Weight: 32 lbs. / 14.5 kgs.

NEW



Product Video



EVENT FACADE BL™

Code: 1731000016

EVENT FACADE™

Code: 1731000015



EVENT FACADE TT™

- Black metal frame; black and white scrim included
- Made out of strong and light weight aluminum.
- Includes a carrying bag to store and keep facade scrim looking best.
- Detachable hinges make it easy for storage.
- Fire Retardant easy to remove scrim.
- Scrim to be washed by hand in cold water, lay flat to dry.
Do not twist to avoid deformation
- Dimensions LxWxH :
Complete Stand: 2400 x 25.4 x 400mm
Panel 1: 700 x 25.4 x 400mm
Panel 2: 500 x 25 x 400mm
Bag: 790 x 505 x 140mm
- Weight: 12 lbs. / 5.5 kgs.

NEW



Product Video



Code: 1154000044



Your strong partner for strong business!



► LARGE PRODUCTION CAPACITY IN E.U.

► EXCELLENT LOGISTICS AND AVAILABILITY

► TÜV MONITORED PRODUCTION

► HIGH QUALITY MANUFACTURING FOR DECADES

TRUSSING | COUPLER | FABRICS | STAGE

DuraTruss B.V. 6468 EW Kerkrade
Junostraat 2 The Netherlands

www.duratruss.eu

ACF TOUR CASE INNO 4™

The Inno Color Beam Case offers maximum protection for 4 Inno Color Beam Series moving heads

- Solid 7 mm thick plywood
- Strong aluminium profiles
- Heavy duty handles
- Steel ball corners
- 4 wheels
- Butterflylocks
- Color: black



Suitable for: Inno Color Beam Z7
Inno Color Beam LED
Inno Color Beam Quad 7



Code: 1521000184

ACF-SW/DUO CASE FOR ADJ VIZI HYBRID 2R™

This DUO moving head flight case offers maximum protection for two ADJ VIZI Beam Hybrid 2R.

- Solid 7mm thick plywood
- Strong aluminium profiles
- Heavy duty handles
- Steel ball corners
- 4 wheels
- Butterflylocks
- Color: black



Code: 1521000201

ACF-SW/DUO VIZI BEAM/SPOT 5R™

This DUO moving head flight case offers maximum protection for two ADJ VIZI Beam 5R, VIZI Spot 5R or similar.

- Solid 7mm thick plywood
- Strong aluminium profiles
- Heavy duty handles
- Steel ball corners
- 4 wheels
- Butterflylocks
- Color: black



Code: 1521000135

TOURING CASE 4X INNO SPOT PRO™

Heavy Duty Tour Case -Protects your Equipment during transport

- Butterfly latches
- Steel Ball corners and aluminium profiles
- 8 flip handles
- Foam inlay
- 100mm Blue Wheels
- 2 variable separating plates
- 4 castor dishes on the top
- Dimensions inside:

- Height w/o top : 54 cm | Height top: 9 cm | Width: 76 cm | Depth: 53 cm
- - Dimensions outside (HxWxD): 80 cm x 81 cm x 58 cm



Code: 1521000224

TOURING CASE 4X INNO COLOR BEAM Z19™


- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 765mm x 615mm x 470mm
- Height with wheels 590mm
- Storage for cables WxH 470mm x 85mm



Code: 1521000221

TOURING CASE 2X INNO SPOT ELITE™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 685mm x 570mm x 425mm
- Height with wheels 690mm

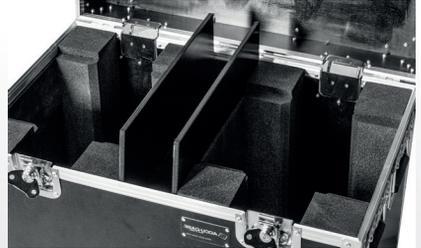

Code: 1521000222

TOURING CASE 4X MATRIX BEAM™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 645mm x 600mm x 65mm
- with wheels H 770mm



Code: 1521000223

TOURING CASE 4X INNO SPOT PRO™

- Solid 6,5mm thick plywood
- Strong aluminum profiles
- Duty handles
- Steel ball corners
- 4 wheels for easy transportation
- 2 Butterfly locks
- Color Black
- Measurements: LxWxH 805mm x 460mm x 500mm
- Height with wheels 620mm



Code: 1521000224



www.adj.eu



INNO POCKET SERIES



AMERICAN AUDIO®



twitter.com/americanadj_eu
facebook.com/ADJEurope
youtube.com/adjlighting

ACCU-CASE™
PLAY IT SAFE...

ACCU-CABLE™
EXTEND YOUR WORLD...

www.adj.com - Los Angeles, USA - Miami, USA - Kerkrade, Netherlands - Guangzhou, China
www.adj.eu - ADJ Supply Europe B.V. - Junostraat 2 - 6468 EW Kerkrade - The Netherlands