





MOBIL TRUSS®

STRUCTURE ALU QUATRO 290

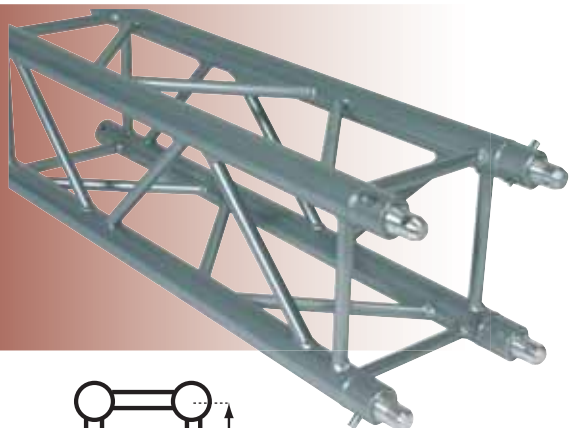

Les structures QUATRO sont fournies avec le QUATRO KIT à l'exception des angles
 Every QUATRO length includes a connexion QUATRO KIT

Tube d'aluminium extrudé (poids de la structure au mètre : 7kg.) 50 mm x 2 mm, traverses 20 mm x 2 mm
 Extruded Aluminium profile (QUATRO 290 trussing weights 7kg/m) Main tubes 50 mm x 2 mm, braces 20 mm x 2 mm

QUATRO 40025

Structure QUATRO 290 long 0,25m



QUATRO 40105

Structure QUATRO 290 long 0,5m



QUATRO 40110

Structure QUATRO 290 long 1,00m




QUATRO 40120

Structure QUATRO 290 long 2,00m



QUATRO 40130

Structure QUATRO 290 long 3,00m



	4 m	5 m	6 m	7 m	8m	9 m	10 m	11 m	12 m	13 m	14 m
	1300 kg	1200 kg	1100 kg	1050 kg	1040 kg	1020 kg	1000 kg	915 kg	775 kg	555 kg	340 kg
Deflection in mm	12 mm	17 mm	24 mm	39 mm	48 mm	69 mm	98 mm	108 mm	119 mm	121 mm	74 mm
	645 kg	600 kg	560 kg	525 kg	510 kg	500 kg	465 kg	445 kg	385 kg	265 kg	180 kg
Deflection in mm	7 mm	12 mm	18 mm	28 mm	37 mm	50 mm	73 mm	83 mm	93 mm	83 mm	75 mm

Tests effectués en utilisation charge par **apave** (certification APAVE rapport n° 203.30.24/OA)

ATTENTION : Ne jamais dépasser les charges indiquées dans la tableau ci-dessus.

QUATRO figures are based on load position. Safety certification by **apave** (certification APAVE rep. n° 203.30.24/OA)

BE CAREFULL : Never overpass the load specifications

QUATRO KIT



QUATRO BASE



QUATRO BASE KIT



BASE 800



- Quatro Base kit vendu à part
- Nuts sold separately
- Size: 350 x 350mm.

- Diam: 800mm.
- Weight: 78Kg.

QUATRO MAGIC BOX



Multi connection angle
 2-way junction up to a 6-way one
 - 290 x 290 mm.

QUATRO MAGIC KIT



BOX.KIT.105 / BOX.KIT.210

ADM 105/121



- ADM 105 : 105mm.
- ADM 121 : 121mm.

PMA 290




- Size: 460 x 460 x 600mm.
- Weight: 10,5Kg.




MOBIL TRUSS®

A 40210




A = 1000mm.

A 40310




A = 1000mm.

A 40405




A = 500mm.

A 40505




A = 500mm.

A 40605




A = 500mm.

A 40705




A = 500mm.

A 40805




A * B = 500mm.

A 40905




A * B * C = 500mm.

A 41105



A * B = 500mm.

A 41005



A * B * C = 500mm.

TRIO.QUATRO AV



Variable angular adjustment between 0° up to 180° degrees

UNO



For attachments and for fixing drop cloth

UNO 10105

Dimensions 500 x 50 mm

UNO 10110

Dimensions 1000 x 50 mm

UNO 10120

Dimensions 2000 x 50 mm
connection kit is included

TRIO.QUATRO LYRE



Tube diameter 50 mm
Max weight load capacity 40 KG or lower weight
Truss system compatibility TRIO and QUATRO 290
Dimensions 500 x 790 x 340 mm
Weight 3.5 kg
Additional products TRIO BASE KIT, QUATRO BASE KIT, base 80 TRIO 290 & QUATRO 290